

# Mechanical Jaw Pullers

## 1-25 Ton Capacity, 2 & 2/3 Jaw Pullers

Pullers designed to pull gears, bearings and countless other press fitted parts.





**Choosing the right size puller:**  
Compare the "reach" and "spread" of the pulling job with that of the pullers listed. The puller selected must have dimensions greater than those of the job.



Fed. Spec.: GGG-P-00781-D

- Grip-O-Matic® feature on all pullers. The harder the pull, the tighter the grip for removing gears, bearings and countless other press fitted parts.
- 2-way, 3-way and 2/3 way combination pullers make it easy to select a specific puller for a specific application.
- Forged from high quality steel, heat treated and subjected to rigorous tests which exceed rated puller capacity.
- Alloy steel heads are forged for maximum strength.
- Forcing screw threads are rolled, not cut. This process creates a smoother and stronger thread.
- Heat treated alloy steel cross bolts for maximum shear strength.
- Machined puller jaw toes produce larger and stronger pulling toes.

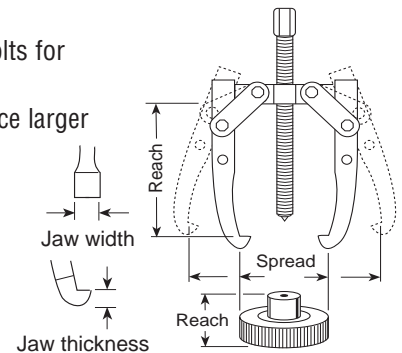

### 1 ton capacity, standard jaw puller

#### 2 Jaw

- A No. 1020** – Wt., 0.3 lb.  
Reach: 2<sup>1</sup>/<sub>8</sub>" max.  
Spread: 3<sup>1</sup>/<sub>4</sub>" max.  
Screw Size: 5<sup>1</sup>/<sub>16</sub>"-24 x 3<sup>7</sup>/<sub>8</sub>" lg.

#### 3 Jaw

- B No. 1021** – Wt., 0.5 lb.  
Reach: 2<sup>1</sup>/<sub>8</sub>" max.  
Spread: 3<sup>1</sup>/<sub>4</sub>" max.  
Screw Size: 5<sup>1</sup>/<sub>16</sub>"-24 x 3<sup>7</sup>/<sub>8</sub>" lg.

### 2 ton capacity, reversible jaw puller

#### 2 Jaw\*

- C No. 1022** – Wt., 0.9 lb.  
Reach: 3<sup>3</sup>/<sub>8</sub>" max.  
Spread: 4" max.  
Screw Size: 3<sup>1</sup>/<sub>8</sub>"-24 x 4<sup>7</sup>/<sub>8</sub>" lg.

#### 2/3 Jaw\*

- D No. 1023** – Wt., 1.3 lbs.  
Reach: 3<sup>3</sup>/<sub>8</sub>" max.  
Spread: 4<sup>3</sup>/<sub>4</sub>" max.  
Screw Size: 3<sup>1</sup>/<sub>8</sub>"-24 x 4<sup>7</sup>/<sub>8</sub>" lg.

### 5 ton capacity, reversible jaw puller

#### 2 Jaw\*

- E No. 1024** – Wt., 1.8 lbs.  
Reach: 3<sup>1</sup>/<sub>4</sub>" max.  
Spread: 6" max.  
Screw Size: 9<sup>1</sup>/<sub>16</sub>"-20 x 6<sup>15</sup>/<sub>16</sub>" lg.

#### 2/3 Jaw\*

- F No. 1026** – Wt., 2.8 lbs.  
Reach: 3<sup>1</sup>/<sub>4</sub>" max.  
Spread: 7" max.  
Screw Size: 9<sup>1</sup>/<sub>16</sub>"-20 x 6<sup>15</sup>/<sub>16</sub>" lg.

### 5 ton capacity, reversible jaw puller


#### 2 Jaw\*

- G No. 1025** – Wt., 2 lbs.  
Reach: 5<sup>1</sup>/<sub>2</sub>" max.  
Spread: 6" max.  
Screw Size: 9<sup>1</sup>/<sub>16</sub>"-20 x 6<sup>15</sup>/<sub>16</sub>" lg.

#### 2/3 Jaw\*

- H No. 1027** – Wt., 3.3 lbs.  
Reach: 5<sup>1</sup>/<sub>2</sub>" max.  
Spread: 7" max.  
Screw Size: 9<sup>1</sup>/<sub>16</sub>"-20 x 6<sup>15</sup>/<sub>16</sub>" lg.


\* With double-end, reversible jaws.

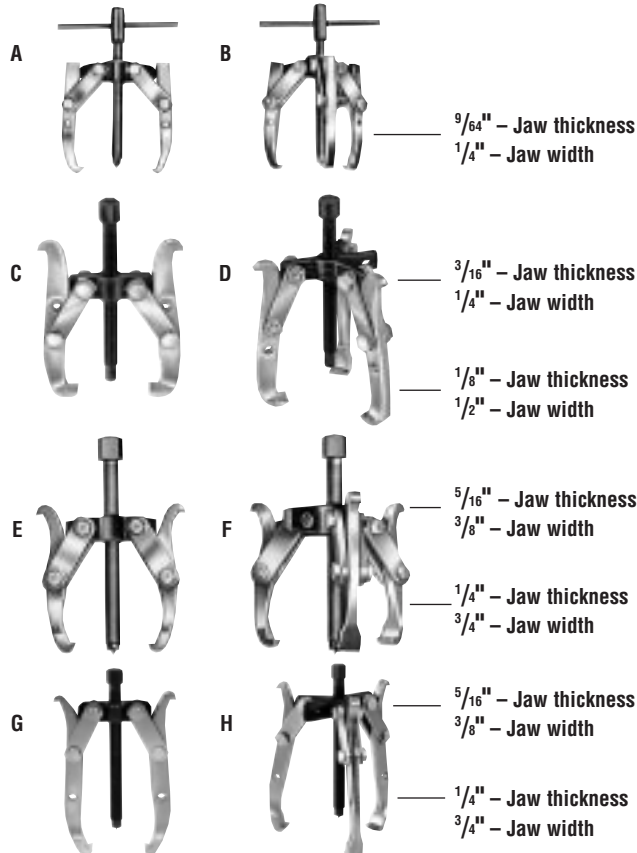

For puller piece part identification, order Power Team parts catalog PC97


## 7 ton capacity, reversible jaw puller

- |   |  |
|---|--|
| <p><b>2 Jaw*</b></p> <p><b>J</b> <b>No. 1035</b> – Wt., 4.5 lbs.<br/>Reach: 5" max.<br/>Spread: 9" max.<br/>Screw Size: <math>1\frac{1}{16}</math>"–18 x 9" lg.</p> | <p><b>2/3 Jaw*</b></p> <p><b>K</b> <b>No. 1037</b> – Wt., 6.3 lbs.<br/>Reach: 5" max.<br/>Spread: <math>10\frac{1}{2}</math>" max.<br/>Screw Size: <math>1\frac{1}{16}</math>"–18 x 9" lg.</p> |
|---|--|

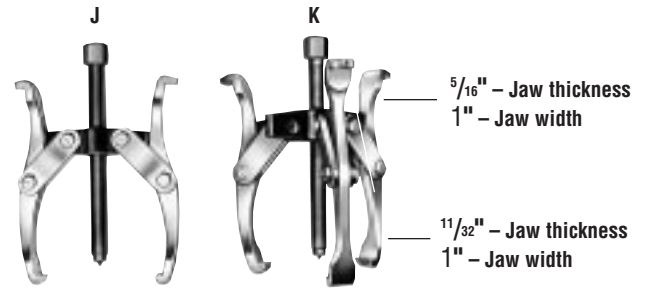


## 7 ton capacity, long jaw puller

- |  |   |
|--|---|
| <p><b>2 Jaw</b></p> <p><b>L</b> <b>No. 1036</b> – Wt., 5 lbs.<br/>Reach: <math>8\frac{3}{4}</math>" max.<br/>Spread: <math>9\frac{1}{2}</math>" max.<br/>Screw Size: <math>1\frac{1}{16}</math>"–18 x 9" lg.</p> | <p><b>2/3 Jaw</b></p> <p><b>M</b> <b>No. 1038</b> – Wt., 7.3 lbs.<br/>Reach: <math>8\frac{3}{4}</math>" max.<br/>Spread: 11" max.<br/>Screw Size: <math>1\frac{1}{16}</math>"–18 x 9" lg.</p> |
|--|---|

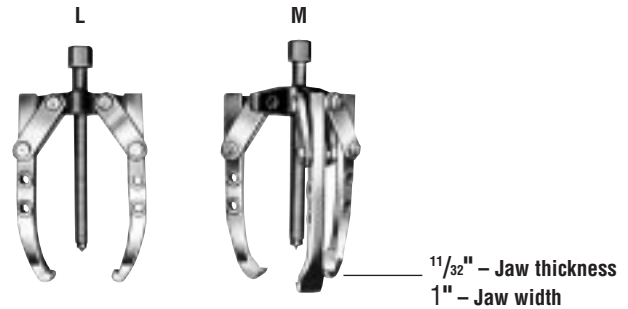


## 13 ton capacity, standard and long jaw pullers

- |   |   |
|---|---|
| <p><b>Std. 2 Jaw</b></p> <p><b>N</b> <b>No. 1039</b> – Wt., 10.5 lbs.<br/>Reach: 11" max.<br/>Spread: <math>12\frac{1}{2}</math>" max.<br/>Screw Size: <math>1\frac{3}{16}</math>"–16 x 12" lg.</p> | <p><b>Long 2 Jaw</b></p> <p><b>N</b> <b>No. 1040</b> – Wt., 13 lbs.<br/>Reach: <math>15\frac{1}{4}</math>" max.<br/>Spread: <math>15\frac{1}{2}</math>" max.<br/>Screw Size: <math>1\frac{3}{16}</math>"–16 x 12" lg.</p> |
| <p><b>Std. 2/3 Jaw</b></p> <p><b>O</b> <b>No. 1041</b> – Wt., 14.8 lbs.<br/>Reach: 11" max.<br/>Spread: 14" max.<br/>Screw Size: <math>1\frac{3}{16}</math>"–16 x 12" lg.</p>                       | <p><b>Long 2/3 Jaw</b></p> <p><b>O</b> <b>No. 1042</b> – Wt., 26 lbs.<br/>Reach: <math>15\frac{1}{4}</math>" max.<br/>Spread: 17" max.<br/>Screw Size: <math>1\frac{3}{16}</math>"–16 x 12" lg.</p>                       |

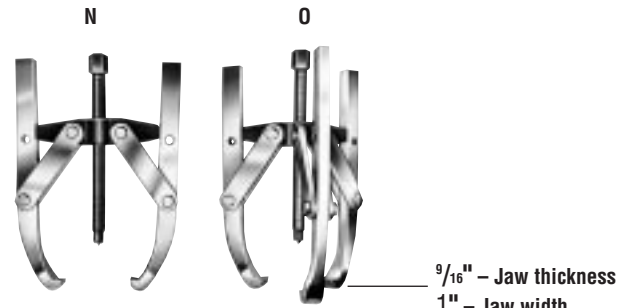

## 17 1/2 ton capacity, standard and long jaw pullers

- |  |  |
|--|--|
| <p><b>Std. 2 Jaw</b></p> <p><b>P</b> <b>No. 1043</b> – Wt., 23 lbs.<br/>Reach: <math>14\frac{1}{2}</math>" max.<br/>Spread: 14" max.<br/>Screw Size: 1"–14 x <math>13\frac{1}{2}</math>" lg.</p> | <p><b>Long 2 Jaw</b></p> <p><b>P</b> <b>No. 1044</b> – Wt., 26 lbs.<br/>Reach: <math>18\frac{3}{4}</math>" max.<br/>Spread: 16" max.<br/>Screw Size: 1"–14 x <math>13\frac{1}{2}</math>" lg.</p> |
| <p><b>Std. 3 Jaw</b></p> <p><b>Q</b> <b>No. 1045</b> – Wt., 33 lbs.<br/>Reach: <math>14\frac{1}{2}</math>" max.<br/>Spread: 14" max.<br/>Screw Size: 1"–14 x <math>13\frac{1}{2}</math>" lg.</p> | <p><b>Long 3 Jaw</b></p> <p><b>Q</b> <b>No. 1046</b> – Wt., 37 lbs.<br/>Reach: <math>18\frac{3}{4}</math>" max.<br/>Spread: 16" max.<br/>Screw Size: 1"–14 x <math>13\frac{1}{2}</math>" lg.</p> |

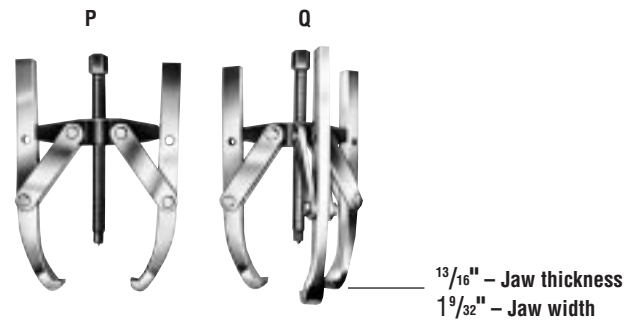

## 25 ton capacity, standard and long jaw pullers

- |  |  |
|--|--|
| <p><b>Std. 2 Jaw</b></p> <p><b>R</b> <b>No. 1047</b> – Wt., 37.5 lbs.<br/>Reach: <math>15\frac{1}{2}</math>" max.<br/>Spread: 16" max.<br/>Screw Size: <math>1\frac{1}{4}</math>"–12 x <math>16\frac{5}{8}</math>" lg.</p> | <p><b>Long 2 Jaw</b></p> <p><b>R</b> <b>No. 1048</b> – Wt., 42.8 lbs.<br/>Reach: <math>22\frac{1}{4}</math>" max.<br/>Spread: 20" max.<br/>Screw Size: <math>1\frac{1}{4}</math>"–12 x <math>16\frac{5}{8}</math>" lg.</p> |
| <p><b>Std. 3 Jaw</b></p> <p><b>S</b> <b>No. 1049</b> – Wt., 54 lbs.<br/>Reach: <math>15\frac{1}{2}</math>" max.<br/>Spread: 16" max.<br/>Screw Size: <math>1\frac{1}{4}</math>"–12 x <math>16\frac{5}{8}</math>" lg.</p>   | <p><b>Long 3 Jaw</b></p> <p><b>S</b> <b>No. 1050</b> – Wt., 60 lbs.<br/>Reach: <math>22\frac{1}{4}</math>" max.<br/>Spread: 22" max.<br/>Screw Size: <math>1\frac{1}{4}</math>"–12 x <math>16\frac{5}{8}</math>" lg.</p>   |

