

# Toe Jacks


5.5, 11 & 27.5 Ton Capacity

Get under equipment with only 1 1/16" of ground clearance.



JACKS

- With lifting points on the toe and on the top, these extremely rugged jacks are ideal for machine lifting, rigging, lift truck service and much more.
- Choose from 5.5-ton, 11-ton, and now, an amazing 27.5-ton lifting capacity.
- All jacks operate both vertically and horizontally.
- All jacks meet ASME B30.1 standards and carry the Power Team Marathon Lifetime Warranty.
- Base, toe and pumping assembly swivel independently, allowing the jack to work in confined areas.

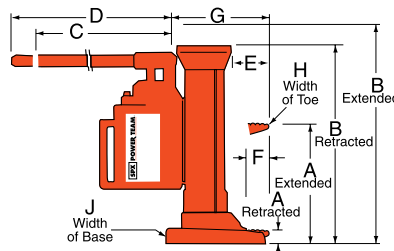

## ORDERING INFORMATION

See current price list for shipping weights.

Cap. Tons	Max Lift Stroke	Order Number	Ret. (in.)	A Ext. (in.)	Ret. (in.)	B Ext. (in.)	Strokes to extend piston 1 in.	C (in.)	D (in.)	E (in.)	F (in.)	G (in.)	H (in.)	J (in.)	Handle Effort at Max load (lbs.)	Carry Handle	Product Wt. (lbs.)
5 1/2	8 1/4	J58T	1 1/16	9 3/8	14 3/4	23	8	14 1/2	17 3/4	2 13/16	2 1/16	6 15/16	1 5/8	5 1/8	83.9	Yes	43
11	9 1/4	J109T	1 1/16	10 3/8	16 1/2	25 3/4	13	14 1/2	17 3/4	3	2 3/16	7 7/32	2 1/2	6 3/4	88	Yes	64
27 1/2	9 9/16	J259T	2 1/8	11 3/8	19 3/8	29 1/16	21	8 1/4	29 3/4	5 3/4	4	10 1/2	3 1/2	10 5/8	88	Yes	203


# Economy Toe Jacks

## 2, 5 & 10 Ton Capacity

Just the power you need at a price you can afford.



- These bottle jack-style toe jacks are loaded with many of the same features as our standard bottle jacks, but the toe-lift feature and swiveling pump handle socket make them ideal for machinery lifting and positioning.
- An internal pressure relief provides added safety by limiting the jack's lifting capability to the capacity of the toe.
- Spring return is an added feature on the larger jacks.
- All jacks meet ASME B30.1 standards and carry the Power Team Marathon Lifetime Warranty.
- Swiveling pump handle assembly available on the 5- and 10-ton models. The swiveling jack assembly allows you to access and pump the unit from numerous positions.



### ORDERING INFORMATION

See current price list for shipping weights.

Cap. Tons	Max Lift Stroke	Order Number	A		B		Strokes to extend piston 1 in.	C (in.)	D (in.)	E (in.)	F (in.)	Handle Effort at Max load (lbs.)	Carry Handle	Product Wt. (lbs.)
			Retract. (in.)	Extend. (in.)	Retract. (in.)	Extend. (in.)								
2	4 <sup>7</sup> / <sub>8</sub>	J24T	<sup>5</sup> / <sub>8</sub>	5 <sup>1</sup> / <sub>2</sub>	9 <sup>1</sup> / <sub>4</sub>	14	14	1 <sup>7</sup> / <sub>8</sub>	7 <sup>1</sup> / <sub>8</sub>	2	4 <sup>15</sup> / <sub>16</sub>	42	Yes	18.3
5	4 <sup>7</sup> / <sub>8</sub>	J55T	1	5 <sup>7</sup> / <sub>8</sub>	11 <sup>1</sup> / <sub>2</sub>	16 <sup>3</sup> / <sub>8</sub>	22	1 <sup>7</sup> / <sub>8</sub>	10 <sup>1</sup> / <sub>8</sub>	3	7 <sup>1</sup> / <sub>4</sub>	60	Yes	53
10	5 <sup>7</sup> / <sub>8</sub>	J106T	1 <sup>1</sup> / <sub>4</sub>	7 <sup>1</sup> / <sub>8</sub>	12 <sup>7</sup> / <sub>8</sub>	18 <sup>3</sup> / <sub>4</sub>	31	2 <sup>1</sup> / <sub>2</sub>	11 <sup>1</sup> / <sub>2</sub>	3 <sup>15</sup> / <sub>16</sub>	9 <sup>1</sup> / <sub>2</sub>	73	Yes	83.8