Pover Stak



Presto

OWE

The PowerStak Difference-

The Presto PowerStak™ is a high performance, fully powered stacker that offers significant performance advantages over manual stackers without a significant price premium.

The PowerStak provides instant flexibility and versatility. Whether used as a dedicated stacker, or as a combination stacker/work positioner, or as a transporter, it will provide a significant improvement in worker productivity. Its abundance of ergonomic features make it the safest, easiest to operate powered stacker available. Its sleek, stylish design, low overall weight, and quiet operation allow the PowerStak to fit nicely into a wide variety of work environments including:

- Warehouses
- Loading docks
- Light assembly work cells
- · Retail sales floors

Six PowerStak models are available to satisfy just about any requirement including servicing racks up to 12 feet high. Fork Over models can be used with open bottom pallets or skids and adjustable straddle units are available for use with any pallet style, even closed bottom.



Ergonomic handle with comfort group controls and switch redundancy for left or right hand operation



Auto reversing "belly bump" switch protects against operator accidents while working in tight quarters



Power Stak

Presio

Smooth polyurethane drive wheel is fully shrouded to protect operators' feet




Narrow mast and offset design provide workers a clear view with no "blind spots"



Adjustable fork carriage allows forks to be quickly repositioned to best accommodate loads (straddle only)

Fork Over Design


Model	PPS2200-62NF0-27	PPS2200-62NF0-21	
Lift Height	62"	62"	
Capacity	2,200 lbs.	2,200 lbs.	
Load Center	24"	24"	
Fork Length	42"	42"	
Individual Fork Width	5.9"	5.9"	
Max. Distance Between Forks	15"	9"	
Max. Overall Width of Forks	27"	21"	
Overall Height	78"	78"	
Overall Width	32"	32"	
Weight (without load)	900 lbs.	900 lbs.	
Lifting Speed (without load)	4.8" / sec.	4.8" / sec.	
Battery (2)	12 volt 70 amp hr	12 volt 70 amp hr	

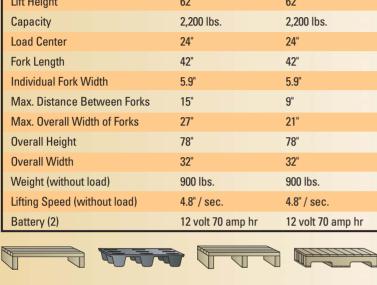



Straddle Design

Model	PPS2200-62NAS	PPS2200-101AS	PPS2200-125AS	PPS2200-150AS
Lift Height	62"	101"	125"	150"
Capacity	2,200 lbs.	2,200 lbs.	2,200 lbs.	2,200 lbs.
Load Center	24"	24"	24"	24"
Forks (adjustable welded)	42"	42"	42"	42"
Individual Fork Width	5.9"	5.9"	5.9"	5.9"
Straddle I.D. (adjustable)	38" — 50"	38" — 50"	38" — 50"	38" — 50"
Max. Overall Width (straddle legs)	46" — 57.9"	46" — 57.9"	46" — 57.9"	46" — 57.9"
Overall Height	78"	72"	82"	99"
Weight (without load)	1,050 lbs.	1,390 lbs.	1,445 lbs.	1,610 lbs.
Lifting Speed (without load)	4.8" / sec.	4.8" / sec.	4.8" / sec.	4.8" / sec.
Battery (2)	12 volt 70 amp hr	12 volt 70 amp hr	12 volt 70 amp hr	12 volt 120 amp hr



Straddle legs feature simple user adjustability

Options


PowerStak units are available with these standard options. Other options may be available. Consult factory for details.

- Load backrests
- Rubber drive wheel
- Deep cycle battery
- Forged forks

PowerStak Counterbalance Stackers

Presto Counterbalance Stackers are ideal for die handling or machine feeding applications where straddle legs could get in the way. They can also be used for servicing rack or loading and unloading trucks. Unit comes standard with manual adjustable tilt mast.

Model	PPS1100-CB-62
Lift Height	62"
Capacity	1,100 lbs.
Load Center	15"
Fork Length	30"
Individual Fork Width	3"
Overall Height	82"
Overall Width	32"
Lifting Speed (without load)	3.2" / sec.
Weight (without load)	1,499 lbs.
Battery (2)	12 volt 120 amp hr







Other Presto Stackers



Lift Stik™



Counterweight Stackers



Manual Stackers



Pallet Stackers



Straddle Stackers



Specialty Stackers

The PowerStak Warranty

Presto Lifts warrants the PowerStak against defects in the welded structural frame and AC motors on lifts equipped with an AC power unit from faulty material and workmanship for a period of two (2) years from the date of invoice. Presto Lifts warrants the PowerStak against defects on the mast, fork carriage, chains, pumps, DC motors, controllers, switches, cylinders, batteries, battery chargers and wiring harnesses from faulty material and workmanship for a period of one (1) year from the date of invoice. Visit our website for complete warranty information.





