

**WE TAKE QUALITY
PERSONALLY.**



TABLE OF CONTENTS

Pipe Cutters	Pages 4–9
Manual & Ratchet Snap Cutters	Steel Pipe Cutters
Soil Pipe Coupling Torque Wrenches	Hinged Pipe Cutters
Hydraulic Pipe Cutters	Pipe Cleaner
Hydraulic Pump Fluid	The PipeMaster
Replacement Cutter Chains	
Internal Cast Iron Pipe Cutter	
Grooving & Fabrication	Pages 10–11
Manual Roll Groover	Hydraulic Roll Grooving Accessories
Portable Roll Groovers	Orbital Pipe Cutting Machine
Hydraulic Roll Grooving Machines	
12R Style Replacement Dies and Die Heads	Page 12
Manual Ratchet Threader Sets	12R Style Dies – NPT, BSPT,
Mini Power Drives	12R Style Drop Head with Dies
Hand Oilier	– NPT, BSPT
Pipe Threading Machines	Pages 13–15
Sidekick III Pipe Threader	Universal Replacement Dies
Power Threading Machines	
Threading Accessories & Cutting Fluid	Pages 16–21
Threader Carts	ThreadMaster Threading Fluid
Nipple Attachments	Threaders
Sidekick III Threader Stand	
Hydrostatic Test Pumps	Pages 22–26
Manual Operated	Pneumatic Operated
Gas Operated	Fire Hose Testers
Electric Operated	Vacuum Test Assembly
Trash Pumps	Page 27
2" and 3" Trash Pumps	Mudsucker Pumps
Tube Tools	Pages 28–31
Auto-C Cutters	Inner & Outer Reamer
Close Quarters Cutter	Deburring Tool
Tube Brushes	Hammerhead Flaring Tool
Ratch Cuts	Rerounding Tools and Kit
Tubing Cutters	
Replacement Cutter Wheels	Page 32
Replacement Cutter Wheels	
Glass Tube Cutters	Page 33
Cutters for Glass Tubing	

Plastic Pipe Tools	Pages 34–39
Professional & Economy Snippers	Pipe Hog® and Kit
Blade Sharpener	Pipe Fitting Savers and Kit
Hand Saws	Internal Cutters
Cable Saws	Chamfering/Depth Gauge Tool
Hand and Powered Bevelers	Guillotine Pipe Cutters
Pipe Working Tools	Pages 40–41
Tripod Vise Stand	Pipe Puller
Folding Tripod Pipe Supports	Pipe Dolly
Yoke Vises	Bench Vises
Floor Pipe Vises	
Shut Off Tools	Page 42
For Soft Copper Water Lines	For Plastic Water and Gas Lines
Pipe Freezing Kit	Page 43
Pipe Freezing Kit	Replacement Polar Spray
Drilling and Tapping Tools	Pages 44–47
Hot Tap System & Accessories	Hole Cutter System and Shells
Drill Taps	Earthworm Hydro-Drill
Tapping Fluid	Pipe Slices & Accessories
Portable Hole Cutter Systems	Mini Pipe Slice
Valve Exercisers	Pages 48–49
ValveMaster	Rising Stem & Hand Wheel Adapters
Portable Valve Exercisers	Telescoping Valve Keys
Hydrant Nut	
Wrenches, Pliers & Fastening Tools	Pages 50–53
Pipe Wrenches	Basin Wrench
GripMaster	Strap Wrenches
Spud Wrench	Valve Wheel Wrenches
Double-Up Wrenches	Hydrant Wrench
Heavy Duty Deep Sockets	Chain Wrench
Coupling Torque Wrenches	
No-Hub® Coupling Wrenches	
Crimping Tools	Pages 54–55
PEX Crimping Tools	
Miscellaneous Tools	Page 56
O.D. Tapes	Mantis Replacement Blades
Utility Knives	
Distributor Marketing Aids	Page 57

Product Index	Pages 59–63
----------------------	--------------------

PIPE CUTTERS



590 AND 591 MANUAL PIPE CUTTER



Wheeler #	Service (Std) WT Soil Pipe	XH Soil Pipe	No-Hub®	Tile / Clay	Shipping Weight
590-6	1 1/2"-6" (38mm-150mm)	1 1/2"-5" (38mm-125mm)	1 1/2"-6" (38mm-150mm)	4"-6" (100mm-150mm)	23 lbs. (10.5kg)
590-8	1 1/2"-6" (38mm-150mm)	1 1/2"-5" (38mm-125mm)	1 1/2"-6" (38mm-150mm)	4"-8" (100mm-200mm)	25 lbs. (11.5kg)
590-10	1 1/2"-6" (38mm-150mm)	1 1/2"-5" (38mm-125mm)	1 1/2"-6" (38mm-150mm)	4"-10" (100mm-250mm)	28 lbs. (13kg)
590-12	1 1/2"-6" (38mm-150mm)	1 1/2"-5" (38mm-125mm)	1 1/2"-6" (38mm-150mm)	4"-12" (100mm-300mm)	28 lbs. (12.7kg)
590-15	1 1/2"-6" (38mm-150mm)	1 1/2"-5" (38mm-125mm)	1 1/2"-6" (38mm-150mm)	4"-15" (100mm-375mm)	29 lbs. (13kg)
591-6	1 1/2"-6" (38mm-150mm)	1 1/2"-5" (38mm-125mm)	1 1/2"-6" (38mm-150mm)	4"-6" (100mm-150mm)	24 lbs. (11kg)
591-8	1 1/2"-6" (38mm-150mm)	1 1/2"-5" (38mm-125mm)	1 1/2"-6" (38mm-150mm)	4"-8" (100mm-200mm)	25 lbs. (11.5kg)

38 Replacement Adjustment Screw Assembly

490 AND 491 RATCHET PIPE CUTTER



Wheeler #	Service (Std) WT Soil Pipe	XH Soil Pipe	No-Hub®	Tile / Clay	Shipping Weight
490-6	1 1/2"-6" (38mm-150mm)	1 1/2"-5" (38mm-125mm)	1 1/2"-6" (38mm-150mm)	4"-6" (100mm-150mm)	18 lbs. (8.5kg)
490-8	1 1/2"-6" (38mm-150mm)	1 1/2"-5" (38mm-125mm)	1 1/2"-8" (38mm-200mm)	4"-8" (100mm-200mm)	19 lbs. (8.6kg)
490-10	1 1/2"-6" (38mm-150mm)	1 1/2"-5" (38mm-125mm)	1 1/2"-8" (38mm-200mm)	4"-10" (100mm-250mm)	20 lbs. (9.5kg)
490-12	1 1/2"-6" (38mm-150mm)	1 1/2"-5" (38mm-125mm)	1 1/2"-8" (38mm-200mm)	4"-12" (100mm-300mm)	22 lbs. (10kg)
490-15	1 1/2"-6" (38mm-150mm)	1 1/2"-5" (38mm-125mm)	1 1/2"-8" (38mm-200mm)	4"-15" (100mm-375mm)	23 lbs. (10.5kg)
491-6	1 1/2"-6" (38mm-150mm)	1 1/2"-5" (38mm-125mm)	1 1/2"-6" (38mm-150mm)	4"-6" (100mm-150mm)	18 lbs. (8.5kg)
491-8	1 1/2"-6" (38mm-150mm)	1 1/2"-5" (38mm-125mm)	1 1/2"-8" (38mm-200mm)	4"-8" (100mm-200mm)	19 lbs. (9kg)

6519 1/2" Square Male/Female Drive Ratchet..... 2 lbs. (0.9kg)
 700669 Replacement Drive Screw Assembly
 275556 Replacement Pin for 700669

3990 XH RATCHET PIPE CUTTER



Wheeler #	Service (Std) WT Soil Pipe	XH Soil Pipe	Tile / Clay	Cast Iron Water Class 22	Shipping Weight
3990-6	2"-6" (50mm-150mm)	2"-6" (50mm-150mm)	2"-6" (50mm-150mm)	2"-6" (50mm-150mm)	21 lbs. (9.5kg)
3990-8	2"-8" (50mm-200mm)	2"-8" (50mm-200mm)	4"-8" (100mm-200mm)	2"-6" (50mm-150mm)	23 lbs. (10.5kg)

6520 1/2" Square Female Drive Ratchet – U.S.A. Made 2 lbs. (0.9kg)
 700919 Replacement Drive Screw Assembly

SOIL PIPE COUPLING TORQUE WRENCH

This durable "T-Handle" type torque tool with a contoured comfort-fit handle features a removable socket and a unique locking collar, which allows the tool to be used as an untorqued snug-up or back-off, as well as a conventional torque tool. With the locking collar retracted, the tool torques to the right (tightening), while ratcheting to the left. When proper torque value has been achieved, the mechanism slips internally and over-tightening is impossible.

1977 T-Torque for tightening 5/16" coupling nuts to 60 in. lbs..... Weight 1 lb. (0.5kg)
 1980 T-Torque for tightening 5/16" coupling nuts to 80 in. lbs..... Weight 1 lb. (0.5kg)
 1981 T-Torque for tightening 3/8" coupling nuts to 80 in. lbs..... Weight 1 lb. (0.5kg)
 1982 T-Torque for tightening 5/16" & 3/8" coupling nuts to 80 in. lbs..... Weight 1 lb. (0.5kg)

275410 5/16" Replacement Socket
 275818 3/8" Replacement Socket

More Torque Wrenches available... see page 52.



Close-up view of "captured screw"



Replaceable Socket

WHEELER-REX HYDRAULIC PIPE CUTTERS

WHEELER-REX Hydraulic Cutters are the solution to cutting larger diameter Cast Iron, Tile and Concrete Pipe. Like the hand operated "snap" cutters, hydraulic cutters are not rotated around pipe. Their remotely operated hydraulic pumps provide the required power. A 2"-3" minimum clearance is all that is needed to wrap cutter chain around pipe. They come complete with pump, hose and case.



2990 HYDRAULIC PIPE CUTTER



Wheeler #	Service (Std) WT Soil Pipe	XH Soil Pipe	Tile / Clay	Cast Iron Water Class 22	Cast Iron Water Class 26	Shipping Weight
2990-6	2"-6" (50mm-150mm)	2"-6" (50mm-150mm)	2"-6" (50mm-150mm)	2"-6" (50mm-150mm)	NA	85 lbs. (39kg)
2990-8	2"-8" (50mm-200mm)	2"-8" (50mm-200mm)	2"-8" (50mm-200mm)	2"-6" (50mm-150mm)	NA	87 lbs. (40kg)
2990-10	2"-10" (50mm-250mm)	2"-8" (50mm-200mm)	2"-10" (50mm-250mm)	2"-6" (50mm-150mm)	NA	89 lbs. (41kg)
2990-12	2"-10" (50mm-250mm)	2"-8" (50mm-200mm)	2"-12" (50mm-300mm)	2"-6" (50mm-150mm)	NA	92 lbs. (42kg)
2990-15	2"-10" (50mm-250mm)	2"-8" (50mm-200mm)	2"-15" (50mm-375mm)	2"-6" (50mm-150mm)	NA	94 lbs. (43kg)

1630 Replacement Hydraulic Pump 22 lbs. (48.5kg)



3890 HYDRAULIC PIPE CUTTER



Wheeler #	Service (Std) WT Soil Pipe	XH Soil Pipe	Tile and Concrete	Cast Iron Water Class 22	Cast Iron Water Class 26	Shipping Weight
3890-12	4"-12" (100mm-300mm)	4"-12" (100mm-300mm)	4"-12" (100mm-300mm)	4"-12" (100mm-300mm)	4"-10" (100mm-250mm)	152 lbs. (69kg)
3890-15	4"-15" (100mm-375mm)	4"-15" (100mm-375mm)	4"-15" (100mm-375mm)	4"-12" (100mm-300mm)	4"-10" (100mm-250mm)	163 lbs. (74kg)
3890-18	4"-18" (100mm-450mm)	4"-18" (100mm-450mm)	4"-18" (100mm-450mm)	4"-12" (100mm-300mm)	4"-10" (100mm-250mm)	170 lbs. (77kg)
3890-24	4"-18" (100mm-450mm)	4"-18" (100mm-450mm)	4"-24" (100mm-600mm)	4"-12" (100mm-300mm)	4"-10" (100mm-250mm)	178 lbs. (88kg)

1830 Replacement Hydraulic Pump 22 lbs. (48.5kg)



5590 HYDRAULIC PIPE CUTTER

Wheeler #	Service (Std) WT Soil Pipe	XH Soil Pipe	Tile and Concrete	Cast Iron Water Class 22	Cast Iron Water Class 26	Shipping Weight
5590-18	6"-18" (150mm-450mm)	6"-18" (150mm-450mm)	6"-18" (150mm-450mm)	6"-18" (150mm-450mm)	6"-18" (150mm-450mm)	200 lbs. (91kg)
5590-20	6"-18" (150mm-450mm)	6"-18" (150mm-450mm)	6"-20" (150mm-500mm)	6"-20" (150mm-500mm)	6"-18" (150mm-450mm)	213 lbs. (97kg)
5590-24	6"-18" (150mm-450mm)	6"-18" (150mm-450mm)	6"-24" (150mm-600mm)	6"-20" (150mm-500mm)	6"-18" (150mm-450mm)	230 lbs. (105kg)
5590-36	6"-18" (150mm-450mm)	6"-18" (150mm-450mm)	6"-36" (150mm-900mm)	6"-20" (150mm-500mm)	6"-18" (150mm-450mm)	269 lbs. (122kg)

1930 Replacement Hydraulic Pump 22 lbs. (48.5kg)



HYDRAULIC PUMP FLUID

(WHEELER-REX Hydraulic Cutter guarantees valid only when Hydroyl fluid is used.)

3801 1 Qt 2.5 lbs. (1kg)

3804 1 Gal. 8 lbs. (4kg)

Gallons are available in cases of six.

PIPE CUTTER CHAINS

490 RATCHET, 590 MANUAL & 1790 JR. HYDRAULIC

Part No.		Length	No. of pins	Weight
522	Chain for 6" Pipe	26 1/4"	21	5 lbs. (2.3kg)
532	Chain for 6" Pipe with rollers for No-Hub®	26 1/4"	21	5 lbs. (2.3kg)
528	Chain for 8" Pipe	36"	29	6.5 lbs. (2.9kg)
533	Chain for 8" Pipe with rollers for No-Hub®	36"	29	6.5 lbs. (2.9kg)
5210	Chain for 10" Pipe	43 3/4"	35	8 lbs. (3.6kg)
5212	Chain for 12" Pipe	51"	41	10 lbs. (4.5kg)
5215	Chain for 15" Pipe	58 1/2"	47	11 lbs. (5kg)
FOR CONVERTING YOUR PRESENT CHAIN TO CUT LARGER SIZES				
5256	6" to 8", 8" to 10", 10" to 12", 12" to 15"	10"	8	2 lbs. (0.9kg)
5258	6" to 10", 8" to 12", 10" to 15"	17 1/2"	14	3.5 lbs. (1.6kg)
52510	6" to 12", 8" to 15"	25"	20	8 lbs. (3.6kg)
52512	6" to 15"	32 1/2"	26	6 lbs. (2.7kg)
519	Kit to convert 590 Cutter to 591 No-Hub® Cutter or 490 Cutter to 491 No-Hub® Cutter			

3990 RATCHET PIPE CUTTER

Part No.		Length	No. of Pins	Weight
700987	Chain for 6" Pipe	26"	21	7 lbs. (3kg)
701077	Chain for 8" Pipe	36"	29	8.5 lbs. (3.8kg)

2990 HYDRAULIC CUTTER

Part No.		Length	No. of pins	Weight
1926	Chain for 6" Pipe	26 1/4"	21	7 lbs. (3kg)
1924	Chain for 8" Pipe (replaces 2924)	36 1/4"	29	10 lbs. (4.5kg)
192410	Chain for 10" Pipe (replaces 292410)	46 1/4"	37	12 lbs. (5.5kg)
192412	Chain for 12" Pipe (replaces 292412)	53 1/4"	43	14 lbs. (6.5kg)
192415	Chain for 15" Pipe (replaces 292415)	61 1/4"	49	16 lbs. (7kg)
FOR CONVERTING YOUR PRESENT CHAIN TO CUT LARGER SIZES (Note – Old and new style chain extensions NOT interchangeable)				
19010	8" Cutter to 10"	10"	8	2.5 lbs. (1kg)
19012	8" Cutter to 12"	17 1/2"	14	4.5 lbs. (2kg)
19015	8" Cutter to 15"	25"	20	6.5 lbs (2.9kg)
2905	Adjusting link for 2990 Chain			

3890 HEAVY DUTY HYDRAULIC CUTTER

Part No.		Length	No. of pins	Weight
3824	Chain for 12" Pipe	50 3/4"	29	25 lbs. (11kg)
382415	Chain for 15" Pipe	63"	37	32 lbs. (14.5kg)
382418	Chain for 18" Pipe	76 1/2"	43	37 lbs. (16.8kg)
382424	Chain for 24" Pipe	97 1/2"	55	47 lbs. (21.4kg)
FOR CONVERTING YOUR PRESENT CHAIN TO CUT LARGER SIZES				
382515	12" Cutter to 15"	14"	8	7 lbs. (3kg)
382518	12" Cutter to 18"	24 1/2"	14	11 lbs. (5kg)
382520	12" Cutter to 20"	35"	20	11 lbs. (5kg)
382524	12" Cutter to 24"	46 1/2"	26	22 lbs. (10kg)

5590 SUPER HYDRAULIC CUTTER

Part No.		Length	No. of pins	Weight
5524	Chain for 18" Pipe	72 1/2"	29	71 lbs. (32kg)
552420	Chain for 20" Pipe	82 1/2"	33	83 lbs. (37.8kg)
552424	Chain for 24" Pipe	97"	39	98 lbs. (44.5kg)
552436	Chain for 36" Pipe	142"	57	142 lbs. (64.5kg)
FOR CONVERTING YOUR PRESENT CHAIN TO CUT LARGER SIZES				
552520	18" Cutter to 20"	10"	4	10 lbs. (4.5kg)
552524	18" Cutter to 24"	25"	10	25 lbs. (11.4kg)
552536	18" Cutter to 36"	70"	28	64 lbs. (29.1kg)

NOTE: Hydraulic cutter chain parts: individual pins, links and wheels are only available with factory installation. Hydraulic cutter chain extensions are available only through authorized service stations unless installed by the factory.



INTERNAL CAST IRON PIPE CUTTER (CAPITOL STYLE CUTTER)

Cuts Cast Iron from the inside out!!

Designed to eliminate the difficulty plumbers have in setting toilet bowls, urinals and similar fixtures due to the shortness of the closet horn. Make cuts where nothing else can!

32900	3" Cast Iron.....	10 lbs. (4.5kg)
42900	4" Cast Iron.....	10.5 lbs. (4.7kg)

Replacement Cutter Wheels:

700201	Cutter Wheel for CI for 32900/42900
276097	Cutter Wheel Pin



STEEL PIPE CUTTERS

Two models designed for fast, easy cutting of steel pipes. Both models come with an extra long shank which protects adjustment threads and an extra large handle for quick, easy adjustment.

2690	For 1/8"-2" steel pipe (3.17mm-50.8mm)	6 lbs. (2.8kg)
8001	Cutter Wheel for steel	
8082	Cutter Wheel for stainless steel	
4690	For 2"-4" steel pipe (50.8mm-101.6mm)	18 lbs. (8kg)
8004	Replacement Cutter Wheel	



HINGED PIPE CUTTER

Four-wheel cutter, featuring a unique guide bar design that ensures both smooth operation and accurate precise pipe cutting. Needs only 90° to 110° handle swing, and only 4 inch clearance. Universal cutter wheels are ideal for cutting most metals and are interchangeable with many other makes of hinged pipe cutters.

5090	1/2"-2" pipe capacity (12.7mm-50.8mm)	6 lbs. (2.7kg)
95240	2"-4" pipe capacity (50.8mm-101.6mm)	18 lbs. (8.2kg)
95460	4"-6" pipe capacity (101.6mm-152.4mm)	21 lbs. (9.5kg)
95680	6"-8" pipe capacity (152.4mm-203.2mm)	27 lbs. (12kg)
95121	8"-12" pipe capacity (203.2mm-304.8mm)	35 lbs. (16kg)

Replacement Cutter Wheels:

8039	for 5090 for steel
8050	for 95041, 95240 for steel
8052	for 95061, 95460 for steel
8054	for 95081, 95680, 95121 for steel
8051	for 95041, 95240 for CI/DI
8053	for 95061, 95081, 95460, 95680, 95121 for CI/DI
8076	for 95061, 95081, 95460, 95680, 95121 / universal wheel

PIPE CLEANER (Descaler)

A versatile scraper for removing mud and scale from pipe surfaces. Makes for faster cutting and better repairs and joints. Belt material is light, strong and non-corroding. Angled blades promote self-cleaning. Belt is replaceable, longer length reduces back strain.

1300	For 3-12" diameter, 45" OAL.....	4 lbs. (2kg)
1301	Replacement Belt, 45"	3 lbs. (1.5kg)
1350	For 12-36" diameter, 72" OAL.....	5 lbs. (2.5kg)
1351	Replacement Belt, 72"	4 lbs. (2kg)





PIPEMASTER

General Information:

Unit consists of a cutting head with internal gears which operate the drive wheels and blade shaft. Cutting blades (except for No. 4616) must be cooled with water during cutting and are fully enclosed for safety. The cutter is held onto the pipe by a wide roller chain which is tensioned with a threaded take-up mechanism. A chart is included which tells the operator how much chain is required for various sizes of pipe. PipeMaster comes standard with cutting head, roller chain, wedges and water supply tank in a wood case. Blades are chosen based on pipe material and are not included with the basic machine. Maximum wall thickness for cutting is 1". The unit has a hydraulic motor which requires an external hydraulic power source. See our Model 6500 Power Pak and 701185 Bypass Valve on the next page.

5624 PipeMaster 6" to 24" (150–600mm)104 lbs. (47kg)

PipeMaster Features:

- Maximum hydraulic requirements 6 gpm/1500 psi
- Gearbox: Worm Drive with 80–90W gear oil required
- Cutting speed: 3" (150mm) of surface travel per minute
1" (25mm) of diameter per minute
- Cutting Clearance: Radial 8" (200mm); Axial 16" (400mm)
- Blade Speed: 1200 RPM
- Construction: Aluminum gearbox, side plated steel; bronze gears, steel roller chain, drive wheels are aluminum with urethane covering

PIPEMASTER ACCESSORIES

- 700821 20' Hydraulic Hose Assembly complete with male/female FF quick disconnects
276288 Flat Face Male Quick Disconnect
276289 Flat Face Female Quick Disconnect

Standard equipment (comes with 5624):

- 700970 Two Drive Wheels for 6" pipe *These drive wheels are required to cut 6" pipes
276693 Water Supply Tank, 4 gallon
4685 Set of 6 steel wedges
4686 Roller Chain, one link section

Number of Chain Links Required:

Pipe Diameter	24" (600mm)
Number of Links	34 pieces






6500 HYDRAULIC POWER PAK221 lbs. (100.5kg)

Features:

- Maximum hydraulic information: 6 gpm/1500 psi
- Adjustable pressure-relief valve
- Complete with 6.5 hp. Honda engine, on two-wheeled cart with pneumatic tires and cage
- Comes with two 700821 – 20' Hydraulic Hose Assemblies complete with male/female FF quick disconnects
- Can be used to power other hydraulic tools



701185 BYPASS VALVE KIT

Bypass Valve 6 gpm/1500 psi13 lbs. (5.9kg)

Bypass Valve Kit is designed to be used with your truck, skid loader, backhoe or tractor's hydraulic system for use with the WHEELER-REX PipeMaster. The 701185 will adapt your current hydraulic system to the specs required to operate the PipeMaster (maximum 6 gpm/1500 psi). Weight is only 10 pounds and it is easy to connect. The PipeMaster's hydraulic lines will directly attach to the quick disconnects for both input and output points on the Bypass Valve. Hydraulic lines are required and are not included with the 701185 and are available as an additional accessory.*

***700821** 20' Hydraulic Hose Assembly complete with male/female FF quick disconnects

Features:

- Maximum input from alternative hydraulic power source: 0–30 gpm/0–3000psi
- Maximum output from Bypass valve: 0–6 gpm/0–1500psi



Blade No. 4706
6" Carbide-tipped
Blade for Steel Pipe



Blade No. 4606
6" Diamond Blade for
CI/DI Pipe



Blade No. 4616
6" Economy Diamond
Blade for DI Pipe

PIPEMASTER BLADES

Three blades for Cast Iron, Ductile Iron and Steel Pipes. Available with diamond or carbide tipped. These blades will fit the WHEELER-REX PipeMaster as well as Universal and Utility Cutters from Reed Manufacturing, Keel and WACHS.

- | | |
|-------------|--|
| 4706 | 6" Carbide Tipped Blade for steel pipes |
| 4606 | 6" Diamond Blade for cast iron, ductile iron and clay pipes |
| 4616 | 6" Economy Diamond Blade for ductile iron pipes. Cut dry or wet. Low price and excellent performance make this blade the best value on the market! |

GROOVING & FABRICATION



MANUAL ROLL GROOVER

Finger-adjust depth screw and gauge keys provide quick adjustment and accurate, repeatable grooves. The formed grooves comply with the specifications required for mechanical coupling systems.

6600 Forms standard roll grooves for 1 1/4"–6" steel pipe 24 lbs. (11kg)

Features:

- Lightweight at 20 lbs. for manual use
- 1 1/4"–6" Schedule 10 and Schedule 40 steel pipe
- 1 1/4"–6" Schedule 10 stainless steel pipe
- Can be used manually or in place when powered by WHEELER-REX Model 6090, 7090, 8090, 6790 or 300 Machines
- Uses heavy duty bearings, hardened and ground shaft and roller
- Comes standard with bent ratchet and ratchet extension
- Grease fittings for lubrication points
- Ball detents on both depth screw and pinion gear

6602 Steel Roll Kit 4 lbs. (1.8kg)

6603 Stabilizer Bars for Model 300 Machines..... 1 lbs. (0.45kg)

6604 Bracket Kit for 6090, 7090, 8090 & 6790 WHEELER-REX Machines 6 lbs. (2.8kg)

277093 1/2" Drive Bent Ratchet



PORTABLE ROLL GROOVERS

For 1"–6" Schedule 5 to Schedule 40 steel. T-handle feed design minimizes operator fatigue. No separate ratchet required. SAFER – short lengths of pipe stay on rollers without operator assistance. All models are lightweight, compact and easily mounted. Carriage does not need to be removed for installation.

8400 2"–6" Roll Groover with Base for 6090, 7090 & 8090 33 lbs. (15kg)

8401 2"–6" Roll Groover with Base for Model 300..... 33 lbs. (15kg)

8402 2"–6" Roll Groover with Base for Model 300 Compact 34 lbs. (15.5kg)

8403 2"–6" Roll Groover with Base for 6790 35 lbs. (15.9kg)

Accessories:

84000 Base Only for Models 6090, 7090 & 8090 Machines

84001 Base Only for Model 300 Machines


84002 Base Only for Model 300 Compact Machines

84003 Base Only for Model 6790 Machines

700628 2"–6" Roller & Shaft Set for Copper Pipe

700639 1" Roller & Shaft Set for Steel

700640 1 1/4"–1 1/2" Roller & Shaft Set for Steel



HYDRAULIC ROLL GROOVER

For use with a pipe threading machine. Makes grooves 1"–16" Schedule 10 and 1"–12" Schedule 40. Conveniently and easily attaches to your 2" or 4" pipe threading machine. The carriage, reamer or die heads do not need to be removed from the machine. A simple mounting bracket provides quick attachment to WHEELER-REX 6090, 7090, 8090 and 6790 Threading Machines as well as Model 300 Machines.


9700 Hydraulic Roll Groover with Base for WHEELER-REX 6090, 7090 & 8090 94 lbs. (42.7kg)

9701 Hydraulic Roll Groover with Base for WHEELER-REX 6790..... 94 lbs. (42.7kg)

9703 Hydraulic Roll Groover with Base for Model 300 Machines..... 94 lbs. (42.7kg)

Features:

- Compact, light weight, powerful and large capacity
- Built-in hydraulic cylinder
- Easy operation with guide roller to prevent the pipe from slipping and helps to eliminate vibration
- Unit comes standard with 2"–6" Roller Set (341133) for Schedule 40
- Capacity: 1"–16" Schedule 10 Steel (341125 Spacer)
1"–12" Schedule 40 Steel Pipe



9700 Hydraulic Roll Groover on Threader.



Support stand not included.

HYDRAULIC ROLL GROOVER ACCESSORIES

- 341560 Machine Mounting Kit for WHEELER-REX 6090,7090 & 8090
- 341562 Machine Mounting Kit for WHEELER-REX 6790
- 341563 Machine Mounting Kit for Model 300 Machines
- 341118 Roller Set 1"- 1 1/2" Sch 5 and 10, Thin-Wall SS
- 341119 Roller Set 2"- 3" Sch 5 and 10, Thin-Wall SS
- 341120 Roller Set 4"- 6" Sch 5 and 10, Thin-Wall SS
- 606460 Roller Set 1"- 1 1/2" Sch 10-40
- 606520• Roller Set 2"- 6" Sch 10-40
- 606459 Roller Set 8"- 12", 8" Sch 40 / 8"-12" Sch 10-30
- 341137 Roller Set 10"- 12" Sch 40
- 341138 Roller Set 14"- 16" Sch 10
- 341141 Shaft 1"- 1 1/2"
- 341124 Guide/Gauge for 8" to 12"
- Included with basic machine.

HYDRAULIC ROLL GROOVING MACHINES

Produces factory grooves on 1"-12" Schedule 10 and 1"- 8" Schedule 40 steel pipe. Unique features include horizontal self-centering head, finished groove indicator light and optional electric power pump. Two (2) 220V outlets required; one (1) for the motor and one (1) for the hydraulic system. Standard rollers included for 2"- 6".

Specifications: 220V 50-60Hz ONLY

Standard Accessories: 2"- 6" rollers, toolbox and tools.

- 7702 2"- 6" with manual pump 50-60Hz Only
Weight, packed 272 lbs. (124kg)
- 7703 2"- 6" with electric power pump 50Hz Only
Weight, packed 262 lbs. (119kg)

Optional Accessories:

- 341118 Roller Set 1"- 1 1/2" Sch 5 & Sch 10, Thin Wall SS
- 341119 Roller Set 2"- 3" Sch 5 & Sch 10, Thin Wall SS
- 341120 Roller Set 4"- 6" Sch 5 & Sch 10, Thin Wall SS
- 606460•• Roller Set 1"-1 1/2" Sch 10-40
- 606520• Roller Set 2"- 6" Sch 10-40
- 606459 Roller Set 8"-12", 8" Sch 40 / 8"-12" Sch 10-30
- 341137 Roller Set 10"- 12" Sch 40
- 341136 Roller Set 14"- 16" Sch 10
- 606461•• Shaft 1"-1 1/2"
- Included with basic machine.
- Both items are required to groove 1" - 1 1/2" pipe

ORBITAL PIPE CUTTER

For 4"-12" (100-300mm) steel and ductile iron pipe. The clamshell frame and modular design make this machine fast and easy to set up and operate. A single frame and gear plate make the orbital the most economical unit for its size range. Standard 115V electric power. Complete with all necessary accessories and packed in a storage case.

- 6412 Cut & Bevel, DI & CI pipe 4"-12" (100-300mm)
- 8412 Cut & Bevel, steel pipe 4"-12" (100-300mm)
- 5412 Cut & Groove, steel pipe 4"-12" (100-300mm)
- Weight 362 lbs. (165kg)

Spares and Accessories:

- 220267 Cut-Off Blade, DI
- 220808 RH Cut-Off Blade, steel
- 220809 LH Cut-Off Blade, steel
- 220705 30° Steel Bevel Blade
- 220706 37 1/2° Steel Bevel Blade
- 220770 45° Steel Bevel Blade
- 220707 45° DI Bevel Blade
- 220855 Support Stand (not included with orbital as standard feature—purchased separately)

12R STYLE MANUAL RATCHET THREADER



MANUAL RATCHET THREADER SETS

WHEELER-REX Drop Heads and Dies are ideal for in-place threading from 1/2" – 2" and are designed to fit Wheeler Ratchet Handle 43310 as well as the Ridge Tool Company Models 12R, OO-R, 111-R, O-R, 30A & 31A, 600 & 700 Power Drives, Reed Mfg. DHR12 Series Drop Heads and Berkley Tool BT40000 Series Drop Heads.

4200	Complete with Tool Box for 1/2"–2"	52 lbs.	(23.6kg)
4202	Complete with Tool Box for 1/2"–1"	27 lbs.	(12kg)
4207	Complete with Tool Box for 1/2"–1 1/4"	39 lbs.	(18kg)
4211	Complete with Tool Box for 1"–2"	42 lbs.	(19kg)
4215	Complete with Tool Box for 1/2"–2" BSPT	49 lbs.	(22kg)
4213	Complete without tool box for 1/2"–2"	35 lbs.	(16kg)
43310	Ratchet Handle.....	5.5 lbs.	(2.5kg)
43300	Replacement Carrying Case.....	14 lbs.	(6kg)

HAND OPERATED OILER

The WHEELER-REX hand operated oiler features a metal reservoir bucket, removable plastic scrap/chip tray and 56" hose with trigger nozzle. Includes one gallon of ThreadMaster Oil.

5900	Weight.....	19 lbs.	(8.6kg)
59050	Replacement Hand Pump		

MINI POWER DRIVES

Lightweight and portable, the WHEELER-REX Mini Power Drive can thread up to 1 1/4" diameter pipe or conduit and 1" bolt or rod in just seconds. Accepts 12R style die heads. Requires only 1 3/4" clearance for working in trenches, overhead and in tight quarters and can tighten nuts, drive cable pullers, turn hoists and jacks, open and close valves. Mechanical high speed reverse speeds removal after threading.

640	Power Drive, 12R Adapter & Safety Vise with Case.....	38 lbs.	(17kg)
-----	---	---------	--------

Accessories:

6401	Case only for 640	13 lbs.	(6kg)
6402	12R Adapter for 640		

Safety Vise:

80115	Absorbs torque from Power Drives to reduce fatigue and protect the operator	6 lbs.	(3kg)
-------	---	--------	-------

12R STYLE DIES - NPT

Wheeler #	Ridge #	Nominal Pipe Size	Type Thread	Die Material
837825	37825	1/2"	NPT	Alloy
837830	37830	3/4"	NPT	Alloy
837835	37835	1"	NPT	Alloy
837840	37840	1 1/4"	NPT	Alloy
837845	37845	1 1/2"	NPT	Alloy
837850	37850	2"	NPT	Alloy

12R STYLE DROP HEAD WITH DIES - NPT

Wheeler #	Ridge #	Nominal Pipe Size	Type Thread	Die Material
837390	37390	1/2"	NPT	Alloy
837395	37395	3/4"	NPT	Alloy
837400	37400	1"	NPT	Alloy
837405	37405	1 1/4"	NPT	Alloy
837410	37410	1 1/2"	NPT	Alloy
837415	37415	2"	NPT	Alloy

12R STYLE DIES - BSPT

Wheeler #	Ridge #	Nominal Pipe Size	Type Thread	Die Material
866125	66125	1/2"	BSPT	Alloy
866130	66130	3/4"	BSPT	Alloy
866135	66135	1"	BSPT	Alloy
866140	66140	1 1/4"	BSPT	Alloy
866145	66145	1 1/2"	BSPT	Alloy
866150	66150	2"	BSPT	Alloy

12R STYLE DROP HEAD WITH DIES - BSPT

Wheeler #	Ridge #	Nominal Pipe Size	Type Thread	Die Material
865965	65965	1/2"	BSPT	Alloy
865970	65970	3/4"	BSPT	Alloy
865975	65975	1"	BSPT	Alloy
865980	65980	1 1/4"	BSPT	Alloy
865985	65985	1 1/2"	BSPT	Alloy
865990	65990	2"	BSPT	Alloy

PIPE THREADING MACHINES



MODEL 8991 SHOWN ON
OPTIONAL 841 STAND

8991 SIDEKICK III PIPE THREADER

The WHEELER-REX Model 8991 is a full-featured threading machine for $\frac{1}{2}$ " to 1" pipe. Featuring front and rear chucks, an auto-open auto-oiling notch-type die head, safety auto shut off, larger carriage & cutter handles and a unique one blade reamer.

Model 8991 Features:

- Auto open notch die head
- Front and rear chucks
- Auto-oiling die head
- Large scrap tray
- Weighs only 58 pounds
- Safety auto shut off
- One blade reamer
- 1" pipe threading time — 16 seconds
- Built-in carrying handle
- Foot switch
- Spare cutter wheel

Includes:


- $\frac{1}{2}$ "-1" die head
- Two sets of dies: $\frac{1}{2}$ "- $\frac{3}{4}$ " and 1"

Specifications:

Standard Capacity: $\frac{1}{2}$ "-1"
Voltage: 115 Volt
Motor: 400 Watt series, single phase
Free Speed: 55 RPM
Net Weight: 58 lbs.
Dimensions: 15" x 11" x 12"

Optional:

- $\frac{1}{4}$ "- $\frac{3}{8}$ " NPT dies
- $\frac{1}{4}$ "-1" NPT Die Head
- 841 Stand

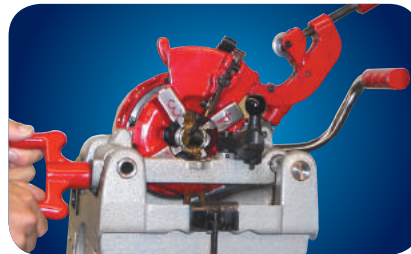

Weight..... 70 lbs. (31.7kg)
Net weight..... 58 lbs. (26kg)

8992 Same as 8991 except comes complete with 60131 manual opening die head for $\frac{1}{4}$ "-1". Along with $\frac{1}{4}$ "- $\frac{3}{8}$ ", $\frac{1}{2}$ "- $\frac{3}{4}$ " and 1" NPT dies.

Weight..... 70 lbs. (31.7kg)
Net weight..... 58 lbs. (26kg)

8993 Same as 8991 except comes complete with two $\frac{1}{2}$ "-1" quick opening 70131 die heads and one each $\frac{1}{2}$ "- $\frac{3}{4}$ " and 1" NPT dies.

Weight..... 78 lbs. (35kg)
Net weight..... 58 lbs. (26kg)

8998 Same as 8991 except comes complete with 220V motor.

Weight..... 70 lbs. (31.7kg)
Net weight..... 58 lbs. (26kg)

THREE YEAR WARRANTY, INCLUDING ELECTRIC MOTORS

ORDER NOW

Eastern Time 1-800-321-7950

Fax 440-992-2925

wheeler@wheelerrex.com

PIPE THREADING MACHINES

CONTINUED



8090

Features complete **interchangeability** with the Model 300 dies and die heads. This portable and compact, high-performance threading machine has a self-opening die head and through the die head oiling. Completely equipped to cut, thread and ream.

Features: For 1/2" to 2" pipe, 110/120V, single phase 700W series motor, average noise level: 85db, maximum amperage under load: 15.3, no load RPM: 39
Includes: 1/2"-2" die head, two sets of NPT dies: 1/2"-3/4" and 1"-2", spare cutter wheel, foot switch, 4 legs.

Weight 186 lbs. (84.5kg)
 Net weight 140 lbs. (64kg)

THREE YEAR WARRANTY, INCLUDING ELECTRIC MOTORS.



8096 Same as 8090 except comes with two 80118 Die Heads.

Weight 200 lbs. (91kg)
 Net weight 140 lbs. (64kg)

THREE YEAR WARRANTY, INCLUDING ELECTRIC MOTORS.

8097 Same as 8090 except comes with 897065 Universal Die Head for 1/8"-2".

Weight, packed 186 lbs. (84.5kg)
 Net weight 140 lbs. (64kg)

THREE YEAR WARRANTY, INCLUDING ELECTRIC MOTORS.

8098 Same as 8090 except comes with 220V motor.

Weight, packed 186 lbs. (84.5kg)
 Net weight 140 lbs. (64kg)

THREE YEAR WARRANTY, INCLUDING ELECTRIC MOTORS.



BALL DETENTS ARE STANDARD ON ALL WHEELER-REX DIE HEADS

UNIVERSAL REPLACEMENT DIES

WHEELER-REX Dies are manufactured from Tool Steel and are designed to fit Wheeler Die Head 897065 as well as the following Ridge Tool Models 504A, 711, 713, 811A, 815A, 816, 817, and 842.

UNIVERSAL DIE HEAD

Wheeler # Ridge #
 897065 97065 For 1/8"-2" Quick opening die head 12 lbs. (5.5kg)

PIPE DIES FOR UNIVERSAL DIE HEADS - NPT

Wheeler #	Ridge #	Nominal Pipe Size	Type Thread	Die Material
847745	47745	1/2" - 3/4"	NPT	Tool Steel
847750	47750	1" - 2"	NPT	Tool Steel

PIPE DIES FOR UNIVERSAL DIE HEADS - NPT FOR STAINLESS STEEL

Wheeler #	Ridge #	Nominal Pipe Size	Type Thread	Die Material
847785	47785	1/2" - 3/4"	NPT	HSS
847790	47790	1" - 2"	NPT	HSS





6790

The 6790 features a self-opening die head, with through die head oiling. Ultimate accuracy with quick changes between pipe sizes, producing quality threads. The 6790 offers adjustable thread length, three-stage oil filtration system, and a sturdy three flute reamer that covers the entire 1/2"-4" range. The 6790 is a three speed machine that is powered by a durable condenser motor, with an extremely low noise level. Completely equipped to cut, thread, and ream.

- Features:** For 1/2" to 4" pipe, 110V/120V or 220V/230V, single phase 1KW condenser motor, average noise level: 72db, maximum amperage under load: 18.5
no load RPM: 15/27/48, 1Hp, 50/60HZ
- Includes:** Two die heads: 1/2"-2" and 2 1/2"-4", three sets of NPT dies: 1/2"-3/4", 1"-2" and 2 1/2"-4", spare cutter wheel, foot switch, 4 legs and built-in tool tray.
- Optional:** 1/4"-3/8" NPT, 3/4"-4" beveling and grooving, 5/16"-2" UNC bolt, and 1/2"-4" NPSM
- Weight** 409 lbs. (186kg)
- Net weight** 326 lbs. (148kg)

THREE YEAR WARRANTY, INCLUDING ELECTRIC MOTORS.

6793 Same as 6790 except with **THREE (3) self-opening NOTCH-TYPE DIE HEADS**. This offers accuracy, quick changes between pipe sizes and eliminates switching dies when changing pipe sizes. Completely equipped to cut, thread, and ream.

- Weight** 423 lbs. (192kg)
- Net weight** 344 lbs. (157kg)

THREE YEAR WARRANTY, INCLUDING ELECTRIC MOTORS.

6794 Same as 6790 except with a **BLADE-TYPE CUTTER**, which is designed for plastic lined pipe, as well as standard steel pipe. Completely equipped to cut, thread, and ream.

- Features:** For 1/2" to 4" pipe, 110V/120V or 220V/230V, single phase 1KW condenser motor, average noise level: 72db, maximum amperage under load: 18.5
no load RPM: 15/27/48
- Includes:** Two die heads: 1/2"-2" and 2 1/2"-4", three sets of NPT dies: 1/2"-3/4", 1"-2" and 2 1/2"-4", spare cutter wheel, foot switch, 4 legs and built-in tool tray.
- Optional:** 1/4"-3/8" NPT, 3/4"-4" beveling and grooving, 5/16"-2" UNC bolt, and 1/2"-4" NPSM
- Weight** 406 lbs. (185kg)
- Net weight** 334 lbs. (152kg)

THREE YEAR WARRANTY, INCLUDING ELECTRIC MOTORS.



6590

This machine has self opening notch type die heads with through die head oiling. These die heads offer accuracy and quick changes between pipe sizes, while providing quality threads. The 6590 is totally gear driven and powered by a condenser motor, producing extremely low noise levels. Quiet operation permits use in hospitals, factories, and in other locations where noise can be a problem. Completely equipped to cut, thread, and ream.

- Features:** For 2 1/2"-6" pipe, 110/120V or 220V/230V, single phase .75KW condenser motor, average noise level: 76db, maximum amperage under load: 14.5, no load RPM: 6.1/20.2, 1Hp, 50/60HZ
- Includes:** Two die heads: 2 1/2"-4" and 5"-6", two sets of NPT dies: 2 1/2"-4", and 5"-6", foot switch, 4 legs and Blade-Type Cutter.
- Optional:** 2 1/2"-6" beveling and grooving
- Weight** 532 lbs. (242kg)
- Net weight** 451 lbs. (206kg)

THREE YEAR WARRANTY, INCLUDING ELECTRIC MOTORS.



THREADING ACCESSORIES & CUTTING FLUID



THREADER CARTS

60513	Collapsible Cart for WHEELER-REX 8090 Pipe Threader	101 lbs.	(46kg)
60508	Collapsible Cart for WHEELER-REX 7090 Pipe Threader	101 lbs.	(46kg)
60509	Collapsible Cart for WHEELER-REX 6090 Pipe Threader	101 lbs.	(46kg)
60512	Collapsible Cart for 300 Style Pipe Threader.....	101 lbs.	(46kg)
60518	Anti-Tip Bracket for Collapsible Carts		
60506	Threader Cart w/out Toolbox for 6390/6790/6794/6793.....	135 lbs.	(61.4kg)
60507	Threader Cart with Toolbox for 6390/6790/6794/6793	178 lbs.	(81kg)
60514	Threader Cart w/out Toolbox for 6590	135 lbs.	(61.4kg)
60515	Threader Cart with Toolbox for 6590.....	178 lbs.	(81kg)



NIPPLE ATTACHMENTS

62000	1/2" NPT Nipple Chuck.....	3 lb.	(1.4kg)
62001	3/4" NPT Nipple Chuck	3 lb.	(1.4kg)
62002	1" NPT Nipple Chuck.....	3 lb.	(1.4kg)
62003	1 1/4" NPT Nipple Chuck.....	5 lb.	(2.3kg)
62004	1 1/2" NPT Nipple Chuck.....	5 lb.	(2.3kg)
62005	2" NPT Nipple Chuck.....	5.5 lb.	(2.5kg)
62006	2 1/2" NPT Nipple Chuck.....	8 lb.	(3.6kg)
62007	3" NPT Nipple Chuck.....	8.5 lb.	(3.8kg)
62009	4" NPT Nipple Chuck.....	12 lb.	(5.5kg)



841 PORTABLE THREADER STAND

Light weight folding stand. Designed to fit model 7991/8991.....30 lbs. (14kg)

WHEELER-REX PIPE THREADING OIL


WHEELER-REX Pipe Threading Oil gives you premium performance at a reasonable price. Blended to thread Stainless Steel, Galvanized as well as Carbon Steel means you only need one oil for all your needs. Low odor and transparent appearance make this fluid pleasant to use in addition to creating quality threads and long die life.



60601	1 Gallon ThreadMaster Oil.....	8 lbs.	(3.5kg)
60604	1 Quart ThreadMaster Oil.....	2.5 lbs.	(1kg)
60603	2 Quart ThreadMaster Oil.....	4.5 lbs.	(2kg)
60602	5 Gallon Pail of ThreadMaster Oil.....	41 lbs.	(19kg)
60655	55 Gallon Drum of ThreadMaster Oil.....	434 lbs.	(197kg)
60607	1 Gallon ThreadMaster Oil for Stainless Steel		
60608	5 Gallon Pail of ThreadMaster Oil for Stainless Steel		

THREADING ACCESSORIES

CONTINUED

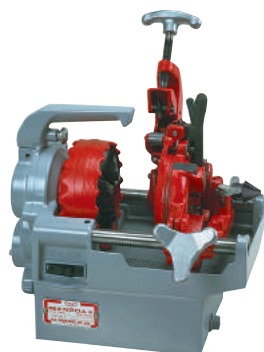

6990 PONY 1/4"-3/4" MAXIMUM PIPE RANGE

PART NO.	DIES
60210	1/4"-3/8" NPT (60131 Die Head)
60211•	1/2"-3/4" NPT (60130 Die Head)
DIE HEADS	
60130•	1/2"-3/4" NPT/Self Opening Notch Style
SPARE PARTS	
60322•	Cutter Wheel
600979	Chuck Jaw Insert Set
602005	Motor Brush Set
602029	Reamer Cone


- Included with basic machine.



6991 SIDEKICK 1/4"-1" MAXIMUM PIPE RANGE

PART NO.	DIES
60210	1/4"-3/8" NPT (60131 Die Head)
60211•	1/2"-3/4" NPT (60130 & 60131 Die Heads)
60212•	1" NPT (60131 Die Head)
60256	1/2"-3/4" NPSM (60131 Die Head)
60257	1" NPSM (60131 Die Head)
DIE HEADS	
60131•	1/4"-1" NPT/Manual Opening
SPARE PARTS	
60322•	Cutter Wheel
602103	Chuck Jaw Insert Set
602005	Motor Brush Set
602125	Reamer Cone

- Included with basic machine.



7991 SIDEKICK II AND 8991 SIDEKICK III 1/4"-1" MAXIMUM PIPE RANGE

PART	DIES
60210	1/4"-3/8" NPT Dies (60131 Die Head)
60211•	1/2"-3/4" NPT Dies (60130, 60131 & 70131 Die Heads)
60212•	1" NPT Dies (60131 & 70131 Die Heads)
60213	1/4"-3/8" NPT Dies for S.S. (60131 Die Head)
60214	1/2"-3/4" NPT Dies for S.S. (60131 & 70131 Die Heads)
60215	1" NPT Dies for S.S. (60131 & 70131 Die Heads)
60256	1/2"-3/4" NPSM Dies (60131 & 70131 Die Heads)
60257	1" NPSM Dies (60131 & 70131 Die Heads)
DIE HEADS	
70131•	1/2"-1" NPT/Auto-Open, Notch Type Die Head
60131	1/4"-1" NPT/Manual Opening Die Head
60136	1/4"-3/8" NPT/Auto-Open Die Head
SPARE PARTS	
60322•	Cutter Wheel
62322	Cutter Wheel for Stainless Steel
602103	Chuck Jaw Insert Set
606665	Motor Brush Set
606705	Reamer Blade

- Included with basic machine.

ORDER NOW

Eastern Time 1-800-321-7950

Fax 440-992-2925

wheeler@wheelerrex.com

THREADING ACCESSORIES

CONTINUED

Model 6890 was discontinued 11/1/06 and these parts are interchangeable with Model 7890.

7890 1/4"-1 1/2" MAXIMUM PIPE RANGE



PART NO.	DIES
60200	1/4"-3/8" NPT (60120 Die Head)
60201 •	1/2"-3/4" NPT (60120 Die Head)
60202 •	1"-1 1/2" NPT (60120 Die Head)
60220	1/4"-3/8" HSS NPT (60120 Die Head)
60346	5/16"-18 UNC Bolt (60125 Die Head)
60347	3/8"-16 UNC Bolt (60125 Die Head)
60348	7/16"-14 UNC Bolt (60125 Die Head)
60340	1/2"-13 UNC Bolt (60125 Die Head)
60341	5/8"-11 UNC Bolt (60125 Die Head)
60342	3/4"-10 UNC Bolt (60125 Die Head)
60343	7/8"-9 UNC Bolt (60125 Die Head)
60344	1"-8 UNC Bolt (60125 Die Head)
60345	1 1/8"-1 1/4" 7 UNC Bolt (60125 Die Head)
60349	1 1/2"-6 UNC Bolt (60125 Die Head)
DIE HEADS	
60120 •	1/4"-1 1/2" NPT/Manual Opening
60125	5/16"-1 1/2" UNC Bolt/Manual Opening
SPARE PARTS	
60324 •	Cutter Wheel
60323	Chuck Jaw Insert Set

- Included with basic machine.

7090 & 8090 1/8"-2" MAXIMUM PIPE RANGE



8090
Threading
Machine



80118 Die Head

PART NO.	DIES
70201 •	1/2"-3/4" NPT (70118, 80118 & 897065 Die Heads)
70209 •	1"-2" NPT (70118, 80118 & 897065 Die Heads)
847745	1/2"-3/4" NPT (70118, 80118 & 897065 Die Heads)
847750	1"-2" NPT (70118, 80118 & 897065 Die Heads)
847785	1/2"-3/4" S.S. (70118, 80118 & 897065 Die Heads)
847790	1"-2" S.S. (70118, 80118 & 897065 Die Heads)
DIE HEADS	
80118#	1/2"-2" NPT/Automatic Opening Die Head for 8090
897065	1/8"-2" NPT/Quick Opening Die Head
SPARE PARTS	
60324 •	Cutter Wheel
70235	Chuck Jaw Insert Set
60508	Collapsible Threader Cart for 7090
60513	Collapsible Threader Cart for 8090

- Included with 8090 basic machine.

6090 1/4"-2" MAXIMUM PIPE RANGE



PART NO.	DIES
60200	1/4"-3/8" NPT (60115 Die Head)
60201 •	1/2"-3/4" NPT (60118 Die Head)
60209 •	1"-2" NPT (60118 Die Head)
60220	1/4"-3/8" HSS NPT (60115 Die Head)
60233	1/2"-3/4" S.S. (60118 Die Head)
60238	1"-2" S.S. (60118 Die Head)
60250	1/2"-3/4" NPT for PVC (60118 Die Head)
60251	1"-2" NPT for PVC (60118 Die Head)
60353	3/4" Beveling 37.5° (60117 Die Head)
60354	1"-2" Beveling 37.5° (60117 Die Head)
60338	3/4" Grooving (60117 Die Head)
60339	1"-2" Grooving (60117 Die Head)
60230	1/2"-3/4" Conduit (60116 Die Head)
60231	1"-1 1/4" Conduit (60116 Die Head)
60232	1 1/2"-2" Conduit (60116 Die Head)
60346	5/16"-18 UNC Bolt (60114 Die Head)
60347	3/8"-16 UNC Bolt (60114 Die Head)
60348	7/16"-14 UNC Bolt (60114 Die Head)
60340	1/2"-13 UNC Bolt (60114 Die Head)
60341	5/8"-11 UNC Bolt (60114 Die Head)

- Included with basic machine.



6090 1/4"-2" MAXIMUM PIPE RANGE CONTINUED

60342	3/4"-10 UNC Bolt (60114 Die Head)
60343	7/8"-9 UNC Bolt (60114 Die Head)
60344	1"-8 UNC Bolt (60114 Die Head)
60345	1 1/8" & 1 1/4" - 7 UNC Bolt (60114 Die Head)
60349	1 1/2"-6 UNC Bolt (60114 Die Head)
60352	2"-4 1/2" UNC Bolt (60114 Die Head)
60360	3/4" Beveling Dies for SS (60117 Die Head)
60361	1"-2" Beveling Dies for SS (60117 Die Head)
60362	3/4" Grooving Dies for SS (60117 Die Head)
60363	1"-2" Grooving Dies for SS (60117 Die Head)

DIE HEADS

60115	1/4"-2" NPT/Manual Opening
60118•	1/2"-2" NPT/Automatic Opening
60114	5/16"-2" UNC Bolt/Manual Opening
60117	3/4"-2" Beveling & Grooving
60112	1/2"-3/4" NPT/Automatic Opening,/Notch type
60113	1"-2" NPT/Automatic Opening,/Notch type
60116	1/2"-2" Conduit/Manual Opening

SPARE PARTS AND CART

60324•	Cutter Wheel
60318	Chuck Jaw Insert Set
60328	Chuck Jaw Insert Set for Plastic Coated Pipe
60509	Collapsible Threader Cart

- Included with basic machine.

6390 1/4"-2" MAXIMUM PIPE RANGE

PART NO.	DIES
60200	1/4"-3/8" NPT (60115 Die Head.)
60201•	1/2"-3/4" NPT (60112 & 60115 Die Heads)
60220	1/4"-3/8" HSS NPT (60115 Die Head)
60233	1/2"-3/4" S.S. (60112 & 60115 Die Heads)
60208•	1"-2" NPT (60113 Die Head)
60234	1"-2" S.S. (60113 Die Head)
60250	1/2"-3/4" NPT for PVC (60112 & 60115 Die Heads)
60252	1"-2" NPT for PVC (60113 Die Head)
60353	3/4" Beveling 37.5° (60117 Die Head)
60354	1"-2" Beveling 37.5° (60117 Die Head)
60338	3/4" Grooving (60117 Die Head)
60339	1"-2" Grooving (60117 Die Head)
60230	1/2"-3/4" Conduit (60116 Die Head)
60231	1"-1 1/4" Conduit (60116 Die Head)
60232	1 1/2"-2" Conduit (60116 Die Head)
60346	5/16"-18 UNC Bolt (60114 Die Head)
60347	3/8"-16 UNC Bolt (60114 Die Head)
60348	7/16"-14 UNC Bolt (60114 Die Head)
60340	1/2"-13 UNC Bolt (60114 Die Head)
60341	5/8"-11 UNC Bolt (60114 Die Head)
60342	3/4"-10 UNC Bolt (60114 Die Head)
60343	7/8"-9 UNC Bolt (60114 Die Head)
60344	1"-8 UNC Bolt (60114 Die Head)
60345	1 1/8" & 1 1/4" - 7 UNC Bolt (60114 Die Head)
60349	1 1/2"-6 UNC Bolt (60114 Die Head)
60352	2"-4 1/2" UNC Bolt (60114 Die Head)

DIE HEADS

60112•	1/2"-3/4" NPT/Automatic Opening/Notch type
60113•	1"-2" NPT/Automatic Opening/Notch type
60114	5/16"-2" UNC Bolt/Manual Open
60115	1/4"-2" NPT/Manual Opening
60117	3/4"-2" Beveling & Grooving
60116	1/2"-2" Conduit/Manual Opening

SPARE PARTS AND CART

60324•	Cutter Wheel
60306	Chuck Jaw Insert Set for black iron and PVC pipes
60506	Threader Cart NO Toolbox
60507	Threader Cart with Toolbox

- Included with basic machine.



THREADING ACCESSORIES

CONTINUED

6790, 6793 & 6794 1/4"-4" MAXIMUM PIPE RANGE

PART NO.	DIES
60200	1/4"-3/8" NPT (60115 Die Head)
60201...	1/2"-3/4" NPT (60112, 60115 & 60118 Die Heads)
60233	1/2"-3/4" S.S. (60112, 60115 & 60118 Die Heads)
60250	1/2" - 3/4" NPT for PVC (60112, 60115 & 60118 Die Heads)
60209•••	1"-2" NPT (60118 & 6 0115 Die Heads)
60208•••	1"-2" NPT (60113 Die Head)
60234	1"-2" S.S. Dies (60113 Die Head)
60238	1"-2" S.S. (60118 & 60115 Die Heads)
60251	1" - 2" NPT for PVC (60118 & 60115 Die Heads)
60206...	2 1/2"-4" Taper or Straight Threads (60106 Die Head)
60252	1" - 2" NPT for PVC (60113 Die Head)
60235	2 1/2"-4" S.S. (60106 Die Head)
60253	2 1/2" - 4" NPT for PVC (60106 Die Head)
60353	3/4" Beveling 37.5° (60117 Die Head)
60354	1"-2" Beveling 37.5° (60117 Die Head)
60330	2 1/2"-4" Beveling 37.5° (60123 Die Head)
60332	2 1/2"-4" S.S. Beveling 37.5° (60123 Die Head)
60338	3/4" Grooving (60117 Die Head)
60339	1"-2" Grooving (60117 Die Head)
60227	2 1/2"-3 1/2" Grooving (60123 Die Head)
60228	4" Grooving (60123 Die Head)
60357	2 1/2"-3 1/2" Grooving Dies for S.S. (60123 Die Head)
60358	4" Grooving Dies for S.S. (60123 Die Head)
60346	5/16"-18 UNC Bolt (60114 Die Head)
60347	3/8"-16 UNC Bolt (60114 Die Head)
60348	7/16"-14 UNC Bolt (60114 Die Head)
60340	1/2"-13 UNC Bolt (60114 Die Head)
60341	5/8"-11 UNC Bolt (60114 Die Head)
60342	3/4"-10 UNC Bolt (60114 Die Head)
60343	7/8"-9 UNC Bolt (60114 Die Head)
60344	1"-8 UNC Bolt (60114 Die Head)
60345	1 1/8"-1 1/4"-7 UNC Bolt (60114 Die Head)
60349	1 1/2"-6 UNC Bolt (60114 Die Head)
60352	2"-4 1/2 UNC Bolt (60114 Die Head)
60230	1/2"-3/4" Conduit (60116 Die Head)
60231	1"-1 1/4" Conduit (60116 Die Head)
60232	1 1/2"-2" Conduit (60116 Die Head)
60220	1/4"-3/8" HSS NPT (60115 Die Head)
60360	3/4" Beveling Dies for SS (60117 Die Head)
60361	1"-2" Beveling Dies for SS (60117 Die Head)
60362	3/4" Grooving Dies for SS (60117 Die Head)
60363	1"-2" Grooving Dies for SS (60117 Die Head)
DIE HEADS	
60115	1/4"-2" NPT/Manual Opening
60118•••	1/2"-2" NPT/Automatic Opening
60106...	2 1/2"-4" Taper or Straight Threads/Automatic Opening/Notch Type
60117	3/4"-2" Beveling & Grooving
60123	2 1/2"-4" Beveling & Grooving
60112•••	1/2"-3/4" NPT/Automatic Opening/Notch type
60113•••	1"-2" NPT/Automatic Opening/Notch type
60114	5/16"-2" UNC Bolt/Manual Opening
60116	1/2"-2" Conduit/Manual Opening
SPARE PARTS AND CART	
60324...	Cutter Wheel
60310	Cutter Wheel
60301	HSS Cut-Off Blade
60390••	Cut-Off Blade for 6794
220204	HSS 10° Bevel Blade
60307	Chuck Jaw Insert Set
60327	Chuck Jaw Insert Set for Plastic Coated Pipe
60506	Threader Cart NO Toolbox
60507	Threader Cart with Toolbox
600282	Straight Profile Block Assembly for 2 1/2"-4"
603680•••	Wheel Cutoff Assembly
600845••	Blade Cutoff Assembly

- Included with basic machine.
- Included with 6794 machine.
- Included with 6793 machine.






6590 2 1/2"-6" MAXIMUM PIPE RANGE

PART NO.	DIES
60206•	2 1/2"-4" Tapered or Straight (60127 Die Head)
60235	2 1/2"-4" NPT S.S. (60127 Die Head)
60253	2 1/2"-4" NPT for PVC (60127 Die Head)
60207•	5"-6" Tapered or Straight (60128 Die Head)
60236	5"-6" NPT S.S. (60128 Die Head)
60255	5"-6" NPT for PVC (60128 Die Head)
60330	2 1/2"-4" Beveling 37.5° (60121 Die Head)
60332	2 1/2"-4" S.S. Beveling 37.5° (60121 Die Head)
60331	5"-6" Beveling 37.5° (60122 Die Head)
60333	5"-6" S.S. Beveling 37.5° (60122 Die Head)
60227	2 1/2"-3 1/2" Grooving (60121 Die Head)
60228	4" Grooving (60121 Die Head)
60357	2 1/2"-3 1/2" Grooving Dies for S.S. (60121 Die Head)
60358	4" Grooving Dies for S.S. (60121 Die Head)
60359	5"-6" Grooving Dies for S.S. (60122 Die Head)
60229	5"-6" Grooving (60122 Die Head)
DIE HEADS	
60121	2 1/2"-4" Beveling & Grooving
60122	5"-6" Beveling & Grooving
60127•	2 1/2"-4" NPT Notch Style Tapered or Straight Automatic Opening
60128•	5"-6" NPT Notch Style Tapered or Straight Automatic Opening
ACCESSORIES	
60390•	Cut-Off Blade
60301	HSS Cut-Off Blade
220204	HSS 10° Bevel Blade
60310	Cutter Wheel
600280	Straight Profile Block Assembly
60514	Threader Cart NO Toolbox
60515	Threader Cart with Toolbox
60307	Chuck Jaw Insert Set
60327	Chuck Jaw Insert Set for Plastic Coated Pipe

- Included with basic machine.

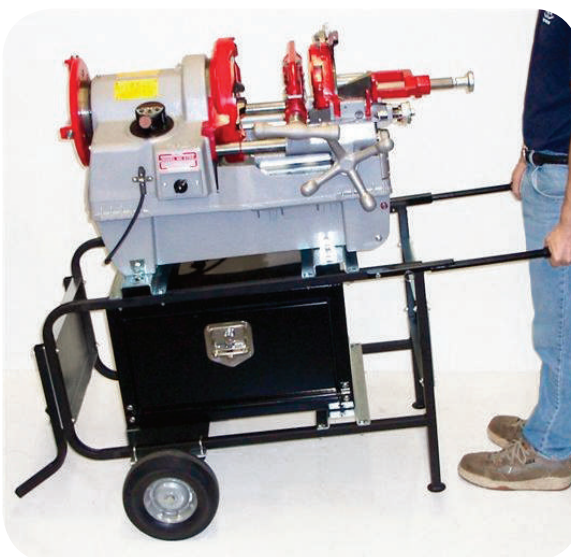

6790 mounted on
60507 cart.

HYDROSTATIC TEST PUMPS

MANUAL HYDROSTATIC TEST PUMPS

Ideal for testing residential water lines. Also for pressure testing small pressure tanks, sprinkler, boiler and solar systems. Lightweight and easy to use. 3/4" garden hose female inlet and 9/16"- 18 JICF male outlet. Equipped with shut off valve, gauge, and adjustable internal relief valve. 10 foot output hose included.



Features: 300psi (20 bar)

- **29200**12 lbs. (5.5kg)

Accessories:

- 3917 10' High-Pressure Output Hose
- 29250 Pump Rebuild Kit
- 34550 10' Long Suction Hose with strainer (3/4" male garden hose connection)



Features: 1000psi (68 bar)

- **29201**12 lbs. (5.5kg)

Accessories:

- 3917 10' High-Pressure Output Hose (3/8" NPT male output connection)
- 29250 Pump Rebuild Kit
- 34550 10' Long Suction Hose with strainer (3/4" male garden hose connection)



Features: 870 psi/60 bar, 1/2" connections

- **29900** with 1/2" connections.....18 lbs. (8kg)

Accessories:

- 3917 10' High-Pressure Output Hose
- 29950 Pump Repair Kit

Designed especially for use in heating, compressed air, refrigeration systems, oil installations and sprinkler systems. Complete with 2.6 gallon stainless steel integral tank and 10 ft. output hose.

GAS POWERED HYDROSTATIC TEST PUMPS

Ideal for certifying the integrity of newly installed or repaired water lines, sewer lines, commercial sprinkler systems, and pressure vessels. All gasoline driven models come with Briggs & Stratton™ Intek Pro or Honda engines and are backed by their warranties. Recirculating systems provide pump protection and water conservation. Carts are wheeled for ease of movement. All units come standard with 10 ft. high-pressure output hose and 10 ft. suction hose with strainer.

ROLLER PUMPS

Features: 5.4 gpm/300 psi (20.5 lpm/21 bar)

- **46301** with 6.5 hp. B&S engine, Cart w/wheels 151 lbs. (69kg)
- **463010** with 5.5 hp Honda engine, Cart w/wheels 150 lbs. (68kg)

Accessories:

- 36352 Pump Repair Kit
- 34550 10' Suction Hose
- 221065 10' High-Pressure Output Hose

TWIN PISTON PUMPS

Features: 10 gpm/400 psi (38 lpm/28 bar)

- **46453** with 6.5 hp. B&S engine, Cart w/wheels 162 lbs. (74kg)
- **464530** with 5.5 hp Honda engine, Cart w/wheels 159 lbs. (72kg)
- **36454** with 6.5 hp. B&S engine, Roll-cage 136 lbs. (61kg)
- **364540** with 5.5 hp Honda engine, Roll-cage 136 lbs. (61kg)

Accessories:

- 36351 Pump Repair Kit
- 34550 10' Suction Hose
- 221065 10' High-Pressure Output Hose

TRIPLEX PLUNGER PUMP

Features: 3.5 gpm/300 psi (13 lpm/206 bar)

- **373080** with 8.5 hp. Honda engine, Cage w/wheels 130 lbs. (59kg)

Accessories:

- 36395 Valve Kit
- 36396 Pump Seal Kit
- 34550 10' Suction Hose
- 220577 10' High-Pressure Output Hose

TRIPLEX PLUNGER PUMPS

Features: 3.5 gpm/1200 psi (13 lpm/82bar)

- **46200** with 6.5 hp. B&S engine, Cart w/wheels 130 lbs. (59kg)
- **462000** with 5.5 hp Honda engine, Cart w/wheels 130 lbs. (59kg)
- **36200** with 6.5 hp. B&S engine, Roll-cage 87 lbs. (40kg)
- **362000** with 5.5 hp Honda engine, Roll-cage 87 lbs. (40kg)

Accessories:

- 34052 Pump Repair Kit
- 34053 Pump Seal Kit
- 34550 10' Suction Hose
- 220577 10' High-Pressure Output Hose





TRIPLE DIAPHRAGM PUMPS ...CAPABLE OF HANDLING 10% CHLORINE SOLUTIONS

Features: 10 gpm/500 psi (37.8 lpm/35 bar)

Udor Pump Models

- **46501** with 6.5 hp. B&S engine, Cart w/wheels..... 161 lbs. (73kg)
- **465010** with 5.5 hp Honda engine, Cart w/wheels..... 162 lbs. (73kg)
- **46503** with 6.5hp B&S engine, Roll-cage 155 lbs. (70kg)
- **465030** with 5.5hp Honda engine, Roll-cage 155 lbs. (70kg)
- **46701** with 6.5 hp. B&S engine, Cage w/tank..... 211 lbs. (96kg)
- **467010** with 5.5 hp Honda engine, Cage w/tank..... 211 lbs. (96kg)

Comet Pump Models

- **46521** with 6.5 B&S engine, Cart w/wheels..... 155 lbs. (70kg)
- **465210** with 5.5 Honda engine, Cart w/wheels..... 155 lbs. (70kg)
- **46523** with 6.5 B&S engine, Roll-cage 150 lbs. (68kg)
- **465230** with 5.5 Honda engine, Roll-cage 150 lbs. (68kg)

Accessories:

- 36345 Pump Repair Kit for 46501, 465010, 46701, 467010
- 36349 Pump Repair Kit for models 46500 and 465000
- 36391 Pump Repair Kit for 46521, 4645210, 46523, 465230
- 36345 Pump Repair Kit for 46503, 465030
- 34550 10' Suction Hose
- 221065 10' High-Pressure Output Hose for Udor pumps
- 220577 High Pressure Output Hose for Comet pumps

TRIPLE DIAPHRAGM PUMPS ...CAPABLE OF HANDLING 10% CHLORINE SOLUTIONS

Features: 15 gpm/300 psi (57 lpm/21 bar)

- **46600** with 6.5 hp. B&S engine, Cart w/wheels..... 173 lbs. (79kg)
- **466000** with 5.5 hp Honda engine, Cart w/wheels 167 lbs. (76kg)

Features: 26 gpm/250 psi (98 lpm/17 bar)

- **46800** with 6.5 hp. B&S engine, Cage w/wheels..... 246 lbs. (112kg)
- **468000** with 5.5 hp Honda engine, Cage w/wheels..... 246 lbs. (112kg)

Accessories:

- 36347 Pump Repair Kit for models 46600 and 466000
- 36390 Pump Repair Kit for models 46800 and 468000
- 34550 10' Suction Hose
- 221065 10' High-Pressure Output Hose



ELECTRIC POWERED HYDROSTATIC TEST PUMPS PORTABLE

Features: 4 gpm / 300 psi (15 lpm / 20 bar), 1/2hp, 115/230V, 60Hz motor

- **39300** Ideal for certifying fire sprinkler lines, commercial plumbing and industrial testing. Compact, lightweight for portability, but yet powerful and rugged for the professional. Built in adjustable pressure regulator.

Weight34lbs (15kg)

Accessories:

- 39350 Pump Repair Kit
- 34550 10' Suction Hose



TWIN PISTON PUMPS

Features: 3 gpm / 500 psi (11 lpm / 35 bar) 1hp capacitor start motor

- **35100** 115/230V, single phase, 60Hz, Roll-cage 86 lbs. (39kg)
- **35101** 220V, single phase, 50Hz, Roll-cage..... 86 lbs. (39kg)

Accessories:

- 36361 Pump Repair Kit
- 34550 10' Suction Hose



DUPLEX PLUNGER PUMPS

Features: 1 gpm / 1000 psi (3.7 lpm / 68 bar) 1hp capacitor start motor

- **33100** 115/230V, single phase, 60Hz, Roll-cage 110 lbs. (50kg)
- **33101** 220V, single phase, 50Hz, Roll-cage..... 110 lbs. (50kg)

Accessories:

- 36389 Pump Repair Kit
- 34550 10' Suction Hose



TRIPLEX PLUNGER PUMPS

Features: Single phase, 1.5hp, 15amp capacitor start motor, Cart w/wheels

- **47100** 2.2gpm / 1000psi (8.3 lpm / 68 bar), 115V, 60Hz 127 lbs. (57kg)
- **47101** 2.2gpm / 1000psi (8.3 lpm / 68 bar), 220V, 59Hz 143 lbs. (65kg)
- **47102** 1.1gpm / 2000psi (4.1 lpm / 138 bar), 115V, 60Hz 127 lbs. (57kg)
- **47103** 1.1gpm / 2000psi (4.1 lpm / 138 bar), 220V, 50Hz 127 lbs. (57kg)
- **47105** 2.2gpm / 2000psi (8.3 lpm / 138 bar), 115V, 60Hz 127 lbs. (57kg)

Accessories:

- 34052 Valve Kit
- 34053 Pump Seal Kit
- 34550 10' Suction Hose



TRIPLEX PLUNGER PUMP

Features: 3.5 gpm / 3000psi (13.25 lpm / 206 bar), 7.5hp 208/230V 3-phase, 60Hz motor


- **37210** On 2-wheeled cart with full perimeter cage 263 lbs. (120kg)

Accessories:

- 34056 Pump Seal Kit
- 34057 Valve Kit
- 34550 10' Suction Hose

HYDROSTATIC TEST PUMPS

CONTINUED

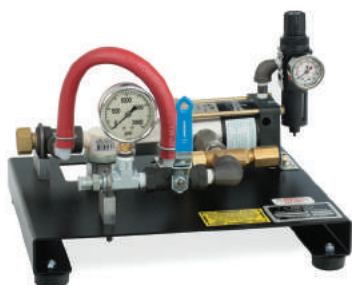

PNEUMATIC POWERED HYDROSTATIC TEST PUMPS

32150 Lightweight on a Steel Base. 31 lbs. (14kg)

Features: 1 gpm / 1500psi (3.7 lpm / 103 bar) 40-100psi @ 75 cfm required

32300 Lightweight on a Steel Base. 29 lbs. (13kg)

Features: 0.5 gpm/ 3,000psi (1.8 lpm / 206 bar) 40-100 psi @ 75 cfm required

32450 With full perimeter cage. 54 lbs. (24kg)

Features: 0.088gpm / 10,000psi (0.3 lpm / 689 bar) 100 psi @ 28 cfm required

Accessories:

- 32151 Fluid Section Repair Kit for 32150
- 32152 Air Section Repair Kit for 32150 and 32300
- 32301 Fluid Section Repair Kit for 32300
- 32451 Air Section Repair Kit for 32450
- 32452 Fluid Section Repair Kit for 32450



FIRE HOSE TESTERS

363020 Two Hose Tester - Electric. 162 lbs. (74kg)

Features: 3 gpm/500 psi, (11 lpm/35 bar), 115V, single-phase, 1 hp. capacitor motor, one (1) 2 1/2" NST swivel female quick fill inlet and two (2) 2 1/2" NST male outlets with individual ball valves. Cage mounted on swivel casters. Inlet and outlet hoses not provided.

363040 Four Hose Tester - Electric. 179 lbs. (81kg)

Features: 3 gpm/500 psi, (11 lpm/35 bar), 115V, single-phase, 1 hp. capacitor motor, one (1) 2 1/2" NST swivel female quick fill inlet and four (4) 2 1/2" NST male outlets with individual ball valves. Cage mounted on swivel casters. Inlet and outlet hoses not provided



363060 Four Hose Tester - Gas. 222 lbs. (101kg)

Features: 10 gpm/400 psi, (37.8 lpm/27 bar), 5.5hp Honda engine, one (1) 2 1/2" NST swivel female quick fill inlet and four (4) 2 1/2" NST male outlets with individual ball valves. Cage mounted on two-wheeled cart with solid tires.



VACUUM TEST ASSEMBLY

700536 1 lb. (0.45kg)

An easy way to check a trash pump for proper suction. Verify proper operation before putting a pump into service. Simply prime pump, place flat face over suction port and start pump.

TRASH PUMPS

Specifically designed pumps for heavy duty applications. Handles solids with ease and simple to open and clean. Standard roll cage protects pump and engine. Steel strainer for intake hose included. Available with either Briggs & Stratton Intek™ Pro or Honda Engines.



2" TRASH PUMPS

Features: 2" Suction / Discharge ports, 180gpm / 681 lpm, max solids up to 1"

- **56200** With 6.5hp B&S Engine (Caged)..... 100 lbs. (45.5kg)
- **56201** With 6.5hp B&S Engine on wheeled cart..... 140 lbs. (63.6kg)
- **562000** With 5.5hp Honda Engine (Caged)..... 100 lbs. (45.5kg)
- **562001** With 5.5hp Honda Engine on wheeled cart..... 140 lbs. (63.6kg)

Accessories:

- 56250 2" x 20' Suction Hose
- 56251 2" x 25' Discharge Hose
- 276270 Pump Repair Kit



3" TRASH PUMPS

Features: 3" Suction/ Discharge ports, 300gpm / 1135 lpm, max solids up to 1.25"

- **56300** With 6.5hp B&S Engine (Caged)..... 132 lbs. (60kg)
- **56301** With 6.5hp B&S Engine on wheeled cart 150 lbs. (68kg)
- **563000** With 5.5hp Honda Engine (Caged)..... 134 lbs. (61kg)
- **563001** With 5.5hp Honda Engine on wheeled cart..... 150 lbs. (68kg)

Accessories:

- 56350 3" x 15' Suction Hose
- 56351 3" x 25' Discharge Hose
- 276271 Pump Repair Kit



MUDSUCKER DIAPHRAGM STYLE TRASH PUMPS

Features: 3" Suction/Discharge ports, 90gpm / 340 lpm; for sewage, slurry, mud, thick liquids, max solids up to 1-5/8"

- **56310** With 6.5hp B&S Engine..... 179 lbs. (81kg)
- **563100** With 5.5hp Honda Engine..... 181 lbs. (82kg)

Accessories:

- 56350 3" x 15' Suction Hose
- 56351 3" x 25' Discharge Hose

ORDER NOW

Eastern Time 1-800-321-7950

Fax 440-992-2925

wheeler@wheelerrex.com



RATCH CUT TUBE AND PIPE CUTTERS

3590 RATCH CUT WITH METAL HANDLE

Uniquely designed for fast, accurate pipe cutting, especially in confined, nearly inaccessible locations. Suitable for use on mild or stainless steel, copper or thinwall PVC and CPVC tubing from 1/8" to 3/8" (3-9mm).

Weight 0.5 lbs. (0.23kg)
8040 Replacement Cutter Wheel



3790 RATCH CUT WITH METAL HANDLE

A larger version of our Model 3590 cutter described above. Use it for quick, precise cutting of mild or stainless steel, copper or thinwall PVC and CPVC tubing from 5/16" to 1 1/8" (8-27mm).

Weight 1.5 lbs. (0.68kg)
8041 Replacement Cutter Wheel
8044 Cutter Wheel for thin walled stainless steel



450 COPPER TUBE CLEANER

Cleans inside and outside 1/2" and 3/4" copper tubing. Leaves copper surface polished and cleaned for optimum solder flow. Replaceable high carbon steel bristles extend tool life beyond that of disposable brushes.

Weight 1 lb. (0.5kg)
452 Four Piece Replacement Brush Set



4506 6-IN-1 COPPER TUBE CLEANER

Cleans inside and out plus deburrs the inside diameter of 1/2" and 3/4" tubing with hardened steel reamer/deburrer.

Weight 1 lb. (0.5kg)
452 Four Piece Replacement Brush Set



AUTO-C TUBING CUTTERS

With it's C-shape, these cutters are easy to grip and do not require any swing space. Just turn the cutter in the direction of the arrow and the cut will be complete in seconds. The spring loaded cutter wheel self-feeds with consistent pressure. Cuts type-K, L and M copper and CTS CPVC.

5690 Auto-C Cutter 1/2" (15.9mm)..... 0.5 lb. (0.23kg)
5691 Auto-C Cutter 3/4" (22.2mm)..... 0.5 lb. (0.23kg)
5692 Auto-C Cutter 1" (28.6mm) 0.5 lb. (0.23kg)
8046 Replacement Cutter Wheel



4992 CLOSE QUARTERS TUBING CUTTER

Designed for plumbing remodeling, commercial boiler and air conditioning jobs, where standard cutters simply don't have the room. Cuts thin-wall material like traps and tailpieces with no distortion. Featuring a small swing radius of 3 - $\frac{5}{8}$ " , it's perfect for under vanities, waste and overflows, and close to walls. Eliminates sawing which can loosen joints. Cutter comes with cutter wheel (No. 8038 for non-ferrous materials. Also available is cutter wheel (No. 8033 to cut plastic). For $\frac{1}{4}$ " to 2 $\frac{3}{8}$ " (6-59mm) O.D. non-ferrous tube and plastic pipe and tube.

Weight	1.5 lbs. (0.7kg)
8038	Replacement Cutter Wheel for Copper
8033	Replacement Cutter Wheel for Plastic



MINI TUBING CUTTERS

For accurate cutting of copper, brass and aluminum tubing.

90721	For $\frac{1}{8}$ " to 1" (3-25mm) O.D.	0.3 lbs. (0.15 kg)
90727	For $\frac{1}{8}$ " to 1 $\frac{1}{8}$ " (3-30mm) O.D.	0.5 lbs. (0.22 kg)
8069	Replacement Cutter Wheel	



TELESCOPIC TUBING CUTTER

For accurate cutting of copper, brass and aluminum tubing. Telescopic cutter wheel feeding system keeps turning radius constant. Includes spare wheel. Swivel deburring tool retracts conveniently into the body.

90734	For $\frac{1}{8}$ " to 1 $\frac{3}{8}$ " (3-35mm) O.D.	0.8 lbs. (0.35 kg)
8069	Replacement Cutter Wheel	
80711	Replacement Deburring Blade	



TUBING CUTTER

Cuts copper, aluminum and thin wall material. Grooved roller allows for close to the flare cut. No tool required for fast wheel change. Ergonomic knob.

- 90710 For 1/8" to 1 1/8" (3-30mm) O.D. 0.8 lbs. (0.35kg)
 8069 Replacement Cutter Wheel



QUICK RELEASE TUBING CUTTER

Gives clean square cuts on copper, brass, aluminum tubing and thin walled conduit. Changing the cutter wheel allows plastic pipe to be cut. Tool includes two cutter wheels and swivel deburring tool which is stored conveniently in the body of the cutter.

- 90747 For 1/4" to 3" (6-76mm) O.D. 2 lbs. (.9kg)
 8069 Replacement Cutter Wheel
 8068 Replacement Cutter Wheel for Plastic
 80711 Replacement Deburring Blade



Gives clean, square cuts on plastic and non-ferrous metal pipe. Spring loaded cutter wheel feeding system allows slide-action size adjustment and quick release.

- 90748 For 2" to 5" (50-127mm) O.D. 4 lbs. (1.65kg)
 8066 Replacement Cutter Wheel for plastic
 8067 Replacement Cutter Wheel for non-ferrous metals
 90749 For 4" to 6 5/8" (100-168mm) O.D. 4 lbs. (1.8kg)
 8066 Replacement Cutter Wheel for plastic
 8067 Replacement Cutter Wheel for non-ferrous metals



STAINLESS STEEL TUBING CUTTERS

Specially designed for cutting stainless steel. All three models have a steel feed screw system and use specially designed cutter wheels with needle bearings for durability and longevity. No tools are required to change the cutter wheel and wheel pin.

- 90724 1/8" to 1 1/8" (3-30mm) O.D. Mini Tubing Cutter 0.5 lbs. (0.22kg)
 90730 1/8" to 1 3/4" (3-44.5mm) O.D. Tubing Cutter 0.9 lbs. (0.41kg)
 90764 1/4" to 3" (6.35-76.2mm) O.D. Tubing Cutter 2 lbs. (0.9kg)
 90799 Replacement Cutter Wheel



INNER & OUTER REAMER

For fast, clean, inner and outer reaming and outer deburring/beveling of $\frac{3}{8}$ "–2" copper and stainless steel tubing. Made of hardened steel construction.

50100 Inner/Outer Reamer $\frac{3}{8}$ "–2" (10mm–54mm) 1 lbs. (0.46 kg)



DEBURRING TOOL

Ideal for removing internal burrs in copper, plastic, aluminum and steel tubing. Features long lasting replaceable high speed steel blade and plastic handle with built-in pocket clip.

919 5 Pack of Deburring Tools 0.15 lbs. (0.06 kg)
921 10 Pack of Deburring Tools 0.6 oz. (0.17 kg)
925 50 Pack of Deburring Tools 1.45 oz. (0.65 kg)
80711 Replacement HSS Blade



4700 HAMMERHEAD FLARING TOOL

Four interchangeable heads flare $\frac{3}{4}$ "–2" type-K copper pipe. The 6 lb. slide hammer is easier and safer than regular hammers and the pressure-relieving heads allow flaring with water in the line. Complete with custom carrying case.

Weight18 lbs. (8kg)



4900 REROUNDING TOOL KIT

WHEELER-REX Rerounding Tools quickly and easily reround soft type-K copper tubing for proper seal when using compression fittings. For safety, use only with brass hammers. For $\frac{3}{4}$ " through 2" copper pipe, compact, divided kit makes transport easy.

Weight12 lbs. (5.4kg)

49075 $\frac{3}{4}$ " Rerounding Tool*1 lbs. (0.45kg)
49100 1" Rerounding Tool*1.6 lbs. (0.7kg)
49150 1 $\frac{1}{2}$ " Rerounding Tool*2.7 lbs. (1.2kg)
49200 2" Rerounding Tool*5.5 lbs. (2.5kg)

* Included in 4900 Tool Kit

4910 Brass Hammer4.5 lbs. (2kg)

REPLACEMENT CUTTER WHEELS

WHEELER-REX		RIDGID®		REED®	
METAL TUBING CUTTERS					
CUTTER WHEEL MODEL NO.	TUBING CUTTER MODEL NO.	CUTTER WHEEL MODEL NO.	TUBING CUTTER MODEL NO.	CUTTER WHEEL MODEL NO.	TUBING CUTTER MODEL NO.
8012	9290, 9291	E1240	10, 15, 20	OSS	TC1Q, TC1.6Q, TC2Q, T10, T15, T20
8015	9290, 9291	F158	10, 15, 20	0	TC1Q, TC1.6Q, TC2Q, T10, T15, T20
8021		E2191	30, 40, 106, 108, 109, 122, 133, 134, 136, 154, 156	30-40	TC3Q, TC4Q, TC5Q, TC6Q, TC8Q
8025	9490	E2558	30, 40, 106, 108, 109, 133, 134, 136, 154, 156	30-40	TC3Q, TC4Q, TC5Q, TC6Q, TC8Q
8034		E3469	101, 103, 104, 105, 117, 118, 131, 132, 150, 151, 152, 153, 205	345T	MC2
8038	4992, 4991, 4990				
8040	2590, 3590				
8041	3790				
8044 (SS)	3790				
8045	90722	E4546	105, 131, 132, 150 - 153, 205	R4546	MC2
8046	5690, 5691, 5692			SLRCW	TC50SL, TC75SL, TC1SL
8067	90748, 90749	E2558	30, 40, 106, 108, 109, 133, 134, 136, 154, 156	30-40	TC3Q, TC4Q, TC5Q, TC6Q, TC8Q
8069	90710, 90721, 90727, 90734, 90747	F158	10, 15, 20	0	TC1Q, TC1.6Q, TC2Q, T10, T15, T20
8071	90735, 90728, 90750			73505	TC14, TC166, MC3
90799 (SS)	90724, 90730, 90764				

PLASTIC TUBING CUTTERS					
8033	4992				
8037		E2156, E5299, E2157		3-6PVC	TC3Q, TC4Q, TC5Q, TC6Q
8066	90748, 90749		30P, 40P, 133P, 134P, 136P, 154P, 156P, 106, 109P	80P	TC6Q, TC8Q
8068	90747				
8073	90750			OP2	TC1Q, TC1.6Q, TC2Q, T10, T15, T20
8074	90751				
8075	90752				

PIPE CUTTERS					
8001	2690 (Steel)	F514, M-50, F3, F3S	1, 2, 42, 300, 50, 1A, 2A, 42A, 201, 202	2RBHD	2-1, 2-1Q, 2-4WG, 2-3, 2-3Q, 2-4
8003		E1032	300, 535, 1822-1, MACH	HX2, 1/2	
8004/8016	4690 (SS) Steel	FS229S			
8006		F367	6S, 208, 209	R367	
8039	5090				
8082	2690 (SS)				
700201	32900, 42900				

HINGED CUTTERS					
8050	95041, 95240			HS4	H4
8051	95041, 95240			HS4	H4
8052	95061, 95460			HS6	H6
8053	95061, 95081, 95121, 95460, 95680			HI6	H6, H8, H12
8054	95081, 95121, 95680			HS8-12	H8, H12
8076	95061, 95081, 95121, 95460, 95680			H6PSE5	H6, H8, H12

THREADING MACHINES	
60322	WHEELER-REX MODELS 6990, 6991, 7991, 8991
60324	WHEELER-REX MODELS 7890, 6090, 7090, 8090, 6190, 6290, 6390, 6490, 6790
60390	CUTTER BLADE FOR 6794 & 6590
60310	HSS CUTTER WHEEL FOR 6790, 6793
60301	HSS CUT-OFF BLADE FOR 6794 & 6590

RIDGID IS A REGISTERED TRADEMARK OF THE RIDGE TOOL CO.
REED IS A REGISTERED TRADEMARK OF THE REED MFG. CO.

GLASS TUBE CUTTERS

GLASS TUBE CUTTERS

For cutting glass tube and pipe as well as other brittle tubular materials. These tools are based on the original Wheeler "Squeeze and Pop" principle employing cutter wheels in the chain.



69012

For $\frac{1}{4}$ " thru $\frac{3}{4}$ " (6–18mm) O.D. gauge glass, laboratory glass, and porcelain tube. Small enough to carry in your pocket and almost as simple to use as a pair of pliers. Just wrap the chain around the tube, and hook the nearest chain pin in the jaw. Then a quick twist of the wrist, a slight squeeze of the handles, and pop!

Weight 1 lb. (0.45 kg)



79014

For $\frac{1}{4}$ " thru 1" (6–25mm) O.D. gauge glass, laboratory glass, and porcelain tube. Small enough to carry in your pocket and almost as simple to use as a pair of pliers. Just wrap the chain around the tube and insert it through the jaw. Then a quick twist of the wrist, a slight squeeze on the handles, and pop!

Weight 1 lb. (0.45 kg)



79022

For $\frac{1}{4}$ " thru $1\frac{1}{2}$ " (6–37mm) O.D. gauge glass, laboratory glass, and porcelain tube. Similar to the model 79014 except with a longer chain. Small enough to carry in your pocket and simple to use. Just wrap the chain around the tube and insert it through the jaw. Then a quick twist of the wrist, a slight squeeze on the handles, and pop!

Weight 1 lb. (0.45 kg)

REPLACEMENT GLASS CUTTER CHAIN

Part	Description	Length	No. of Pins
690012	Complete Chain for 69012 Glass Cutter	3" (75mm)	12
7914	Complete Chain for 79014 Glass Cutter	5 $\frac{1}{2}$ " (137mm)	14
7922	Complete Chain for 79022 Glass Cutter	8" (200mm)	22

ORDER NOW

Eastern Time 1-800-321-7950

Fax 440-992-2925

wheeler@wheelerrex.com

PROFESSIONAL SNIPPERS

WHEELER-REX Professional Snippers have been proven with years of professional use to be the snippers to have in your tool box. Durable and of high quality, with strong construction and long blade life, they are a must!



5190 SNIPPER

For 1/8" to 1 1/4" (3–31mm) O.D. soft plastic tubing and hose.

Weight 0.7 lb. (0.3kg)

5200 Replacement Blade

Blades are reversible for double life. Handles are die-cast aluminum — NOT plastic.



5191 WITH COATED BLADE

For 1/8" to 1 1/4" (3–31mm) O.D. soft plastic tubing and hose, and 1/2" and 3/4" (12–19mm) 160 lb. and 200 lb. PVC.

Weight 0.7 lb. (0.3kg)

5299 Replacement Blade

Blades are reversible for double life. Handles are die-cast aluminum — NOT plastic.



5291 RATCHET ACTION

For 1/8" to 1 5/8" O.D. (3–42mm) O.D. Schedule 40 Materials: PVC, ABS, vinyl, poly pipe and tubing. Ratchet style.

Weight 1 lb. (0.5kg)

5300 Replacement Blade



7291 RATCHET ACTION

For 1/8" to 2 7/16" O.D. (3–63mm) Schedule 40 Materials: Polyethylene, Polybutylene, Polypropylene, vinyl, PVC, and ABS pipe and tubing. Ratchet style. One hand operation.

Weight 1.25 lbs. (0.56kg)

7324 Replacement Blade

ECONOMY SNIPPERS

Need a snipper, but only for the occasional job? WHEELER-REX has an economical way for you to do just that and not spend a lot of money!



4190 MICRO SNIPPER

For 1/4" to 3/8" (6-9mm) O.D. soft plastic tubing and hose.

Weight 0.15 lb. (0.07kg)

Great for PVC supply lines!



5195 ECONOMY SNIPPER

For 1/8" to 1 1/4" (3-31mm) O.D. soft plastic tubing and hose.

Weight 0.7 lb. (0.3kg)

5196 Replacement Blade



5295 ECONOMY RATCHET ACTION

For 1/8" to 1 5/8" O.D. (3-41mm) Schedule 40 Materials: PVC, ABS, vinyl, poly pipe and tubing. Easy to use, anti-rust, anti-wear construction with a heat treated blade.

Weight 1 lb. (0.45kg)

5296 Replacement Blade



7325 BLADE SHARPENER

Quickly and easily restores the sharp edges on snipper blades. The WHEELER-REX blade sharpener only requires 3 or 4 strokes to properly put that sharp edge back to your blade.

Weight 0.35 lb. (0.16kg)



HAND SAWS

Two sizes with comfort fit handles: for plastic pipe and miscellaneous materials.
CUTS ON PUSH AND PULL STROKE.

- 600** 18" long blade (37mm).
Capacity: 1/2" to 6" (12–150mm) Sold in cartons of six or individually
- 601** With PTFE coated blade: 18" long (37mm).
Capacity: 1/2" to 6" (12–150mm) Sold in cartons of six or individually
- 602** 13" long blade (25mm).
Capacity: 1/2" to 3" (12–75mm) Sold in cartons of six or individually
- 603** With PTFE coated blade: 13" long (25mm).
Capacity: 1/2" to 3" (12–75mm) Sold in cartons of six or individually

Replacement Blades:

- 610** Replacement Blade for 600 Hand Saw sold in cartons of twelve or individually
Weight for carton 6 lbs. (2.7kg)
- 611** Replacement Blade for 601 Hand Saw sold in cartons of twelve or individually
Weight for carton 6 lbs. (2.7kg)
- 612** Replacement Blade for 600 Hand Saw sold in cartons of twelve or individually
Weight for carton 4 lbs. (1.8kg)
- 613** Replacement Blade for 603 Hand Saw sold in cartons of twelve or individually
Weight for carton 4 lbs. (1.8kg)



PVC AND ABS CABLE SAW

Cut PVC and ABS in tight places where other methods will not work. Simply slip the cable saw around the pipe and see-saw to quickly make a cut. Available in two lengths.

- 626** 26" Cable Saw 0.05lb.
- 636** 36" Cable Saw 0.05lb.



9015 HAND OPERATED PLASTIC PIPE BEVELER

The Universal Plastic Pipe Beveler makes a 15° bevel on SDR35 and Sch 40 thermoplastic pipe through 12" (300mm) capacity. It is lightweight and easy to adjust to different wall thicknesses for beveling and deburring. **Wide saddle won't twist and dig into the pipe like others.**

Capacity: 1 1/2" through 12" (38–300mm) Diameter

- Weight 5 lbs. (2.3kg)
- 220083** Replacement Bevel Blade



POWER OPERATED PLASTIC PIPE BEVELER

The power bevelers are designed for a wide variety of situations including high production applications. Our advanced HSS cutter design makes a smooth 15° bevel, which is adjustable for length and depth. Tools are easy to use and drastically reduces beveling time, especially on large pipe sizes or when doing production beveling.

- 9000** Capacity: 4" (100mm) and up. 115V, 1 3/4 hp., 11.0 amp motor,
24,500 RPM..... 15 lbs. (6.8kg)
- 9001** Model 9000 with Carbide Bit..... 15 lbs. (6.8kg)
- 220220** Beveler Unit less router (Includes 220234)
- 220234** Replacement HSS 15° Router Bit Assembly with 3/8" Shank and 1/2" Collet
- 220041** Replacement Carbide 15° Router Bit Assembly with 3/8" Shank and 1/2" Collet





PIPE HOG® PVC / ABS FITTING REAMER

Quickly and accurately bores out solvent welded fittings to make repairs. Fits 1/2" drill chuck. Saves time and material. Pays for itself in one use.

16150	1 1/2" Pipe Hog for Schedule 40.....	0.73 lbs.
16200	2" Pipe Hog for Schedule 40	0.9 lbs.
16300	3" Pipe Hog for Schedule 40	1.2 lbs.
16400	4" Pipe Hog for Schedule 40	1.8 lbs.
16010	Pipe Hog Kit with extension shaft.....	6 lbs.

Accessories:

700588	Schedule 80 Guide for 16150
700589	Schedule 80 Guide for 16200
700590	Schedule 80 Guide for 16300
700591	Schedule 80 Guide for 16400
16050	12" Extension Shaft
16055	1/2" Square Carbide Insert

Pat. No. 3,752,593



FITTING SAVER

Quickly and easily removes pipe from solvent welded fittings. Fits 3/8" drill chuck. Saves time and money over replacing whole assemblies. Perfect for plumbing, irrigation and sprinkler contractors.

Fitting Savers for Schedule 40

19050	1/2" IPS Fitting Saver.....	0.45 lbs.
19075	3/4" IPS Fitting Saver	0.5 lbs.
19100	1" IPS Fitting Saver.....	0.6 lbs.
19020	Sch 40 Fitting Saver Kit (contains 19050, 19075, 19100 Fitting Savers in case)....	1.8 lbs.

Fitting Savers for Schedule 80

19051	1/2" IPS Fitting Saver.....	0.45 lbs.
19076	3/4" IPS Fitting Saver	0.5 lbs.
19101	1" IPS Fitting Saver.....	0.6 lbs.
19025	Sch 80 Fitting Saver Kit (contains 19051, 19076, 19101 Fitting Savers in case)....	1.8 lbs.

19030	1/2" CTS Fitting Saver.....	0.45 lbs.
19035	3/4" CTS Fitting Saver.....	0.45 lbs.
277228	Carbide Cutting Insert	
277227	Screw for Insert	



BEFORE



Insert tool
into broken or
cut pipe



Begin
cutting
pipe



Continue until
proper depth
is obtained



AFTER

ORDER NOW

Eastern Time 1-800-321-7950

Fax 440-992-2925

wheeler@wheelerrex.com



INTERNAL PLASTIC PIPE CUTTERS

Make accurate, square cuts at floor level or in other blind locations. Cutters are easily preset for depth of cut and make their cuts in seconds. Recommended user supplied power source: 1/2" capacity, 350–450 RPM drill, rated at 4.6 to 6 amps.

For PVC and ABS plastic pipe. For individual pipe sizes from 1 1/2" to 6" Diameter.

1590	For 1 1/2" Schedule 40 pipe and DWV.	Weight	1 lbs.
2290	For 2" Schedule 40 pipe and DWV.	Weight	1.5 lbs.
2492	For 2" Schedule 80 pipe and DWV.	Weight	1.4 lbs.
3290	For 3" Schedule 40 pipe and DWV.	Weight	1.9 lbs.
3490	For 3" Schedule 80 pipe and DWV.	Weight	1.85 lbs.
4290	For 4" Schedule 40 pipe and DWV.	Weight	2.6 lbs.
4490	For 4" Schedule 80 pipe and DWV.	Weight	2.45 lbs.
6000	For 6" Schedule 40 pipe and DWV.	Weight	4.2 lbs.

Replacement Blades:

1293	Replacement Blade for Models 1590, 2290 and 2492
3293	Replacement Blade for Models 3290 and 3490
4293	Replacement Blade for Models 4290, 4490 and 6000
700777	6' Drive Shaft for 1 1/2"– 2" models
700778	6' Drive Shaft for 3", 4" and 6" models

Model	Adjustable Cutting Depth Range
1590 & 2290	1 5/8" – 8 1/4"
3290 & 3490	1 5/8" – 8 1/4"
4290 & 4490	1 5/8" – 11 5/8"
6000	2 3/8" – 12 3/4"



POLY PIPE CHAMFERING TOOL / DEPTH GAUGE

Lightly bevels the end of polyethylene pipe prior to socket fusion. The tool is sized to allow marking for the proper end distance for the cold ring per ASTM F1056.

10050	1/2" CTS.....	0.35 lbs.
10075	3/4" CTS.....	0.40 lbs.
10100	1" CTS	0.45 lbs.
10125	1 1/4" CTS	0.50 lbs.
10150	1 1/2" CTS	0.60 lbs.
10200	2" CTS	0.85 lbs.
30050	1/2" IPS.....	0.40 lbs.
30075	3/4" IPS.....	0.50 lbs.
30100	1" IPS.....	0.45 lbs.
30125	1 1/4" IPS	0.60 lbs.
30150	1 1/2" IPS	0.55 lbs.
30200	2" IPS.....	0.70 lbs.

700155	Replacement Blade for All Models
--------	----------------------------------



GUILLOTINE PIPE CUTTERS

892

Designed to cut water/sewer PVC pipe up to 4.0" (125mm) O.D. Comes standard with removable T-Handle design, which can be removed to expose a 1" Hex nut. Wide saddle side-swing opening design simplifies positioning at any point on pipe. This nut can also be driven with a ratchet and 1" socket.

Weight.....18 lbs. (8kg)

701149 Replacement V-Shaped Blade PTFE Coated

700692 Replacement Straight Blade PTFE Coated

6515 Ratchet

506032 Socket

1697

Designed to cut water/sewer PVC pipe up to 8.0" (225mm) O.D. Comes standard with removable T-Handle design, which can be removed to expose a 1" Hex nut. This nut can also be driven with a ratchet and 1" socket.

Weight.....46 lbs. (18kg)

701358 Stainless Steel V-Blade

6515 Ratchet

506032 Socket

1894

A unique approach to cutting large diameter water/sewer PVC pipes. Can be used with a low speed power drive (300–500 RPM maximum), that delivers power to the blade through a right angle worm drive. Power cutting at 300 RPM is a fast 1 minute per inch of pipe diameter and gives better cuts and longer blade life due to reduced flexing. Maximum cutting capacity of 13.2" (335mm) O.D.

Power source is not included.

Weight.....95 lbs. (43kg)

701454 Stainless Steel V-Blade

1897

A unique approach to cutting large diameter water/sewer PVC pipes. Comes standard with removable T-Handle design, which can be removed to expose a 1" Hex nut. This nut can also be driven with a ratchet and 1" socket. Maximum cutting capacity of 13.2" (335mm) O.D.

Weight.....102 lbs. (46.2kg)

701454 Stainless Steel V-Blade

6515 Ratchet

506032 Socket

All models come standard with V-shaped Blade. Straight Blade Optional.

Guillotine Style Pipe Cutter Features:

- Medium and high density PE pipe cutting capacity
- Coated steel cutter blade creates outstanding ease of cutting and corrosion protection
- Wide saddle side-swing opening design simplifies positioning at any point on pipe
- Wide saddle base provides sturdy, positive pipe support
- Stainless steel fasteners and hardware
- Structural members produced from aircraft-grade aluminum
- Dry-lube coated drive screw



Ratchet
(optional)



Power Driven
(1894 only)



T-Handle
(standard with 892, 1697 & 1897)

PIPE WORKING TOOLS



4160 TRIPOD VISE STAND

For 1/8"– 6" pipe capacity. Lightweight and portable with a large top working area. It features a built-in chain vise, pipe bending slots, pipe rest, ceiling brace screw and hardened replaceable jaws. The lower tray folds for extra convenience.

Weight50 lbs. (22kg)

606738 Replacement Chain

606739 Replacement Jaws



4180 BENCH VISE

This new heavy duty bench vise is ideal for a wide range of pipe working from 1/8" OD to 6" OD and features a reinforced steel chain and replaceable hardened jaws. Mounting bolts are included. It is ideal for a multitude of applications.

Weight19 lbs. (8.6kg)

600015 Replacement Chain

600016 Replacement Jaws



FOLDING TRIPOD PIPE SUPPORTS

Tripod Pipe Supports are designed to hold stock for threading machines, chop saws, and other equipment. Sturdy, all steel construction supports hold up to one ton (2000 lbs.) of materials: pipe, tubing, conduit, bar, rod, or structural steel. Quick-release locking ring allows for fast height adjustments, while 1 1/2" diameter Acme threads on the adjusting column provide fine height adjustments. Heavy duty lockscrew maintains height safely.

Height range is 27" - 50" (675–1250mm). Capacity: 1/2" - 16" (12–400mm) Diameter.

850 With standard V-head, Weight.....28 lbs. (13kg)

851 With heavy duty ball transfer head, Weight32 lbs. (14.5kg)

854 Ball Transfer Head only for use on standard V-head



850 Shown Collapsed





YOKE VISES

These vises firmly hold pipe and round bar stock for cutting, drilling, and threading operations. Vises are reversible for left or right opening. All jaws are made of hardened steel and can easily be replaced in the field. The yoke and base are constructed of high-grade malleable iron. Meets all Federal Specifications: GGG-V-415a Type 1, Class II.

Product	O.D. Capacity	Weight
13020	$\frac{3}{8}$ " - $2\frac{3}{8}$ " (60mm)	10 lbs. (4.5kg)
13040	$\frac{3}{8}$ " - $3\frac{1}{2}$ " (89mm)	18 lbs. (8kg)
13060	$\frac{3}{8}$ " - $4\frac{1}{2}$ " (114mm)	28 lbs. (12.7kg)
13080	$\frac{3}{8}$ " - 5" (127mm)	27 lbs. (12kg)



FLOOR MODEL PIPE VISES

WHEELER-REX Pipe Vises are designed to be portable and quickly assembled for field use, yet strong and tough enough for the shop. All models have a 2000 lb. (900kg) capacity. The quick releasing chain provides positive gripping power evenly around the pipe and prevents damage to pipe surfaces. Adjustments are fast to accommodate different pipe sizes.

400600	Capacity: $\frac{3}{4}$ " to 6" (18-150mm)	Weight.....51 lbs. (23.2kg)
401500	Capacity: $\frac{3}{4}$ " to 15" (18-375mm)	Weight.....54 lbs. (24.6kg)
402000	Capacity: $\frac{3}{4}$ " to 20" (18-500mm)	Weight.....55 lbs. (25kg)
402800	Capacity: $\frac{3}{4}$ " to 28" (18-700mm)	Weight.....56 lbs. (25.5kg)



PIPE PULLER

For joining all types of gasketed pipe: plastic, cast iron, clay, and concrete. Comes with two 12 ft. long anchor chains. Also pulls fittings, valves, and couplings into place. Lightweight yet rugged, this tool operates on a basic lever action and is used easily by one person.

4012	Pipe Capacity: 4" - 14" (100-350mm) Diameter	Weight.....33 lbs. (15kg)
------	--	---------------------------



PIPE DOLLY

These dollies are used to support, rotate and align pipes. They are extremely heavy duty with 1" (25mm) diameter axle shafts. All steel construction. Normally used in pairs.

880	Capacity: 3" - 30" (75-750mm) pipe, 2500 lb. load rating each	Weight.....23 lbs. (10.5kg)
-----	---	-----------------------------

SHUT OFF TOOLS FOR SOFT COPPER PIPE

Our shut off tools are invaluable for maintenance and installation of soft copper service lines where they can shut off, hold, and restore flow quickly and easily. They are handy for quick repairs with their swing-out design. Complete with socket, ratchet, holding clamp, and carrying case.

New & Improved — with Grease Fitting

- 85** Capacity: $\frac{3}{4}$ " (20mm) through 1" (25mm) soft copper tubing
Includes: ratchet, carrying case and #62 clamp.
Weight..... 12 lbs. (5.5kg)
- 86** Capacity: $\frac{1}{2}$ " (12mm) through 1" (25mm) soft copper tubing
Includes: ratchet, carrying case and #62 clamp.
Weight..... 13 lbs. (5.9kg)
- 70** Capacity: $1\frac{1}{4}$ " (31mm) through 2" (50mm) soft copper tubing
Includes: ratchet, carrying case and #72 clamp.
Weight..... 19 lbs. (8.6kg)
- 8570** Combination of Models 85 and 70
Includes: ratchet, carrying case and clamps.
Weight..... 26 lbs. (11.8kg)
- 8670** Combination of Models 86 and 70
Includes: ratchet, carrying case and clamps.
Weight..... 26 lbs. (11.8kg)

Accessories:

- 62** $\frac{1}{2}$ " (12mm) through 1" (25mm) Clamp for soft copper pipe
- 72** $1\frac{1}{4}$ " (31mm) through 2" (50mm) Clamp for soft copper pipe
- 6515** $\frac{1}{2}$ " Square Male Drive Ratchet
- 221220** Conversion Kit from 85 to 86
- 506032** 1"x $\frac{1}{2}$ " Square Drive Socket

SHUT OFF TOOLS FOR PLASTIC PIPE

These unique portable valves shut off the flow of either water or gas in Polyethylene or Polybutylene plastic pipe. They are especially handy for fast on-the-spot repairs. Complete with socket, ratchet, and carrying case.

- 75** Capacity: $\frac{3}{8}$ " to 2" (10–50mm) plastic water pipe.
Includes: ratchet and carrying case.
Weight..... 12 lbs. (5.4kg)
- 77** With adjustable stops to prevent damage to pipe.
Capacity: $\frac{3}{8}$ " to 2" (10–50mm) Plastic gas pipe.
Includes: ratchet and carrying case.
Weight..... 12 lbs. (5.4kg)



PIPE FREEZING KIT



ARCTIC POLAR SYSTEM® PIPE FREEZING KIT

Designed specifically for the professional, WHEELER-REX Pipe Freezing Kits will rapidly form an ice plug in static water lines eliminating the need to drain down a system to make a repair. Ice plugs will last 15 to 20 minutes and can be easily renewed.

Kit comes complete with jackets for double freezes. No tools are required to set up and complete a freeze. An easy-to-use scale is included to ensure economical operation. Packaged in a convenient carrying case.

Polar Spray is non-toxic, non-flammable and ozone friendly. (Tetrafloraethane)

TWO CAN PIPE FREEZING KIT

- 1755** $\frac{3}{8}$ "– $2\frac{3}{8}$ " O.D. Kit includes the following:
 2 jackets each – 17550 for $\frac{3}{8}$ "– $\frac{1}{2}$ ", 17551 for $\frac{5}{8}$ "– $\frac{7}{8}$ ", 17552 for 1"– $1\frac{3}{8}$ ",
 17553 for $1\frac{5}{8}$ ", 17554 for 2"– $2\frac{3}{8}$ ", valve, scale, t-fitting and 5' tubing.
 Weight.....11.5 lbs. (5.3kg)
- 17500** Polar Spray Replacement Canister *per can*2 lbs. (0.9kg)
 (Available in cases of 12 or individually)



REPLACEMENT CANISTERS



WHEELER-REX's Pipe Freeze Kits install in seconds on pipes up to $2\frac{3}{8}$ " O.D. and require no special tools. Ice plugs last 15–20 minutes and can be easily renewed.

ORDER NOW

Eastern Time 1-800-321-7950

Fax 440-992-2925

wheeler@wheelerrex.com


DRILLING AND TAPPING TOOLS



HOT TAPPING SYSTEM

Capacity: from 3/4" to 2" (19–50mm) in Steel, Cast Iron, Ductile, and Plastic Pipe. The WHEELER-REX Hot Tapping System is hand operated and designed for drilling holes in active water lines up to 250 psi. It is lightweight and easy for one person to set up and use. Complete with 6515 ratchet, tool box, adapters and cutter shells for making 3/4" (19mm) and 1" (25mm) holes. Adapters and cutter shells for over 1" do not come with standard kits and must be purchased separately.

Built-in bleed-off valve allows chips to be flushed away.

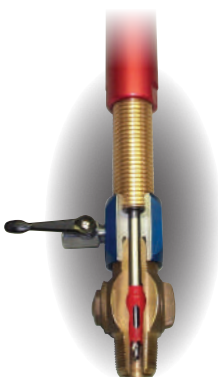

Cutaway View

Model 8100	Hot Tapping System for 3/4" & 1"	Steel & Copper
Complete with 3/4" and 1" NPT Adapters and HSS Cutters for steel and copper pipe.		
Model 8200	Hot Tapping System for 3/4" & 1"	Steel & Copper
Complete with 3/4" and 1" CTS Flare Adapters and HSS Cutters for steel and copper pipe.		
Model 8201	Hot Tapping System for 3/4" & 1"	Plastic
Complete with 3/4" and 1" CTS Flare Adapters and Cutter Shells for plastic pipe.		
Model 8202	Hot Tapping System for 3/4" - 2"	Plastic
Complete with 3/4", 1", 1-1/2", 2" CTS Flare Adapters and Cutter Shells for plastic pipe, includes large arbor assembly.		
Model 8203	Hot Tapping System for 3/4" & 1"	Ductile / Cast Iron
Complete with 3/4", 1" CTS Flare Adapters and Cutter Shells for ductile & cast iron pipe.		
Model 8204	Hot Tapping System for 3/4" - 2"	Ductile / Cast Iron
Complete with 3/4", 1", 1-1/2", 2" CTS Flare Adapters and Cutter Shells for ductile & cast iron pipe, includes large arbor assembly.		
Model 8205	Hot Tapping System for 3/4" & 1"	Plastic, Ductile & Cast Iron
Complete with 3/4", 1" CTS Flare Adapters and Cutter Shells for plastic and ductile & cast iron pipe.		
Model 8206	Hot Tapping System for 3/4" - 2"	Plastic, Ductile Iron & Cast Iron
Complete with 3/4", 1", 1-1/2", 2" CTS Flare adapters & Cutter Shells for plastic, ductile iron, cast iron, includes large arbor assembly.		
Model 8300	Hot Tapping System for 3/4" & 1" BSPT	Steel & Copper
Complete with 3/4" and 1" BSPT Adapters and HSS Cutters for steel & copper pipe.		

ADAPTERS FOR NPT THREAD	ADAPTERS FOR CTS FLARE	ADAPTERS FOR BSPT THREAD	COMPRESSION STYLE CORP STOP MUELLER 110	CUTTER SHELLS FOR STEEL AND COPPER	CUTTER SHELLS FOR DUCTILE IRON & CAST IRON	CUTTER SHELLS FOR PLASTIC C-900	OTHER ACCESSORIES
802051 3/4"	802050 3/4"	802071 3/4"	802060 1-1/2" ADAPTER	903071 3/4"	904065 3/4"	5800 3/4"	6515 RATCHET
802053 1"	802052 1"	802072 1"	802061 2" ADAPTER	903072 1"	904066 1"	5801 1"	908097 THREADED BUSHING
802055 1-1/4"	802054 1-1/4"	802073 1-1/4"		903073 1-1/4"	904067 1-1/4"	5803 1-1/4"	908094 CENTER DRILL
802057 1-1/2"	802056 1-1/2"	802074 1-1/2"		903074 1-1/2"	904068 1-1/2"	802084 1-1/2"	
802059 2"	802058 2"	802075 2"		903075 2"	904069 2"	802085 2"	

701440 1-1/2" & 2" ARBOR ASSEMBLY - HOT TAP SYSTEM ADAPTER

Reinforced Arbor for cutting larger holes in difficult materials. To be used with 1-1/2" and 2" cutter shells for all three WHEELER-REX hot tap systems. The new arbor design has drive pins that align with holes in the large cutter shells for a stronger assembly.

Weight.....2 lbs. (0.9kg)



COMBINED DRILL TAPS

WHEELER-REX's combined drill taps bring you premium performance at a reasonable price. Designed and manufactured to produce a quality thread and ensure a pressure tight fit. Made from high speed steel, they are tough and durable and fit all popular tapping machines.

WHEELER-REX Drill Taps will fit all popular tapping machines including:
Mueller B100 • Mueller B101 • Mueller A2 • Mueller A3 • Hays Transmate B1 • All Reed

89075	3/4" CC Thread Drill Tap	1.1 lbs.	(0.49kg)
89100	1" CC Thread Drill Tap	1.3 lbs.	(0.6kg)
86075	3/4" CC PVC Drill Tap	1 lb.	(0.45kg)
86100	1" CC PVC Drill Tap	1.5 lbs.	(0.68kg)
89150	1-1/2" Drill Tap	2.75 lbs.	(1.24kg)
89200	2" Drill Tap	3.85 lbs.	(1.74kg)

Resharpener service only available for WHEELER-REX CC Thread Drill Taps (not available for PVC Drill Taps).

TAPPING FLUID

A completely new concept in a lubricant for drill taps and other related uses where a non-toxic food grade lubricant is required. Slik-tap is easy to apply, yet thick enough to hang onto the cutting tool, providing the lubrication to reduce tapping effort and produce clean threads.

8900	1 pint of Tapping Fluid Slik-Tap	1.5 lbs.	(0.68kg)
8901	12 pack of 8900 Tapping Fluid Slik-Tap	14 lbs.	(6.35kg)

PORTABLE HOLE CUTTER SYSTEM

A compact, light-weight hole cutter system that utilizes a drill to cut a hole in pipes. Designed to cut most materials, including steel.

Without drill – provide your own:

3090	With adapter only for Milwaukee® Drill (less drill)	46 lbs.	(21kg)
3091	With adapter only for DeWalt® DW130V Drill (less drill)	46 lbs.	(21kg)

With drill:


3092	Hole Cutter System with Milwaukee® Model 1660-6 Drill	57 lbs.	(26kg)
3093	Hole Cutter System with DeWalt® DW130V Drill	57 lbs.	(26kg)
701173	Drill Adapter Kit for DeWalt® 131 Drill for all models	1 lb.	(0.5kg)

Accessories:

276436	2-Pin Arbor
908094	Center Drill

Features:

- Cuts holes up to 4 3/4" (120mm)
- For use with standard off-the-shelf hole saw **(not included)**
- Comes standard with metal carrying case
- Comes standard with enough chain for 10" pipes, extra chain available
- Handle can be changed for right or left feed
- Rack & pinion feed gear
- Fast, easy, secure mounting to pipe
- Spring loaded pin holds drill in position
- Comes complete and ready to use with either:
DeWalt® DW130V Drill or Milwaukee® 1660-6 Drill



DRILLING AND TAPPING TOOLS

CONTINUED



1661
PNEUMATIC



1660
GAS



1663
HYDRAULIC



701186
Bypass Valve



HOLE CUTTER SYSTEM

The WHEELER-REX Hole Cutter System is designed to easily cut holes from 4"-12" (100-300mm) into clay tile, ductile and cast iron, plastic and reinforced concrete pipes. The unit is available with a variety of power sources including 2-cycle gasoline engine, pneumatic motor, electric motor and hydraulic motor. The system is modular in design which allows a single operator to set up and perform non-pressure taps safely and quickly. The basic system can be used on pipes from 6"-20" (150-500mm) O.D. and the capacity can be extended by simply adding chain to the hold down mechanism. Set up normally takes 5-10 minutes and actual cutting time is 5-10 minutes depending on pipe material and wall thickness.

- 1660 Complete with gasoline power pack and water valve assembly
Shipping weight (less cutter shells)..... 108 lbs. (49kg)
- 1661 Complete with air power pack and water valve assembly, 70-80 psi (4.6-5.5 bar),
50-60 cfm (1400-1700 lpm) Shipping weight (less cutter shells)..... 123 lbs. (55.9kg)
- 276582 Air Motor Repair Kit
- 1662 Complete with 115V electric motor and water valve assembly
Shipping weight (less cutter shells)..... 102 lbs. (46kg)
- 1663 Complete with hydraulic motor and water valve assembly, 8 gpm, 2000 psi
(30 lpm @ 130 bar) Shipping weight (less cutter shells)..... 100 lbs. (45.45kg)
Requires external hydraulic source. See page 9 for Model 6500 Hydraulic Power Pack
- 1664 Hole Cutter System less drive 93 lbs. (43kg)
- 701186 Bypass Valve for 1663 Hole Cutter System 8 gpm, 2000 psi..... 10.5 lbs. (4.7kg)

The Model 701186 is a Bypass Valve Kit designed to be used with your skid loader, backhoe or tractor for the WHEELER-REX Model 1663 Hydraulic Hole Cutter System. The 701186 will adapt your current hydraulic system to the specs required to operate the 1663 Hole Cutter System. (8 gpm and 2000 psi required) Portable at 10 pounds and easy to connect. The hole cutter's hydraulic lines will directly attach to the quick disconnects for both input & output points on the bypass valve. Hydraulic lines not included (between hydraulic power source & bypass valve.)

- 210 HSS Center Drill for CI, DI & Plastic Pipe
- 211 Carbide-Tipped Center Drill for Clay and Concrete
- 220025 Coupon Retainer

HOLE CUTTER SHELLS

Nominal Hole Size	Clay Concrete	Reinforced Concrete, Clay, Ductile & Cast Iron	Plastic
4" (100mm)	3395*	6395*	4395
4 1/2" (112mm)	3450*	6450*	4450
6" (150mm)	3595*	6595*	4595
6 1/2" (172mm)	3650*	6650*	4650
8" (200mm)		6800*	4800

* Water coolant required

Larger sizes available upon request


EARTHWORM HYDRO-DRILL


Bores holes underground without trenching or disturbing surface materials. Ideal for installing water, gas, drain, and electrical lines. Comes standard with a combination drive/water valve assembly, and a 2" (50mm) diameter auger. User supplies 3/4" pipe for drill shaft.

- 7800 Weight 3.65 lbs. (1.65kg)

Additional Augers

- 7801 1" (25mm) Auger
- 7802 2" (50mm) Auger
- 7810 3" (75mm) Auger
- 7808 4" (100mm) Reversing Auger
- 7809 6" (150mm) Reversing Auger





Poly/Copper Pipe Pulling Attachments



Poly Pipe Pulling Attachments



Copper Flare Locknut



Mini Pipe Slice



PIPE SLICES

8600 PIPE SLICE with 1" NPT Male Thread, 3 Blades, Tapered Thread...3 lbs. (1.4kg)

Splits $\frac{3}{4}$ " to 1" poly pipe and copper or pulls out $\frac{3}{4}$ " – 2" lead or galvanized services.

Accessories:

8605	$\frac{3}{8}$ " x 50' Cable with Ferrule.....	16 lbs.	(7.5kg)
8606	$\frac{3}{8}$ " x 75' Cable with Ferrule.....	22 lbs.	(10kg)
8607	$\frac{3}{8}$ " x 100' Cable with Ferrule.....	28 lbs.	(12.7kg)
8608	$\frac{3}{8}$ " x 150' Cable with Ferrule.....	37 lbs.	(16.8kg)
8611	Cable Grip	7 lbs.	(3kg)
8625	$\frac{3}{4}$ " Poly/Copper Pipe Pulling Attachment.....	2 lb.	(0.9kg)
8626	1" Poly/Copper Pipe Pulling Attachment.....	2 lb.	(0.9kg)

Kits:

8627	Includes 8600 Pipe Slice, 8605 50' Cable/Ferrule, 8611 Grip	25 lbs.	(11.4kg)
8628	Includes 8600 Pipe Slice, 8606 75' Cable/Ferrule, 8611 Grip	31 lbs.	(14kg)
8629	Includes 8600 Pipe Slice, 8607 100' Cable/Ferrule, 8611 Grip	38 lbs.	(17.3kg)
8630	Includes 8600 Pipe Slice, 8608 150' Cable/Ferrule, 8611 Grip	46 lbs.	(21kg)

8601 PIPE SLICE II with $1\frac{1}{2}$ " – 12 Straight Thread, Single Blade..... 2.5 lbs. (1.2kg)

Splits $\frac{3}{4}$ " to 1" poly or copper pipe or pulls out 1" lead or galvanized services.

Accessories:

8605	$\frac{3}{8}$ " x 50' Cable with Ferrule.....	16 lbs.	(7.5kg)
8606	$\frac{3}{8}$ " x 75' Cable with Ferrule.....	22 lbs.	(10kg)
8607	$\frac{3}{8}$ " x 100' Cable with Ferrule.....	28 lbs.	(12.7kg)
8608	$\frac{3}{8}$ " x 150' Cable with Ferrule.....	37 lbs.	(16.8kg)
8611	Cable Grip	7 lbs.	(3kg)
8645	$\frac{3}{4}$ " PE Pipe Pulling Attachment.....	2 lb.	(0.32kg)
8646	1" PE Pipe Pulling Attachment	2 lb.	(0.37kg)
8648*	$\frac{3}{4}$ " Copper Flare Locknut	1 lb.	(0.25kg)
8649*	1" Copper Flare Locknut	1 lb.	(0.21kg)
8647	$\frac{3}{4}$ " and 1" Double Flare Tool	2 lb.	(0.24kg)

Kits:

8620	Includes 8601 Pipe Slice II, 8605 50' Cable/Ferrule, 8611 Grip.....	25 lbs.	(11kg)
8621	Includes 8601 Pipe Slice II, 8606 75' Cable/Ferrule, 8611 Grip.....	31 lbs.	(14kg)
8622	Includes 8601 Pipe Slice II, 8607 100' Cable/Ferrule, 8611 Grip.....	38 lbs.	(17kg)
8623	Includes 8601 Pipe Slice II, 8608 150' Cable/Ferrule, 8611 Grip.....	46 lbs.	(22.5kg)
8640	Includes 8601 Pipe Slice II, 8645 & 8646 PE Pulls, 8648 & 8649 Copper Locknut, 8647 Flare Tool.....	7 lbs.	(3.0kg)
8641	Includes 8601 Pipe Slice II, 8645 & 8646 PE Pulls.....	5 lbs.	(2.3kg)
8642	Includes 8601 Pipe Slice II, 8648 & 8649 Copper Locknut, 8647 Flare Tool.....	5 lbs.	(2.7kg)

*New Fittings for Copper Pipe:

Copper Connections: Simply slide the locking nut over the pipe, flare it and then slide the locking nut up and thread onto the back of the Pipe Slice II. The Pipe Slice II now has a radius at the back end to assist in securing the pipe to the tool.

8500 MINI PIPE SLICE for $\frac{1}{2}$ " to $\frac{3}{4}$ " lines with $\frac{1}{2}$ " NPT Male Thread.....1 lb. (0.5kg)

Accessories:

8506	$\frac{1}{4}$ " x 50' Cable and Ferrule	8 lbs.	(2.7kg)
8507	$\frac{1}{4}$ " x 75' Cable and Ferrule	11 lbs.	(4.1kg)
8508	$\frac{1}{4}$ " x 100' Cable and Ferrule	13 lbs.	(5.4kg)
8525	$\frac{1}{2}$ " – $\frac{3}{4}$ " Poly Pipe Pull Attachment.....	1 lbs.	(2.7kg)

Kits:

8520	Includes 8500 Mini Slice, 8506 50' Cable, 8611 Cable Grip	15 lbs.	(9kg)
8521	Includes 8500 Mini Slice, 8507 75' Cable, 8611 Cable Grip	18 lbs.	(12kg)
8522	Includes 8500 Mini Slice, 8508 100' Cable, 8611 Cable Grip	21 lbs.	(13.6kg)

Other cable lengths available upon request.

VALVE EXERCISERS



VALVEMASTER PORTABLE VALVE EXERCISER

ValveMaster portable valve exerciser delivers 0–600 ft. lbs. of torque with finger tip control. All torque absorbed by frame to protect the operator. Standard features include digital counter, 2" ball hitch coupling, 4.80 x 12" wheels and auxiliary connections for use as hydraulic power source for other tools.

(Type II 8 gpm, 2000 psi) 8 ft telescoping key included

98001 With Honda engine 512 lbs. (233kg)

98003 With Honda engine and reversible counter..... 510 lbs. (232kg)

Note: 8 foot is the maximum key length recommended for optimal performance.



VALVE EXERCISER / POWER DRIVE

The 68 series valve exerciser offers high performance in a compact, lightweight package. A wide variety of adapters are available for multiple uses. 115V, 1/2 hp., 6 amps, 250 ft. lbs., 22 RPM.

68115 Power Drive only – For use with adapters below 22 rpm.35 lbs. (15.90kg)
Other voltages may be available upon request.

681150 Power Drive with 13964, 22 rpm.....45 lbs. (20.45kg)

681155 Rising Stem Valve Operator with counter, clutch and hand wheel adapter
Weight62 lbs. (28.1kg)

68315 Power Drive Only, 66 rpm

683155 Power Drive with 13968 and 13970, 66 rpm


13964 Torque Limiting Adapter with counter and 1" square drive. 0-250 ft. lbs.
Weight8 lbs. (3.6kg)

10709 1" Square Female Adapter
Weight3 lbs. (1.4kg)

10696 Adapter for 12R drop head dies
Weight2 lbs. (0.9kg)

701061 Electric Counter Assembly
Weight1.5 lbs. (.65kg)

21389 Torque Limiting Adapter with 1" Square Drive, 2-250 ft. lbs.
Weight8 lbs. (3.6kg)

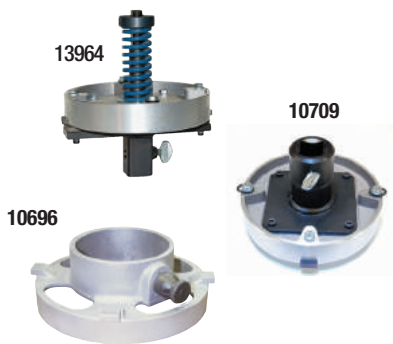

681150 in use




13968 RISING STEM TORQUE ADAPTER

Features:

- Clutch "slips" to keep operator and valve safe while exercising.
- Torque Specs: adjustable 0 – 200 ft.lbs.
- Unique clutch system allows you to set the torque accordingly, to exercise valves without exceeding their limit.
- Clutch can be easily adjusted with any $\frac{3}{4}$ " wrench. (Not included)
- Control Rods have graduations for approximate ft.lbs. of torque.
- To be used with the 13970 on rising stem valves.
- The 701061 counter assembly can be added to the 68115 and the 13970 for ease of valve revolution counting.
- Clutch is allowed to "slip" and keep correct count when using the 701061 counter assembly.

Weight10 lbs. (4.5kg)



13970 HAND WHEEL ADAPTER

Features:

- Adapts to valves with hand wheels with or without rising stems up to 3" in diameter.
- Series of bolt holes to adapt to many different spoke patterns and styles available.
- Allows you to exercise the valve with ease by using the 68115 with the addition of a 13968 Rising Stem Torque Adapter.
- The 701061 counter assembly can be added to the 68115 and the 13968 for ease of valve revolution counting.

Weight12 lbs. (5.45kg)



10700 HYDRANT NUT

A convenient 1" square drive adapter designed for most hydrants. Use it with a portable power drive or with a T-Handle Key. It reduces worker fatigue when used with the WHEELER-REX 68115 Power Drive. Can also use the WHEELER-REX 8806 or 8808 Telescoping Valve Keys.

Machined and fabricated steel construction, adjustable to a variety of pentagon nut up to a 1- $\frac{3}{4}$ ". A $\frac{3}{4}$ " jam bolt is included.

Weight6 lbs. (2.7kg)

VALVE KEYS

8806 6 FT. TELESCOPING VALVE KEY

Packed into a convenient 24" carrying case. Quick disconnect pull pins make adjustments fast and easy. Both a manual handle and a 1" square power adapter are included. 2" square female drive fits most standard valves. Telescopes to 6 ft.20 lbs. (9kg)

8808 8 FT. TELESCOPING VALVE KEY

Packed into a convenient 24" carrying case. Quick disconnect pull pins make adjustments fast and easy. Both a manual handle and a 1" square power adapter are included. 2" square female drive fits most standard valves. Telescopes to 8 ft.23 lbs. (10.5kg)

88024 2 FT. EXTENSION

To extend your 8806 6' key into an 8808 8' key5.5 lbs. (2.5kg)



WRENCHES, PLIERS & FASTENING TOOLS

Heavy Duty Iron Pipe Wrenches have I-Beam handles for proven strength and durability without excess weight. Full floating jaws have spring suspension for fast grip and release. Replaceable jaws are made of tough heat-treated alloy steel. Aluminum Wrenches are nearly 50% less weight compared to Iron Wrenches. The End Wrenches and the Off-Set Wrenches allow for usage in areas with space restrictions. All Pipe Wrenches are made to U.S. Federal Specifications. Parts are interchangeable with most major brands and carry a limited lifetime warranty.

HEAVY DUTY STRAIGHT IRON PIPE WRENCHES

Manufactured to U.S. Specifications GGG-W-651e Type II Class A



Model Number	Description	Pipe Capacity		Weight		Std Pack
		Inches	mm	Lbs	Kg	
4508	8" (200mm) Straight Pipe Wrench	1	25	$\frac{3}{4}$	0.3	6
4510	10" (250mm) Straight Pipe Wrench	1 1/2	40	1 3/4	0.8	6
4512	12" (300mm) Straight Pipe Wrench	2	50	2 3/4	1.2	6
4514	14" (350mm) Straight Pipe Wrench	2	50	3 1/2	1.6	6
4518	18" (450mm) Straight Pipe Wrench	2 1/2	65	5 3/4	2.6	6
4524	24" (600mm) Straight Pipe Wrench	3	80	9 3/4	4.4	4
4536	36" (900mm) Straight Pipe Wrench	5	125	19	8.7	1
4548	48" (1200mm) Straight Pipe Wrench	6	150	34	15.5	1
4560	60" (1524mm) Straight Pipe Wrench	8	200	51 1/4	23.3	1

HEAVY DUTY END IRON PIPE WRENCHES

Manufactured to U.S. Specifications GGG-W-651e Type VI



Model Number	Description	Pipe Capacity		Weight		Std Pack
		Inches	mm	Lbs	Kg	
4710	10" (250mm) End Pipe Wrench	1 1/2	40	1 3/4	0.8	6
4714	14" (350mm) End Pipe Wrench	2	50	3 1/2	1.6	6
4718	18" (450mm) End Pipe Wrench	2 1/2	65	5 3/4	2.6	3

ALUMINUM STRAIGHT PIPE WRENCHES

Manufactured to U.S. Specifications GGG-W-651e Type II Class C



Model Number	Description	Pipe Capacity		Weight		Std Pack
		Inches	mm	Lbs	Kg	
4410	10" (250mm) Aluminum Straight	1 1/2	40	1	0.4	6
4414	14" (350mm) Aluminum Straight	2	50	2 1/2	1.1	6
4418	18" (450mm) Aluminum Straight	2 1/2	65	3 3/4	1.7	6
4424	24" (600mm) Aluminum Straight	3	80	6	2.7	6
4436	36" (900mm) Aluminum Straight	5	125	11	5	4
4448	48" (1200mm) Aluminum Straight	6	150	19	8.7	1

ALUMINUM OFF-SET PIPE WRENCHES

Manufactured to U.S. Specifications GGG-W-651 Type II Class C



Model Number	Description	Pipe Capacity		Weight		Std Pack
		Inches	mm	Lbs	Kg	
4814	14" (350mm) Aluminum Off-Set	2	50	2	0.9	6
4818	18" (450mm) Aluminum Off-Set	2 1/2	65	3 1/2	1.6	6
4824	24" (600mm) Aluminum Off-Set	3	80	5	2.3	6



GRIPMASTER

The GripMaster is a one-handed operation wrench which provides a fast, secure grip. Spring-loaded jaws for fast placement on pipe and secure ratchet action.

Model Number	Description	Pipe Capacity		Weight		Std Pack
		inches	mm	lbs	kg	
4310	10" GripMaster	1 1/2	37.5	2	0.9	6
4314	14" GripMaster	2	50	4	1.8	6



SPUD WRENCH

The 4612 Spud Wrench is for 3/8"-2 5/8" pipes and is designed with narrow jaws to fit into small spaces. The smooth jaws are the perfect tool when toothed jaws may not be the right choice for the job.

Model Number	Description	Pipe Capacity		Weight		Std Pack
		inches	mm	lbs	kg	
4612	12" Spud Wrench	2 5/8	67	2.7	1.2	6



DOUBLE-UP WRENCH

One through-bolt wrench with two sockets makes for fast, easy tightening of your repair clamp and service saddle nuts. Easy reversing with a single lever. Strong, all steel construction with a vinyl grip.

9600	1 1/4" x 1 1/16" Double-Up Wrench	2.75 lbs.
9601	1 5/16" x 1 1/8" Double-Up Wrench	2.75 lbs.



HEAVY DUTY DEEP SOCKETS

Designed for tightening hex nuts on repair clamps, mechanical joint fittings, and saddles. Large diameter barrels make fast hand tightening easy. Operates with any 1/2" drive manual or impact wrench. Twelve individual kits are available.

Individual Six Point Deep Sockets

978	3/4"	Deep Socket 6 pt.	1 lbs.	(0.5kg)
979	7/8"	Deep Socket 6 pt.	1 lbs.	(0.5kg)
980	1 5/16"	Deep Socket 6 pt.	1.2 lbs.	(0.5kg)
981	1 1/16"	Deep Socket 6 pt.	1.4 lbs.	(0.6kg)
982	1 1/4"	Deep Socket 6 pt.	1.5 lbs.	(0.7kg)
983	1 1/8"	Deep Socket 6 pt.	1.5 lbs.	(0.7kg)
984	1 5/16"	Deep Socket 6 pt.	1.85 lbs.	(0.8kg)
985	1 7/16"	Deep Socket 6 pt.	2.15 lbs.	(1kg)
986	1"	Deep Socket 6 pt.	1.2 lbs.	(0.5kg)
987	1 1/2"	Deep Socket 6 pt.	2.3 lbs.	(1kg)
947	17mm	Deep Socket 6 pt.85 lbs.	(0.4kg)
943	19mm	Deep Socket 6 pt.95 lbs.	(0.4kg)
944	22mm	Deep Socket 6 pt.	1.05 lbs.	(0.5kg)
945	24mm	Deep Socket 6 pt.	1.15 lbs.	(0.5kg)
948	27mm	Deep Socket 6 pt.	1.4 lbs.	(0.6kg)
946	30mm	Deep Socket 6 pt.	1.55 lbs.	(0.7kg)

Kits Available with Deep Sockets in Tool Box with 6515 Ratchet as Follows:

960	Includes 980 - 1 5/16", 981 - 1 1/16", 982 - 1 1/4"	7.75 lbs.	(3.5kg)
961	Includes 980 - 1 5/16", 981 - 1 1/16", 982 - 1 1/4", 983 - 1 1/8"	9 lbs.	(4kg)
962	Includes 980 - 1 5/16", 982 - 1 1/4", 983 - 1 1/8"	7.75 lbs.	(3.5kg)
963	Includes 981 - 1 1/16", 982 - 1 1/4", 984 - 1 5/16", 985 - 1 7/16"	13 lbs.	(5.9kg)
964	Includes 981 - 1 1/16", 982 - 1 1/4", 983 - 1 1/8"	8 lbs.	(3.6kg)
965	Includes 979 - 7/8", 981 - 1 1/16", 982 - 1 1/4"	7.6 lbs.	(3.45kg)
966	Includes 978 - 3/4", 979 - 7/8", 980 - 1 5/16", 981 - 1 1/16"	8 lbs.	(3.6kg)
967	Includes 978 - 3/4", 979 - 7/8", 980 - 1 5/16", 981 - 1 1/16", 982 - 1 1/4", 983 - 1 1/8", 984 - 1 5/16", 985 - 1 7/16", 986 - 1", 987 - 1 1/2"	20 lbs.	(9kg)

Kits with Deep Sockets in Metric Sizes:

940	Includes 943- 19mm, 944- 22mm, 945- 24mm	7 lbs.	(3kg)
941	Includes 943- 19mm, 944- 22mm, 945- 24mm, 946- 30mm	8 lbs.	(3.6kg)
942	Includes 947- 17mm, 943- 19mm, 945- 24mm, 946- 30mm	20 lbs.	(9kg)
950	Includes 947- 17mm, 943- 19mm, 944- 22mm, 945- 24mm, 948- 27mm, 946- 30mm	13 lbs.	(5.9kg)



WRENCHES, PLIERS & FASTENING TOOLS

CONTINUED



Replaceable Socket

SOIL PIPE COUPLING TORQUE WRENCH

This durable "T-Handle" type torque tool with a contoured comfort-fit handle features a removable socket and a unique locking collar, which allows the tool to be used as an untorqued snug-up or back-off, as well as a conventional torque tool. With the locking collar retracted, the tool torques to the right (tightening), while ratcheting to the left. When proper torque value has been achieved, the mechanism slips internally and over-tightening is impossible.

1977 T-Torque for tightening $\frac{5}{16}$ " coupling nuts to 60 in. lbs. Weight 1 lb. (0.5kg)

1980 T-Torque for tightening $\frac{5}{16}$ " coupling nuts to 80 in. lbs. Weight 1 lb. (0.5kg)

1981 T-Torque for tightening $\frac{3}{8}$ " coupling nuts to 80 in. lbs. Weight 1 lb. (0.5kg)

1982 T-Torque for tightening $\frac{5}{16}$ " & $\frac{3}{8}$ " coupling nuts to 80 in. lbs. Weight 1 lb. (0.5kg)

275410 $\frac{5}{16}$ " Replacement Socket

275818 $\frac{3}{8}$ " Replacement Socket



NO-HUB® COUPLING WRENCHES

WHEELER-REX powered No-Hub® Coupling Wrenches tighten or loosen couplings in just a few seconds. The tools can be used with most $\frac{3}{8}$ " reversible electric drills. They can be installed and removed as quickly as a drill bit. Automatic clutch in torque heads prevent over and under tightening. Recalibration is easy with a torque wrench.

1964 "Fastite" for tightening $\frac{5}{16}$ " coupling nuts to 60 in. lbs. Weight 0.8 lb. (0.36kg)

1965 "Fastite Plus" for tightening $\frac{3}{8}$ " coupling nuts to 80 in. lbs. Weight 0.8 lb. (0.36kg)

1966 "Fastite Plus 2" for tightening $\frac{5}{16}$ " coupling nuts to 80 in. lbs. Weight 0.8 lb. (0.36kg)



BASIN WRENCH

Quickly & easily tightens or loosens faucet shank nuts in close quarters. Complete with spring loaded jaws and a friction plug that helps hold the head in position. $\frac{3}{8}$ " to $1\frac{1}{4}$ " capacity.

9401 Basin Wrench 2 lbs. (0.9kg)



STRAP WRENCHES

Provides quick gripping to plastic or chrome plated objects without scratching or damaging the surface. Neoprene Coated Strap. Ductile iron handles for high strength.

Model No.	Pipe capacity	O.D. Capacity	Handle Length
8312	$\frac{1}{8}$ "–2" (10–63mm)	$\frac{1}{8}$ "–3 $\frac{1}{2}$ " (10–90mm)	12" (305mm) weight 2.0 lbs.
8318	1"–5" (33–127mm)	1"–6" (33–150mm)	18" (458mm) weight 3.3 lbs.
8324	2"–12" (60–324mm)	2"–14" (60–350mm)	24" (610mm) weight 5.7 lbs.
83120	Replacement Strap for 8312	83121	Replacement Wedge for 8312
83180	Replacement Strap for 8318	83181	Replacement Wedge for 8318
83240	Replacement Strap for 8324	83241	Replacement Wedge for 8324





ALUMINUM VALVE WHEEL WRENCHES

Designed to provide leverage to turn a valve wheel without slipping. Made from aluminum to be light weight and non-sparking. Three convenient sizes for added leverage.

8708	8" Length ($\frac{3}{4}$ " Mouth Opening) Weight.....	.03 lb. (0.13kg)
8714	14" Length (1" Mouth Opening) Weight	1 lb. (.45kg)
8718	18" Length ($1\frac{3}{8}$ " Mouth Opening) Weight.....	2.5 lbs. (1.1kg)



HYDRANT WRENCH

For removing hydrant caps and operating hydrants. Made of sturdy forged construction; will fit pentagon nuts up to $1\frac{3}{4}$ " or square nuts up to $1\frac{1}{4}$ " with spanners for either pin or lug style host couplings.

8700	Hydrant Wrench	5 lbs. (2.5kg)
-------------	----------------------	----------------



5400 LIGHT DUTY CHAIN WRENCH

With forged alloy steel handles, the 5400 is ideal for use in small locations. The 5400 is designed for pipes up to 4" O.D. Chain length is $15\frac{3}{4}$ "; handle length is 12".

Weight.....	2.5 lbs. (1.2kg)
-------------	------------------

CRIMPING TOOLS

WHEELER-REX introduces a line of crimping tools specifically designed to help install better connections on PEX potable water or radiant heating systems. The full circle crimp eliminates the unsightly appearance of tool marks and distortion of crimped rings.

89202 1/2" PEX RING CRIMPER

A PEX Ring Crimper for 1/2". Crimps conform to ASTM specifications and is supplied with a go/no-go gauge. Complete with a soft, comfortable grip. OAL 12"

Weight4 lbs. (1.8kg)

89203 3/4" PEX RING CRIMPER

A PEX Ring Crimper for 3/4". Crimps conform to ASTM specifications and is supplied with a go/no-go gauge. Complete with a soft, comfortable grip. OAL 12"

Weight4 lbs. (1.8kg)

89204 1" PEX RING CRIMPER

A PEX Ring Crimper for 1". Crimps conform to ASTM specifications and is supplied with a go/no-go gauge. Complete with a soft, comfortable grip and long handles for extra leverage. OAL 19"

Weight6 lbs. (2.7kg)

89206 1/2" AND 3/4" PEX COMBO CRIMPER

A Combination Pex Ring Crimper for 1/2" and 3/4". Crimps conform to ASTM specifications and is supplied with a go / no-go gauge. Complete with a soft, comfortable grip and long handles for extra leverage. OAL 16"

Weight5.4 lbs. (2.5kg)

STAINLESS CLAMP PINCHER RATCHET TOOL

The PEX Stainless Clamp Pincher Ratchet Tool with a full cycle mechanism assures consistent water tight crimps, eliminating the need for a crimp gauge. Made from heat treated steel for strength and durability. Its compact design and lightweight frame allow this tool to be extremely versatile when used in confined areas.

Our PEX Stainless Clamp Pincher ratchet tool can be used for 3/8", 1/2", 3/4" and 1". Crimps conform to ASTM F2098 specifications. OAL 11"


89250 Stainless Clamp Pincher, weight..... 2 lb. (0.9kg)

PEX RING REMOVER

This unique tool is designed for fitting recovery without damaging the fittings. The high mechanical advantage makes shearing of rings much easier and faster than sawing off a crimped ring. Just two cuts on the ring allow the user to reclaim the fitting. Saves time and money!

89210 1/2"-1" Ring Remover, weight1.2 lbs. (0.54kg)


892100 Replacement Cutting Blade

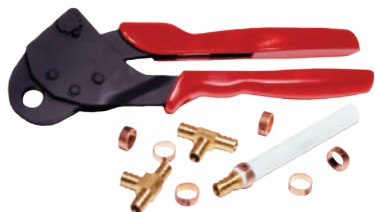

CLOSE QUARTERS CRIMP TOOLS

A unique tool designed for 1/2" and 3/4" pipe sizes. These tools provide a toggle action, which helps to assure a complete crimp cycle. Lightweight with a comfort fit handle, its high mechanical action allows one hand crimping to ASTM specifications. OAL 12"

89215	1/2" Close Quarters Crimp Tool	3.2 lbs. (1.45kg)
89216	3/4" Close Quarters Crimp Tool	3.2 lbs. (1.45kg)

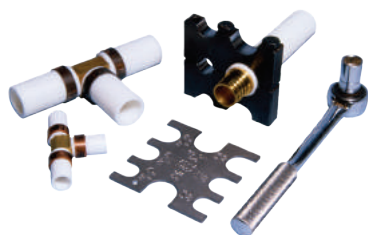

89217 CLAMP CRIMPER

The Close Quarters Tool crimps rings to ASTM F-1087 on 3/8", 1/2", 3/4", and 1" pipe. A wrench is used to torque the bolts down until the gap is eliminated. Convenient 1" and 3/4" on one side, flip over and 1/2" and 3/8" on the reverse. Complete with a gauge to assure crimps are to specifications. OAL 3 1/2"

Weight..... 1.5 lbs. (0.68kg)



89211 CLAMP REMOVAL TOOL

This unique tool allows fitting recovery with an effortless torquing action. Apply the socket to a "T" bar or socket wrench and place over the pinched clamp. By turning 90 degrees in a clockwise action and then counter-clockwise the clamp is sheared making fitting recovery quick and easy. Remove all clamps 3/8", 1/2", 5/8", 3/4" and 1" with ONE tool. Wrench nut supplied.

Weight..... 1 lb. (0.5kg)

MISCELLANEOUS TOOLS



RETRACTABLE UTILITY KNIFE

Featuring a curved, comfort design, internal blade storage, interlock system and toolless blade changing.

- 5741 Retractable Utility Knife Weight 0.4 lbs (0.2kg)
 5761 5 Pack of Replacement Blades



SELF-RETRACTING UTILITY KNIFE

Featuring a curved, comfort design, internal blade storage, interlock system and toolless blade changing.

- 5751 Retractable Utility Knife Weight 0.4 lbs (0.2kg)
 5761 5 Pack of Replacement Blades



DIAMETER TAPE

For measuring diameter or circumference of pipes and cylindrical objects.

- 71 Pocket size 6' (1.82m) linear / 22" (.56m) Diameter Tape.
 English/Metric Scales. Weight 0.35 lbs (0.16kg)

MANTIS™ REPLACEMENT BLADES

Blade Number	Material	Number of Teeth
475200	Alloy	8
475201		10
475202		14
475203		18
475204		24
475210	High-Speed Steel Bimetal	10
475211		14
475212		18
475213		24

Blade Selection Table

Select blade and cutting load appropriate for type, diameter and wall thickness of material to be cut.

Material		LL= Ultra light load L= Light load M= Medium load H= Heavy load				Alloy				High-Speed Steel				Grid
		8	10	14	18	24	10	14	18	24	Saw			
Steel Pipe		1/4" – 1"			L	L			L	L				
		1 1/4" – 3"			M	M			M	M				
		3 1/2" – 6"			H	H			H	H				
Stainless Steel	Sch 40	1/4" – 1"						L	L					
		1 1/4" – 3"						M	M					
		3 1/2" – 6"						H	H					
Polyethylene or Polypropylene					LL	LL			LL	LL				
Conduit		Thick Steel				M				M				
		Thin Steel				L	L			L	L			
Cast Iron Pipe					H				H					
Cast Iron Cement												H		
Steel	Section Steel	≤ 5/64"					LL					LL		
		3/32" – 5/32"			L	L			L	L				
		5/32" – 3/16"			M	M			M	M				
		1/4" – 5/16"		M	H			M	H					
		≥ 5/16"		H	H			H	H					
	Round Bar	≤ 5/8"			M	M			M	M				
		5/8" – 2"			H				H					
		2 1/32" – 3 1/4"	H	H					H	H				

WHEELER-REX 2'X2' GRID WALL DISPLAY



998042, 998043

- 998042 Wall Display Kit 2'x2'
1 Black and 1 Red Panel,
18 hooks per kit
- 998043 Wall Display Literature Holder Accessory
- 998037 Counter Mat
- 998022 Product Catalog
- 998027 Price List
- 998039 Threading Machine Mini Catalog
- 998040 Test Pump Mini Catalog
- 998041 Tubing Cutter Mini Catalog




998037




998022



998027

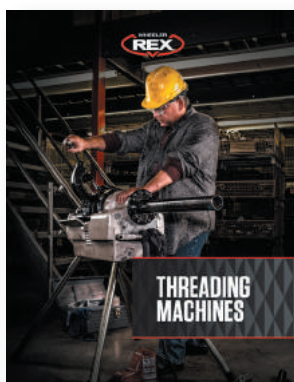

998039

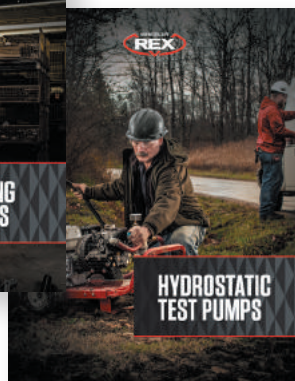

998040



998041

WHEELER-REX HISTORY



Wheeler Manufacturing was established in 1957 on the shores of Lake Erie, with the invention of the chain-type snap cutter for cast iron and clay tile pipes. A product that would become the first of many industry changing inventions.

In 1988, Wheeler became part of the Rex Industries family. Rex Industries is known for the highest quality and most innovative pipe threading machines in the world. Rex set the bar for threading machine standards on a global scale with features such as through the die head oiling, auto open die heads, notch-style adjustment, and ball detent die location.

Thus, WHEELER-REX was born. Blending the best of American and Japanese culture to create a company focused on product perfection, work ethic, employee pride, and customer success. Today, WHEELER-REX maintains its presence as one of the industry leaders in the Hydrostatic Test Pump and Threading Machine markets. As well as continuing to focus on expanding our line of pipe tools, accessories, and exemplary customer service staff.

VISIT THE WHEELER-REX WEBSITE



WHEELER-REX products are sold exclusively through an extensive network of distributors. To find your nearest location, use the "Where to Buy" feature located on our website, or give us a call! Also available are online catalogs, product information, parts diagrams, operation manuals, and other useful information.



WHEELER-REX

PO Box 688, 3744 Jefferson Road, Ashtabula, Ohio 44005
Tel: (440) 998-2788 Toll Free: 1-800-321-7950 Fax: (440) 992-2925
www.wheelerrex.com | Email: wheeler@wheelerrex.com

PRODUCT LISTING

Part No.	Description	Page
70	SHUT OFF TOOL 1-1/4"-2" SOFT COPPER	42
71	ENGLISH/METRIC 6 FOOT DIAMETER TAPE	56
75	SHUT OFF TOOL 3/8"-2" PLASTIC WATER LINES	42
77	SHUT OFF TOOL 3/8"-2" PLASTIC GAS LINES	42
85	SHUT OFF TOOL 3/4"- 1" COPPER LINES	42
86	SHUT OFF TOOL 1/2"- 1" COPPER LINES	42
450	TUBE CLEANING BRUSH 1/2" & 3/4" COPPER	28
452	REPLACEMENT BRUSH SET (453 AND 454)	28
522	COMPLETE CHAIN FOR 6" 490/590	6
528	COMPLETE CHAIN FOR 8" 590/490	6
532	COMPLETE CHAIN FOR 6" 590/490 W/ROLLERS	6
533	COMPLETE CHAIN FOR 8" 590/490 W/ROLLERS	6
519	CHAIN ROLLER ADAPTER KIT	6
600	PLASTIC PIPE HAND SAW 18"	36
601	PLASTIC PIPE HAND SAW 18", PTFE BLADE	36
602	PLASTIC PIPE HAND SAW 13"	36
603	PLASTIC PIPE HAND SAW 13", PTFE BLADE	36
610	REPLACEMENT 18" BLADE FOR 600 SAW	36
611	REPLACEMENT 18" BLADE FOR 601 SAW	36
612	REPLACEMENT 13" BLADE FOR 602 SAW	36
613	REPLACEMENT 13" BLADE FOR 603 SAW	36
626	26" CABLE SAW	36
636	36" CABLE SAW	36
640	POWER DRIVE W/CASE, ADAPTER&TORQUE VISE	12
642	POWER DRIVE ONLY W/CASE	12
841	STAND FOR 8991	16
850	FOLDING PIPE STAND W/ V HEAD	40
851	FOLDING PIPE STAND W/BT HEAD	40
854	BALL TRANSFER SET PAIR	40
856	V-HEAD W/ADJ. NUT	40
880	PIPE DOLLIE 3"-30"	41
892	T-HANDLE GUILLOTINE CUTTER, POINTED	39
919	5 PACK OF DEBURRING TOOLS	31
921	10 PACK OF DEBURRING TOOLS	31
925	50 PACK OF DEBURRING TOOLS	31
940	HD METRIC DS KIT-19,22,24MM	51
941	HD METRIC DS KIT-19,22,24,30MM	51
942	HD METRIC DS KIT-17,19,24,30MM	51
943	HD 19MM DEEP SOCKET	51
944	HD 22MM DEEP SOCKET	51
945	HD 24MM DEEP SOCKET	51
946	HD 30MM DEEP SOCKET	51
947	HD 17MM DEEP SOCKET	51
948	HD 27MM DEEP SOCKET	51
950	HD METRIC DS KIT-17,19,22,24,27,30	51
960	HD DEEP SOCKET KIT-980,981,982	51
961	HD DEEP SOCKET KIT-980,981,982,983	51
962	HD DEEP SOCKET KIT-980,982,983	51
963	HD DEEP SOCKET KIT-981,982,984,985	51
964	HD DEEP SOCKET KIT-981,982,983	51
965	HD DEEP SOCKET KIT-979,981,982	51
966	HD DEEP SOCKET KIT-978,979,980,981	51
967	HD SOCKET KIT (10 SOCKETS)978 THRU 987	51
978	3/4 HD DEEP SOCKET	51
979	7/8 HD DEEP SOCKET	51
980	15/16 HD DEEP SOCKET	51
981	1-1/16 HD DEEP SOCKET	51
982	1-1/4 HD DEEP SOCKET	51
983	1-1/8 HD DEEP SOCKET	51
984	1-5/16 HD DEEP SOCKET	51
985	1-7/16 HD DEEP SOCKET	51
986	1 HD DEEP SOCKET	51
987	1-1/2 HD DEEP SOCKET	51

Part No.	Description	Page
1300	PIPE SCRAPER, 3"-12"	7
1350	PIPE SCRAPER, 12"-36"	7
1590	INTERNAL PIPE CUTTER 1-1/2"	38
1660	HOLE CUTTER, GAS	46
1661	HOLE CUTTER, PNEUMATIC	46
1662	HOLE CUTTER, ELECTRIC	46
1663	HOLE CUTTER, HYDRAULIC	46
1664	HOLE CUTTER, LESS DRIVE	46
1697	T-HANDLE GUILLOTINE CUTTER 8", SS BLADE	39
1755	3/8"- 2-3/8" FREEZE KIT W/ 2CANS SPRAY	43
1894	GUILLOTINE CUTTER/POWER DRIVEN	39
1897	GUILLOTINE CUTTER, 14.2", V BLADE, T-HANDLE	39
1924	COMPLETE CHAIN FOR 8" 2990	6
1926	COMPLETE CHAIN FOR 6" 2990	6
1964	FASTITE 5/16" SOCKET 60IN LB	52
1965	FASTITE 3/8" SOCKET 80IN LB	52
1966	FASTITE 5/16" SOCKET 80IN LB	52
1977	SOIL PIPE TORQUE WRENCH,60in/lb 5/16"	4,52
1980	SOIL PIPE TORQUE WRENCH,80IN/LB 5/16"	4,52
1981	SOIL PIPE TORQUE WRENCH,80IN/LB 3/8"	4,52
1982	SOIL PIPE TORQUE WRENCH,80IN/LB 5/16"& 3/8"	4,52
2290	INTERNAL PIPE CUTTER 2"	38
2490	INTERNAL PIPE CUTTER 51MM	38
2492	INTERNAL PIPE CUTTER 2" SCH 80	38
2690	1/8"-2" STEEL PIPE CUTTER	7
3090	HOLE CUTTER W/MILW ADAPTER/NO DRILL	45
3091	HOLE CUTTER W/DEWALT ADAPTER/NO DRILL	45
3092	3090 HOLE CUTTER W/MILW DRILL	45
3093	3091 HOLE CUTTER W/DWLT DRILL	45
3290	INTERNAL PIPE CUTTER 3"	38
3590	1/8"-3/8" RATCH-CUT	28
3790	5/16"-1-1/8" RATCH CUT	28
3801	WHEELER HYDROYL ONE QUART	5
3804	WHEELER HYDROYL ONE GALLON	5
3824	COMPLETE CHAIN 12" FOR 389012	6
4006	PIPE VISE	41
4012	PIPE PULLER 4" - 14"	41
4015	PIPE VISE	41
4020	PIPE VISE	41
4028	PIPE VISE	41
4160	TRIPOD CHAIN VISE 1/8"-6"	40
4180	BENCH CHAIN VISE	40
4190	MICRO SNIPPER 1/4" TO 3/8"	35
4200	1/2"-2" MANUAL THREADER SET, NPT	12
4202	1/2"- 1" RATCHET THREADER SET, NPT	12
4207	1/2-1-1/4" MANUAL THREADER SET, NPT	12
4211	1"-2" MANUAL THREADER SET, NPT	12
4213	1/2"-2" MANUAL THREADER SET, NPT, NO CASE	12
4215	1/2-2"BSPT MANUAL THREADER SET, BSPT	12
4290	INTERNAL PIPE CUTTER 4"	38
4310	10" GRIPMASTER PIPE WRENCH	51
4314	14" GRIPMASTER PIPE WRENCH	51
4410	10" ALUMINUM STRAIGHT PIPE WRENCH	50
4414	14" ALUMINUM STRAIGHT PIPE WRENCH	50
4418	18" ALUMINUM STRAIGHT PIPE WRENCH	50
4424	24" ALUMINUM STRAIGHT PIPE WRENCH	50
4436	36" ALUMINUM STRAIGHT PIPE WRENCH	50
4448	48" ALUMINUM STRAIGHT PIPE WRENCH	50
4490	INTERNAL PIPE CUTTER 4" SCH 80	38
4506	COPPER TUBE CLEANER (6-IN-1) 1/2"&3/4"	28
4508	8"HD STRAIGHT IRON PIPE WRENCH	50
4510	10" HD STRAIGHT IRON PIPE WRENCH	50
4512	12" HD STRAIGHT IRON PIPE WRENCH	50

ORDER NOW

Eastern Time 1-800-321-7950

Fax 440-992-2925

wheeler@wheelerrex.com

PRODUCT LISTING

Part No.	Description	Page
4514	14" HD STRAIGHT IRON PIPE WRENCH	50
4518	18" HD STRAIGHT IRON PIPE WRENCH	50
4524	24" HD STRAIGHT IRON PIPE WRENCH	50
4536	36" HD STRAIGHT IRON PIPE WRENCH	50
4548	48" HD STRAIGHT IRON PIPE WRENCH	50
4560	60" HD STRAIGHT IRON PIPE WRENCH	50
4606	6" DIAMOND BLADE FOR DI & CI	9
4612	12" SPUD WRENCH	51
4616	6" DIAMOND ECONOMY BLADE	9
4690	2"-4" STEEL PIPE CUTTER	7
4700	HAMMERHEAD FLARING KIT, 3/4"-2" COPPER	31
4706	6.5" TCT BLADE FOR STEEL	9
4710	10" HD END IRON PIPE WRENCH	50
4714	14" HD END IRON PIPE WRENCH	50
4718	18" END IRON PIPE WRENCH	50
4724	24" END IRON PIPE WRENCH	50
4814	14" ALUMINUM OFF-SET PIPE WRENCH	50
4818	18" ALUMINUM OFF-SET PIPE WRENCH	50
4824	24" ALUMINUM OFF-SET PIPE WRENCH	50
4900	REROUNDING TOOL KIT 3/4"-2" COPPER	31
4906	RATCHET PIPE CTR 1-1/2 to 6	4
4908	RATCHET PIPE CTR 1-1/2 to 8	4
4910	BRASS HAMMER 3# FOR 4900	31
4916	RATCHET PIPE CUTTER 1-1/2"-6" W/519	4
4918	RATCHET PIPE CUTTER 1-1/2"-8" W/519	4
4992	CLOSE QUARTER CUTTER, COPPER&PLASTIC	29
5090	PIPE CUTTER 1/2"- 2"	7
5190	MINI SNIPPER 1/8" TO 1-1/4"	34
5191	MINI SNIPPER 1/8" TO 1-1/4", PTFE BLADE	34
5195	ECONOMY SNIPPER 1/8" - 1-1/4"	35
5210	COMPLETE CHAIN, 10" 490/590	6
5212	COMPLETE CHAIN, 12" 490/590	6
5215	COMPLETE CHAIN, 15" 490/590	6
5256	CHAIN EXTENSION 490/590 8 PINS	6
5258	CHAIN EXTENSION 490/590 14PINS	6
5291	PROFESSIONAL SNIPPER 5291, 1/8"- 1-5/8"	34
5295	ECONOMY SNIPPER 1/8" - 1-5/8"	35
5400	CHAIN WRENCH	53
5412	OPC,4-12" CUT & GRV STL & ALU	11
5524	COMPLETE CHAIN 18" FOR 559018	6
5624	PIPEMASTER II, 6" - 24"	8
5690	AUTO C CUTTER 1/2" (15.9MM)	28
5691	AUTO C CUTTER 3/4" (22.2MM)	28
5692	AUTO C CUTTER 1" (28.6MM)	28
5741	RETRACTABLE UTILITY KNIFE	56
5751	SELF-RETRACTING SAFETY KNIFE	56
5761	REPLACEMENT BLADE 5 PACK	56
5900	OIL BUCKET W/PUMP	12
5906	MANUAL PIPE CTR 1-1/2" to 6"	4
5908	MANUAL PIPE CTR 1-1/2 to 8	4
5916	MANUAL CUTTER 1-1/2"-6", W/519	4
5918	MANUAL PIPE CUTTER 1-1/2"-8", W/519	4
6000	INTERNAL PIPE CUTTER 6"	38
6412	OPMT CUT & BEVEL DIP 4"-12"	11
6500	HYDRAULIC POWER PACK	9
6590	THREADING MACHINE 2-1/2"-6"	15
6598	THREADING MACHINE 2-1/2-6"220V	15
6600	ROLL GROOVER, MANUAL	10
6790	THREADING MACHINE 1/2"-4"	15
6793	6790 THREADING MACHINE 1/2"-4"(NOTCH DH)	15
6794	6790 THREADING MACHINE 1/2"-4"(BLADE CTR)	15
6798	THREADING MACHINE 1/2"-4" 220V	15
7291	PROFESSIONAL SNIPPER 7291 1/8"- 2-7/16"	34

Part No.	Description	Page
7325	BLADE SHARPENER	35
7702	ROLL GROOVING MACHINE W/MANUAL PUMP	11
7703	ROLL GROOVING MACHINE W/POWER PUMP	11
7800	EARTHWORM HYDRO DRILL	46
7801	1 INCH AUGER	46
7802	2 INCH AUGER	46
7808	4 INCH REVERSE AUGER	46
7809	6 INCH REVERSE AUGER	46
7810	3 INCH AUGER	46
7914	3/8 PITCH CUTTER CHAIN	33
7922	1-1/2" GLASS CUTTER CHAIN, 3/8 PITCH	33
8001	CUTTER WHEEL	32
8003	CUTTER WHEEL	32
8004	CUTTER WHEEL - 4690 (8016)	32
8006	CUTTER WHEEL	32
8012	CUTTER WHEEL	32
8015	CUTTER WHEEL	32
8021	CUTTER WHEEL	32
8025	CUTTER WHEEL	32
8033	CUTTER WHEEL FOR PLASTIC 4992	32
8034	CUTTER WHEEL	32
8037	CUTTER WHEEL	32
8038	CUTTER WHEEL, 4990/ 4991/4992	32
8039	CUTTER WHEEL, 5090	32
8040	CUTTER WHEEL FOR 2590/3590, RC375	32
8041	CUTTER WHEEL FOR 2790/3790, RC1125	32
8042	CUTTER WHEEL FOR 4590	32
8043	CUTTER WHEEL FOR 4790	32
8044	CUTTER WHEEL FOR 2790 & 3790 HSS/SS	32
8045	CUTTER WHEEL	32
8046	CUTTER WHEEL FOR 5690/1/2,COPPER/CTS/CPVC	32
8050	CUTTER WHEEL FOR 95041 STEEL, STYLE HS4	32
8051	CUTTER WHEEL FOR 95041 CI/DI, STYLE H14	32
8052	CUTTER WHEEL FOR 95061 STEEL, STYLE HS6	32
8053	CUTTER WHEEL FOR 95061/81/121, CI/DI	32
8054	CUTTER WHEEL FOR 95081/121 STL	32
8066	CUTTER WHEEL FOR 90748,90749, PLASTIC	32
8067	CUTTER WHEEL FOR 90748,90749, COPPER,AL	32
8068	CUTTER WHEEL FOR 90747, PLASTIC	32
8069	CUTTER WHEEL (90710/721/727/734/747)	32
8071	CUTTER WHEEL FOR 90735/90728/90750 METAL	32
8073	CUTTER WHEEL FOR 90750 PLASTIC	32
8074	CUTTER WHEEL FOR 90737,90751 PLASTIC	32
8075	CUTTER WHEEL FOR 90738, 90752 PLASTIC	32
8076	CUTTER WHEEL FOR 95061/81/121,UNIVERSAL	32
8079	CUTTER WHEEL FOR 95041, UNIVERSAL	32
8082	CUTTER WHEEL FOR 2690 SS	32
8090	THREADING MACHINE 1/2"-2"	14
8096	THREADER 8090 W/2 DIE HEADS	14
8097	THREADER 8090 W/897065 DH	14
8098	THREADING MACHINE 1/2"-2" 220V	14
8100	HOT TAPPING SYSTEM 3/4"-1" NPT, STEEL/COPPER	44
8102	HOT TAPPING SYSTEM 3/4"-2" NPT, STEEL/COPPER	44
8200	HOT TAPPING SYSTEM 3/4"-1" CTS, STEEL/COPPER	44
8201	HOT TAPPING SYSTEM 3/4"-1" CTS, PLASTIC	44
8202	HOT TAPPING SYSTEM 3/4"-2" CTS, PLASTIC	44
8203	HOT TAPPING SYSTEM 3/4"-1" CTS, DI & CI	44
8204	HOT TAPPING SYSTEM 3/4"-2" CTS, DI & CI	44
8205	HOT TAPPING SYSTEM 3/4"-1" CTS, PLASTIC, DI, CI	44
8206	HOT TAPPING SYSTEM 3/4"-2" CTS, PLASTIC, DI, CI	44
8300	HOT TAPPING SYSTEM 3/4"-1"BSPT, STEEL, COPPER	44
8312	12" STRAP WRENCH, 1/2-2" PIPE	52
8318	18" STRAP WRENCH, 1-5" PIPE	52

PRODUCT LISTING

Part No.	Description	Page
8324	24" STRAP WRENCH, 2-12" PIPE	52
8400	ROLL GROOVER-6090,7090,8090	10
8401	ROLL GROOVER-300	10
8402	ROLL GROOVER FOR 300 COMPACT	10
8403	ROLL GROOVER 6790	10
8412	OPMT CUT BEVEL STEEL 4"-12"	11
8500	MINI PIPE SLICE-PIPELINER REPLACEMENT TOOL	47
8506	1/4 X 50' CABLE FOR MINI SLICE	47
8507	1/4 X 75' CABLE FOR MINI SLICE	47
8508	1/4 X 100' CABLE FOR MINI SLICE	47
8520	MINISLICE 50'-8506,8500,8611	47
8521	MINISLICE 75'-8507,8500,8611	47
8522	MINISLICE 100'-8508,8500,8611	47
8525	1/2-3/4 POLY PULLER	47
8570	SHUT OFF TOOL COMBO 85 & 70, 3/4"-2"	42
8600	PIPE SLICE	47
8601	PIPESLICE II-PIPELINE REPLACEMENT TOOL	47
8605	3/8" X 50' CABLE W/FERRULE	47
8606	3/8" X 75' CABLE W/FERRULE	47
8607	3/8" X 100' CABLE W/FERRULE	47
8608	3/8" X 150' CABLE W/FERRULE	47
8611	CABLE GRIP (FLAT)	47
8620	PIPESLICE II-50'8605,8601,8611	47
8621	PIPESLICE II-75'8606,8601,8611	47
8622	PIPESLICE II-100'8607,8601, 8611	47
8623	PIPESLICE II-150' 8608,8601, 8611	47
8625	3/4 POLY/COPPER PIPE PULLING FOR 8600	47
8626	1" POLY/COPPER PIPE PULLING FOR 8600	47
8627	PIPESLICE KIT-8600,8611,8605, 50'	47
8628	PIPESLICE KIT-8600,8611,8606, 75'	47
8629	PIPESLICE 100'-8607,8600,8611, 100'	47
8630	PIPESLICE KIT-8600,8611,8608, 150'	47
8640	PIPESLICE KIT II- 8601, 8646,8645,8648,8649	47
8641	PIPESLICE KIT II-8601, 8645,8646	47
8642	PIPESLICE KIT II - 8601, 8648, 8649, 8647	47
8645	3/4 PE PIPE PULLING ATTACHMENT FOR 8601	47
8646	1" PE PULLER ATTACHMENT FOR 8601	47
8647	3/4"+ 1" DOUBLE FLARE TOOL FOR 8601	47
8648	3/4" COPPER FLARE LOCKNUT FOR 8601	47
8649	1" COPPER FLARE LOCKNUT FOR 8601	47
8670	SHUT OFF TOOL COMBO 86 & 70 1/2"-2"	42
8700	FORGED HYDRANT WRENCH	53
8708	8" ALUMINUM VALVE WHEEL WRENCH	53
8714	14" ALUMINUM VALVE WHEEL WRENCH	53
8718	18" ALUMINUM VALVE WHEEL WRENCH	53
8806	6 FT ADJUST-A-KEY	49
8808	8 FT ADJUST-A-KEY	49
8900	SLIK-TAP DIRECT TAP LUBRICANT	45
8901	SLIK-TAP, 12 PACK CASE	45
8991	THREADING MACHINE 1/2"-1"	13
8992	THREADER 8991 W/60131 DH	13
8993	THREADER 8991 W/2 DIE HEADS	13
8998	THREADING MACHINE 1/2"-1" 220V	13
9000	POWER PLASTIC BEVELER	36
9001	MODEL 9000 WITH CARBIDE BIT	36
9015	PLASTIC PIPE BEVEL TOOL	36
9401	STANDARD BASIN WRENCH	52
9600	1-1/4 X 1-1/16 DOUBLE-UP WRENCH	51
9601	15/16 X 1 1/8 DOUBLE-UP WRENCH	51
9700	HYDRAULIC ROLL GROOVER W/BASE FOR 60/70/8090	10
9701	HYDRAULIC ROLL GROOVER W/BASE FOR 6790	10
9703	HYDRAULIC ROLL GROOVER W/BASE FOR 300	10
10050	1/2" CTS CHAMFER/BELVE TOOL/DEPTH GAUGE	38

Part No.	Description	Page
10075	3/4" CTS CHAMFER/BELVE TOOL/DEPTH GAUGE	38
10100	1" CTS CHAMFER/BELVE TOOL/DEPTH GAUGE	38
10125	1-1/4" CTS CHAMFER/BELVE TOOL/DEPTH GAUGE	38
10150	1-1/2" CTS CHAMFER/BELVE TOOL/DEPTH GAUGE	38
10200	2" CTS CHAMFER/BELVE TOOL/DEPTH GAUGE	38
10700	HYDRANT NUT DRIVER	49
13020	2" HINGED PIPE VISE	41
13040	2-1/2" HINGED PIPE VISE	41
13060	4" HINGED PIPE VISE	41
13080	5" HINGED PIPE VISE	41
13964	TORQUE LIMITING ADAPTER W/CTR/1" SQ DRIVE	48
13968	RISING STEM TORQUE ADAPTER	49
13970	RISING STEM HAND WHEEL ADAPTER, 681155	49
16010	1.5"-4" PIPE HOG KIT Sch 40	37
16150	1-1/2" PIPE HOG	37
16200	2" PIPE HOG	37
16300	3" PIPE HOG	37
16400	4" PIPE HOG	37
17500	REPLACEMENT POLAR GAS CANISTER	43
19010	CHAIN EXTENSION 8 PINS 2990	6
19012	CHAIN EXTENSION 14 PINS 2990	6
19015	CHAIN EXTENSION 20 PINS 2990	6
19020	FITTING SAVER KIT IPS SCH 40	37
19025	FITTING SAVER KIT IPS SCH 80	37
19030	1/2" CTS FITTING SAVER	37
19050	1/2" SCH 40 FITTING SAVER	37
19051	1/2" SCH 80 FITTING SAVER	37
19075	3/4" SCH 40 FITTING SAVER	37
19076	3/4" SCH 80 FITTING SAVER	37
19100	1" SCH 40 FITTING SAVER	37
19101	1" SCH 80 FITTING SAVER	37
29200	MANUAL TEST PUMP 300PSI	22
29201	MANUAL TEST PUMP 1000PSI	22
29900	MANUAL TEST PUMP W/TANK 870PSI	22
29906	2-6" HYDRAULIC PIPE CUTTER	5
29908	2-8" HYDRAULIC PIPE CUTTER	5
30050	1/2" IPS CHAMFER/BELVE TOOL/DEPTH GAUGE	38
30075	3/4" IPS CHAMFER/BELVE TOOL/DEPTH GAUGE	38
30100	1" IPS CHAMFER/BELVE TOOL/DEPTH GAUGE	38
30125	1-1/4" IPS CHAMFER/BELVE TOOL/DEPTH GAUGE	38
30150	1-1/2" IPS CHAMFER/BELVE TOOL/DEPTH GAUGE	38
30200	2" IPS CHAMFER/BELVE TOOL/DEPTH GAUGE	38
32150	PNEUMATIC TEST PUMP, 1GPM/1500PSI	26
32300	PNEUMATIC TEST PUMP, .5GPM / 3000PSI	26
32301	FLUID SECTION REPAIR KIT FOR 32300	26
32450	PNEUMATIC TEST PUMP, .88GPM, 10,000PSI	26
32900	3" CAPITOL STYLE CI CUTTER	7
33100	ELECTRIC TEST PUMP 1000psi 1GP	25
33101	ELECTRIC TEST PUMP (33100) 220V, 50HZ	25
35100	ELECTRIC TEST PUMP 500PSI 3GPM	25
35101	ELECTRIC TEST PUMP 220V 50HZ	25
36200	TEST PUMP,3.5GPM, 1200PSI, B&S ENGINE	23
36454	HYDROSTATIC TEST PUMP 400PSI, 10GPM	23
37210	ELECTRIC TEST PUMP 3000 PSI 3.5 GPM,208/230V 3-PHASE	25
39300	TEST PUMP 300PSI 4GPM 1/2HP	25
39301	39300 TEST PUMP,220V,60HZ	25
39906	HD RATCHET PIPE CUTTER 6"	4
39908	HD RATCHET PIPE CUTTER 8"	4
40020	20MM POLY CHAMFER/BELVE TOOL/DEPTH GAUGE	38
40025	25MM POLY CHAMFER/BELVE TOOL/DEPTH GAUGE	38
40032	32MM POLY CHAMFER/BELVE TOOL/DEPTH GAUGE	38
40040	40MM POLY CHAMFER/BELVE TOOL/DEPTH GAUGE	38

ORDER NOW | Eastern Time 1-800-321-7950 | Fax 440-992-2925 | wheeler@wheelerrex.com

PRODUCT LISTING

Part No.	Description	Page
40050	50MM POLY CHAMFER/BEVEL TOOL/DEPTH GAUGE	38
40063	63MM POLY CHAMFER/BEVEL TOOL/DEPTH GAUGE	38
42900	4" CAPITOL STYLE CI CUTTER	7
46200	HYDROSTATIC TEST PUMP 1200PSI 3.5GPM B&S	23
46301	HYDROSTATIC TEST PUMP 300PSI 5.4GPM B&S	23
46453	HYDROSTATIC TEST PUMP 400PSI 10GPM	23
46501	HYDROSTATIC TEST PUMP 500PSI, 10GPM UDOR/B&S/ CART	24
46503	HYDROSTATIC TEST PUMP 500PSI, 10GPM UDOR/B&S/ ROLL CAGE	24
46521	HYDROSTATIC TEST PUMP 500PSI, 10GPM COMET/B&S/ CART	24
46523	HYDROSTATIC TEST PUMP 500PSI 10GPM COMET/B&S/ ROLL CAGE	24
46600	HYDROSTATIC TEST PUMP 300PSI, 15GPM B&S	24
46701	HYDROSTATIC TEST PUMP 500PSI, 10GPM 46501 W/ TANK B&S	24
46800	HYDROSTATIC TEST PUMP 250PSI, 26GPM, 8HP	24
47100	HYDROSTATIC TEST PUMP 1000PSI, ELECTRIC 115V 60HZ 2.2GPM	25
47101	HYDROSTATIC TEST PUMP 1000PSI, ELECTRIC 220V 50HZ 2.2GPM	25
47102	HYDROSTATIC TEST PUMP 2000PSI, ELECTRIC 115V 60HZ 1.1GPM	25
47103	HYDROSTATIC TEST PUMP 2000PSI, ELECTRIC 220V 50HZ 1.1GPM	25
47105	HYDROSTATIC TEST PUMP 2000PSI, ELECTRIC 115V 60HZ 2.2GPM	25
49010	RATCHET PIPE CTR 1-1/2" to 10"	4
49012	RATCHET PIPE CTR 1-1/2" to 12"	4
49015	RATCHET PIPE CUTTER 2"-15"	4
49075	REROUNDING TOOL 3/4"	31
49100	REROUNDING TOOL 1"	31
49150	REROUNDING TOOL 1-1/2"	31
49200	REROUNDING TOOL 2"	31
50100	INNER-OUTER REAMER 3/8"-2" 10MM-54MM	31
52510	CHAIN EXTENSION 490/590 20 PINS 6"	6
52512	CHAIN EXTENSION 490/590 26 PINS 8"	6
56200	2 INCH TRASH PUMP	27
56201	56200 WITH WHEELED CART	27
56300	3 INCH TRASH PUMP	27
56301	56300 WITH WHEELED CART	27
56310	3" MUDSUCKER DIAPHRAGM PUMP	27
59010	MANUAL PIPE CUTTER 1-1/2"-10"	4
59012	MANUAL PIPE CUTTER 1-1/2"-12"	4
59015	MANUAL PIPE CUTTER 2"-15"	4
60504	COLLAPSIBLE CART FOR MANTIS	16
60506	WHEELED CART FOR 6390/6790	16
60507	WHEELED CART W/TOOL BOX, 6390/6790	16
60508	COLLAPSIBLE CART FOR 7090	16
60509	COLLAPSIBLE CART FOR 6090	16
60512	COLLAPSIBLE CART FOR 300	16
60513	COLLAPSIBLE CART FOR 8090	16
60514	WHEELED CART FOR 6590	16
60515	WHEEL CART W/TOOLBOX FOR 6590	16
60601	THREADMASTER OIL GALLON JUG	16
60602	THREADMASTER OIL 5 GALLON PAIL	16
60603	THREADMASTER OIL 2 QUART BOTTLE	16
60604	THREADMASTER OIL 1 QUART BOTTLE	16
60607	THREADMASTER SS OIL 1 GALLON	16
60608	THREADMASTER SS OIL 5 GALLON	16
62000	NIPPLE ATTACHMENT NPT 1/2"	16
62001	NIPPLE ATTACHMENT NPT 3/4"	16

Part No.	Description	Page
62002	NIPPLE ATTACHMENT NPT 1"	16
62003	NIPPLE ATTACHMENT NPT 1-1/4"	16
62004	NIPPLE ATTACHMENT NPT 1-1/2"	16
62005	NIPPLE ATTACHMENT NPT 2"	16
62006	NIPPLE ATTACHMENT NPT 2-1/2"	16
62007	NIPPLE ATTACHMENT NPT 3"	16
62009	NIPPLE ATTACHMENT NPT 4"	16
68115	POWER DRIVE 22rpm, 115v, 50/60HZ, 1/2HP	48
68315	POWER DRIVE 66rpm, 115v, 50/60HZ, 1/2HP	48
69012	GLASS TUBE CUTTER 1/4"-3/4"	33
79014	GLASS TUBE CUTTER 1/4"-1"	33
79022	GLASS TUBE CUTTER 1/4"-1-1/2"	33
86075	3/4 CC PVC DRILL TAP	45
86100	1 CC PVC DRILL TAP	45
88024	2 FOOT KEY EXTENSION	49
89075	3/4" DRILL TAP	45
89100	1" DRILL TAP	45
89150	1-1/2" DRILL TAP	45
89200	2" DRILL TAP	45
89202	1/2" PEX RING CRIMPER	54
89203	3/4" PEX RING CRIMPER	54
89204	1" PEX RING CRIMPER	54
89206	1/2" & 3/4" PEX COMBO CRIMPER	54
89210	1/2" - 1" RING REMOVER	54
89211	CLAMP REMOVAL TOOL	55
89215	1/2" CLOSE QTRS CRIMP TOOL	55
89216	3/4" CLOSE QTRS CRIMP TOOL	55
89217	COMBO CLAMP STYLE CRIMPER	55
89250	SS CLAMP PINCHER	54
90710	TUBING CUTTER 1/8"-1-1/8", CU/AL	30
90721	MINI TUBING CUTTER 1/8"-1", CU/AL	29
90724	MINI TUBING CUTTER 1/8"-1-1/8", SS	30
90727	MINI TUBING CUTTER 1/8"-1-1/8", CU/AL	29
90730	TUBING CUTTER 1/8"-1-3/4" SS	30
90734	TUBING CUTTER 1/8"-1-3/8", TELESCOPIC	29
90747	TUBING CUTTER 1/4"-3" QUICK RELEASE	30
90748	TUBING CUTTER 2"-5" QUICK RELEASE	30
90749	TUBING CUTTER 4"-6-5/8" QUICK RELEASE	30
90764	TUBING CUTTER 1/4"-3" SS	30
90799	CUTTER WHEEL FOR SS TUBING CUTTERS	30
95240	HINGED PIPE CUTTER 2"- 4"	7
95460	HINGED PIPE CUTTER 4"- 6"	7
95680	HINGED PIPE CUTTER 6"-8"	7
95121	HINGED PIPE CUTTER 8"-12"	7
98001	VALVEMASTER FRWD CTR HONDA	48
98003	VALVEMASTER 2 WAY CTR HONDA	48
192410	COMPLETE CHAIN 10" FOR 299010	6
192412	COMPLETE CHAIN 12" FOR 299012	6
192415	COMPLETE CHAIN 15" FOR 299015	6
299010	2-10" HYDRAULIC PIPE CUTTER	5
299012	2-12" HYDRAULIC PIPE CUTTER	5
299015	2-15" HYDRAULIC PIPE CUTTER	5
362000	HYDROSTATIC TEST PUMP, 3.5GPM 1200PSI HONDA	23
363020	FIRE HOSE TEST PUMP - 2 HOSE	26
363040	FIRE HOSE TEST PUMP - 4 HOSE	26
363060	GAS FIRE HOSE TEST PUMP 10GPM, 400PSI	26
364540	HYDROSTATIC TEST PUMP WITH HONDA ENGINE	23
373080	HYDROSTATIC TEST PUMP HONDA, 3.5GPM/3000PSI	23
382415	COMPLETE CHAIN 15" FOR 389015	6
382418	COMPLETE CHAIN 18" FOR 389018	6
382424	COMPLETE CHAIN 24" FOR 389024	6
382515	CHAIN EXTENSION 8 PINS 3890	6
382518	CHAIN EXTENSION 14 PINS 3890	6

PRODUCT LISTING

Part No.	Description	Page
382520	CHAIN EXTENSION 20 PINS 3890	6
382524	CHAIN EXTENSION 26 PINS 3890	6
389012	4"-12" HYDRAULIC PIPE CUTTER	5
389015	4"-15" HYDRAULIC PIPE CUTTER	5
389018	4"-18" HYDRAULIC PIPE CUTTER	5
389024	4"-24" HYDRAULIC PIPE CUTTER	5
400600	PIPE VISE W/LEGS 3/4"-6"	41
401500	PIPE VISE W/LEGS 3/4"-15"	41
402000	PIPE VISE W/LEGS 3/4"-20"	41
402800	PIPE VISE W/LEGS 3/4"-28"	41
462000	HYDROSTATIC TEST PUMP 1200PSI, 3.5GPM HONDA ENGINE	23
463010	HYDROSTATIC TEST PUMP 300PSI, 5.4GPM HONDA ENGINE	23
464530	HYDROSTATIC TEST PUMP 400PSI, 10GPM HONDA ENGINE	23
465010	HYDROSTATIC TEST PUMP 500PSI, 10GPM UDOR/HONDA/ CART	24
465030	HYDROSTATIC TEST PUMP 500PSI, 10GPM UDOR/HONDA/ ROLL CAGE	24
465210	HYDROSTATIC TEST PUMP 500PSI, 10GPM COMET/HONDA/ CART	24
465230	HYDROSTATIC TEST PUMP 500PSI, 10GPM COMET/HONDA/ CAGE	24
466000	HYDROSTATIC TEST PUMP 300PSI, 15GPM HONDA ENGINE	24
467010	HYDROSTATIC TEST PUMP 500PSI, 10GPM HONDA ENGINE	24
468000	HYDROSTATIC TEST PUMP 250PSI, 26GPM HONDA ENGINE	24
475200	BAND SAW BLADE-ALLOY 8 TEETH	56
475201	BAND SAW BLADE- ALLOY 10 TEETH	56
475202	BAND SAW BLADE- ALLOY 14 TEETH	56
475203	BAND SAW BLADE- ALLOY 18 TEETH	56
475204	BAND SAW BLADE- ALLOY 24 TEETH	56
475210	BAND SAW BLADE - BI METAL 10 TEETH	56
475211	BAND SAW BLADE - BI METAL 14 TEETH	56
475212	BAND SAW BLADE - BI METAL 18 TEETH	56
475213	BAND SAW BLADE - BI METAL 24 TEETH	56
552420	COMPLETE CHAIN 20" FOR 559020	6
552424	COMPLETE CHAIN 24" FOR 559024	6
552436	COMPLETE CHAIN 36" FOR 559036	6
552520	CHAIN EXTENSION 4 PINS 5590	6
552524	CHAIN EXTENSION 10 PINS 5590	6
552536	CHAIN EXTENSION 28 PINS 5590	6
559018	6"-18" HYDRAULIC PIPE CUTTER	5
559020	6"-20" HYDRAULIC PIPE CUTTER	5
559024	6"-24" HYDRAULIC PIPE CUTTER	5
559036	6"-36" HYDRAULIC PIPE CUTTER	5
562000	2" TRASH PUMP W/HONDA ENGINE	27
562001	SAME AS 562000 WITH WHEELED CART	27
563000	3" TRASH PUMP W/HONDA ENGINE	27
563001	SAME AS 563000 WITH WHEELED CART	27
563100	3" MUDSUCKER DIAPHRAGM PUMP/HONDA	27
681150	POWER DRIVE W/CLUTCH & COUNTER, 250FT LBS 22RPM 115V 6 AMPS	48
681155	HAND WHEEL VALVE EXERCISER W/COUNTER & TORQUE ADAPTER, 22RPM	48
683155	HAND WHEEL VALVE EXERCISER W/COUNTER & TORQUE ADAPTER, 66RPM	48
802050	3/4" CTS ADAPTER	44
802051	3/4" NPT ADAPTER	44
802052	1" CTS ADAPTER	44
802053	1" NPT ADAPTER	44
802054	1-1/4" CTS ADAPTER	44
802055	1-1/4" NPT ADAPTER	44
802056	1-1/2" CTS ADAPTER	44
802057	1-1/2" NPT ADAPTER	44
802058	2" CTS ADAPTER	44

Part No.	Description	Page
802059	2" NPT ADAPTER	44
802060	1-1/2" ADAPTER FOR MUELLER 110	44
802061	2" ADAPTER FOR MUELLER 110	44
802071	3/4" BSPT ADAPTER	44
802072	1" BSPT ADAPTER	44
802073	1-1/4" BSPT ADAPTER	44
802074	1-1/2" BSPT ADAPTER	44
802075	2" BSPT ADAPTER	44
802084	1-3/8 PVC CUTTER SHELL	44
802085	1-7/8 PVC CUTTER	44
897065	DIE HEAD UNIVERSAL MANUAL OPEN 1/8"-2" NPT/NPSM/ UNC/8090	14
903071	11/16HSS CUTTER SHELL (502723)	44
903072	1" HSS CUTTER SHELL 506542	44
903073	1-1/4" CUTTER SHELL 506547	44
903074	1-1/2" CUTTER SHELL WITH 908097 BUSHING	44
903075	2" HSS CUTTER SHELL WITH 908097 BUSHING	44
904065	11/16 CUTTER FOR 3/4 DI TAP	44
904066	7/8 CUTTER FOR 1" DI TAP	44
904067	1-1/8 DI HS FOR 1-1/4 TAP	44
904068	1-3/8 CUTTER FOR 1-1/2 DI TAP	44
904069	1-7/8 CUTTER FOR 2" DI TAP	44

ORDER NOW

Eastern Time 1-800-321-7950

Fax 440-992-2925

wheeler@wheelerrex.com



WHEELER-REX

3744 Jefferson Rd.
Ashtabula OH USA 44004

Toll Free: 1-800-321-7950

Fax: 440-992-2925

E-mail: wheeler@wheelerrex.com

wheelerrex.com

© Rex International USA Inc.

Printed in U.S.A.